

HATCH LEGEND

INTERIOR ELEVATIONS
 SHEET NUMBER
 DETAIL NUMBER

DETAIL REFERENCE
 DETAIL NUMBER
 SHEET NUMBER

EXTERIOR ELEVATION REFERENCE
 DETAIL NUMBER
 SHEET NUMBER

WALL SECTION REFERENCE
 DETAIL NUMBER
 SHEET NUMBER

BUILDING SECTION REFERENCE
 DETAIL NUMBER
 SHEET NUMBER

DETAIL REFERENCE
 DETAIL NUMBER
 SHEET NUMBER

DETAIL REFERENCE
 SHEET NUMBER
 DETAIL NUMBER

ROOM DESIGNATION (FLOOR PLAN)
 ROOM NAME
 ROOM NUMBER

ROOM DESIGNATION (REFLECTED CEILING PLAN)
 ROOM NUMBER
 CEILING HEIGHT ABOVE FINISH FLOOR

ELEVATION SYMBOL
 ELEVATION DESCRIPTION
 ELEVATION ABOVE DATUM

ASSEMBLY TYPE DESIGNATION
 ASSEMBLY TYPE (FLOOR, WALL, CEILING, ROOF)

DOOR DESIGNATION
 DOOR NUMBER

WINDOW DESIGNATION
 WINDOW TYPE

KEYED NOTE DESIGNATION
 KEY NOTE NUMBER

EQUIPMENT DESIGNATION
 EQUIPMENT NAME
 EQUIPMENT MARK

GLASS TYPE DESIGNATION
 GLASS TYPE

MATCH LINE
 MATCH LINE TAG
 DETAIL / SHEET NUMBER

EXISTING WALL TO REMAIN

WALL TO BE DEMOLISHED

NEW WALL

CENTER LINE SYMBOL

BREAK LINE

ROUND BREAK LINE

NORTH ARROW
 TRUE NORTH
 PLAN NORTH

CASEWORK TYPE DESIGNATION
 AWS STANDARD CDS NUMBERING SYSTEM
 CDS NUMBER (M DENOTES MODIFICATION - SEE SHEET A551 FOR MODIFIED MILLWORK ELEVATIONS AND DETAILS)

MATERIAL TYPE DESIGNATION
 SEE A601 FINISH LEGEND







SLOPE INDICATION
 RUN
 RISE

REVISION DESIGNATION
 REVISION NUMBER
 REVISION CLOUD

GRAPHIC SCALES
 1" = 1'-0" GRAPHIC SCALE

ROOM FINISH DESIGNATION
 SEE A601 FINISH LEGEND

Room Name
 ROOM NUMBER
 CEILING FINISH
 WALL FINISH
 BASE
 FLOORING
 ROOM AREA

	CAST-IN-PLACE CONCRETE		CONTINUOUS MASONRY UNIT
	CONCRETE MASONRY UNIT		NON-CONTINUOUS MASONRY UNIT (BLOCKING)
	PRECAST CONCRETE / GLASS FIBER REINFORCED CONCRETE (GFRP)		GYPSUM BOARD
	EXTERIOR SHEATHING		PLYWOOD
	BRICK VENEER		UNDISTURBED EARTH
	RIGID INSULATION		GRAVEL
	BATT INSULATION		BACKFILL OR FILL
	LOOSE-FILL INSULATION		

COVER SHEET - BP3
GENERAL INFORMATION & SHEET INDEX - BP3
GENERAL CODE REQUIREMENTS
GENERAL CODE REQUIREMENTS
EXITING AND OCCUPANCY PLANS (TYPICAL)
VERTICAL ASSEMBLY TYPES
HORIZONTAL ASSEMBLY TYPES
ACCESSIBILITY COMPLIANCE

GENERAL NOTES AND DETAILS
GENERAL DETAILS
GENERAL DETAILS
STORMTECH BASIN 1
STORMTECH BASIN 2
STORMTECH BASIN 3
STORMTECH BASIN 4
APWA AND PROVO CITY DETAILS

ENLARGED SITE PLAN	A-201	BUILDING ELEVATIONS - BLOCKS A,B,C,D
ENLARGED SITE PLAN	A-202	BUILDING ELEVATIONS - BLOCK E
LINE AND CURVE TABLES	A-203	BUILDING ELEVATIONS - BREEZEWAY
OVERALL UTILITY PLAN	A-204	BUILDING ELEVATIONS - MOCK UP
PHASE 1 OVERALL UTILITY PLAN	A-210	ENLARGED BUILDING ELEVATIONS
SEWER PLAN AND PROFILE	A-301	BUILDING SECTIONS
SEWER PLAN AND PROFILE	A-302	BUILDING SECTIONS
SEWER PLAN AND PROFILE	A-351	WALL SECTIONS
SEWER PLAN AND PROFILE	A-352	WALL SECTIONS
SEWER PLAN AND PROFILE	A-421	ENLARGED PLANS - UNIT 2
SEWER PLAN AND PROFILE	A-422	ENLARGED PLANS - UNIT 2 ADA
STORM DRAIN PLAN AND PROFILE	A-423	ENLARGED PLANS - UNIT 3
STORM DRAIN PLAN AND PROFILE	A-424	ENLARGED PLANS - UNIT 3 ADA
STORM DRAIN PLAN AND PROFILE	A-425	EQUIPMENT PLANS & SCHEDULE
STORM DRAIN PLAN AND PROFILE	A-451	ENLARGED STAIR PLANS
STORM DRAIN PLAN AND PROFILE	A-452	BREEZEWAY CONTROL PLAN & RCP'S
STORM DRAIN PLAN AND PROFILE	A-501	ARCHITECTURAL DETAILS - EXTERIOR, LE
STORM DRAIN PLAN AND PROFILE	A-502	ARCHITECTURAL DETAILS - EXTERIOR, LE
STORM DRAIN PLAN AND PROFILE	A-521	ARCHITECTURAL DETAILS - SECTIONS
STORM DRAIN PLAN AND PROFILE	A-522	ARCHITECTURAL DETAILS - SECTIONS
STORM DRAIN PLAN AND PROFILE	A-523	ARCHITECTURAL DETAILS - SECTIONS
WATER PLAN AND PROFILE	A-561	MILLWORK DETAILS
WATER PLAN AND PROFILE	A-601	DOOR & WINDOW SCHEDULE AND LEGEND
WATER PLAN AND PROFILE	A-602	DOOR & WINDOW DETAILS
WATER PLAN AND PROFILE	A-701	TYPICAL DETAILS - WOOD FRAMING
WATER PLAN AND PROFILE	A1601	ROOM FINISH LEGEND AND DETAILS

ENLARGED GRADING PLAN	FP101AB	LEVEL 01 FIRE PROTECTION PLAN - BLOCKS A & B
ENLARGED GRADING PLAN	FP101CD	LEVEL 01 FIRE PROTECTION PLAN - BLOCKS C & D
OVERALL HYDROLOGY PLAN	FP101E	LEVEL 01 FIRE PROTECTION PLAN - BLOCK E
ENLARGED HYDROLOGY PLAN	FP102AB	LEVEL 02 FIRE PROTECTION PLAN - BLOCKS A & B
ENLARGED HYDROLOGY PLAN	FP102CD	LEVEL 02 FIRE PROTECTION PLAN - BLOCKS C & D
EROSION CONTROL PLAN	FP102E	LEVEL 02 FIRE PROTECTION PLAN - BLOCK E
EROSION CONTROL DETAILS	FP103AB	LEVEL 03 FIRE PROTECTION PLAN - BLOCKS A & B
	FP103CD	LEVEL 03 FIRE PROTECTION PLAN - BLOCKS C & D
	FP103E	LEVEL 03 FIRE PROTECTION PLAN - BLOCK E
OVERALL SITE PLAN	FP500	FIRE PROTECTION DETAILS & SCHEDULES

OVERALL SITE PLAN FP500 FIRE PROTECTION DETAILS & SCHEDULES

ARCHITECTURAL SITE PLAN - PHASE
DOUBLE TRASH ENCLOSURE
BLDG TYPES
BLDG TYPES - ROOF PLAN
LEVEL 01 CONTROL PLAN - BLDG 1,2
LEVEL 01 CONTROL PLAN - BLDG 3,4,5
LEVEL 01 FLOOR PLAN - BLOCKS A &
LEVEL 01 FLOOR PLAN - BLOCKS C &

LEVEL 02 & 03 FLOOR PLAN - BLOCKS C & D
LEVEL 02 & 03 FLOOR PLAN - BLOCK E
ROOF LEVEL FLOOR PLAN - BLOCKS A & B
ROOF LEVEL FLOOR PLAN - BLOCKS C & D
ROOF LEVEL FLOOR PLAN - BLOCK E
ROOF RIDGE PLAN - BLOCKS A & B
ROOF RIDGE PLAN - BLOCKS C & D
ROOF RIDGE PLAN - BLOCK E

BUILDING ELEVATIONS - BLOCKS A,B,C,D
BUILDING ELEVATIONS - BLOCK E
BUILDING ELEVATIONS - BREEZEWAY
BUILDING ELEVATIONS - MOCK UP
ENLARGED BUILDING ELEVATIONS

WALL SECTIONS
WALL SECTIONS
ENLARGED PLANS - UNIT 2
ENLARGED PLANS - UNIT 2 ADA
ENLARGED PLANS - UNIT 3
ENLARGED PLANS - UNIT 3 ADA
EQUIPMENT PLANS & SCHEDULE
ENLARGED STAIR PLANS
BREEZEWAY CONTROL PLAN & RCP'S
ARCHITECTURAL DETAILS - EXTERIOR, LEVEL 01
ARCHITECTURAL DETAILS - EXTERIOR, LEVEL 02 & 03
ARCHITECTURAL DETAILS - SECTIONS
ARCHITECTURAL DETAILS - SECTIONS
ARCHITECTURAL DETAILS - SECTIONS
MILLWORK DETAILS
DOOR & WINDOW SCHEDULE AND LEGENDS
DOOR & WINDOW DETAILS
TYPICAL DETAILS - WOOD FRAMING
ROOM FINISH LEGEND AND DETAILS

LEVEL 01 FIRE PROTECTION PLAN - BLOCKS A & B
LEVEL 01 FIRE PROTECTION PLAN - BLOCKS C & D
LEVEL 01 FIRE PROTECTION PLAN - BLOCK E
LEVEL 02 FIRE PROTECTION PLAN - BLOCKS A & B
LEVEL 02 FIRE PROTECTION PLAN - BLOCKS C & D
LEVEL 02 FIRE PROTECTION PLAN - BLOCK E
LEVEL 03 FIRE PROTECTION PLAN - BLOCKS A & B
LEVEL 03 FIRE PROTECTION PLAN - BLOCKS C & D
LEVEL 03 FIRE PROTECTION PLAN - BLOCK E
FIRE PROTECTION DETAILS & SCHEDULES

MECHANICAL SCHEDULES AND SYMBOL LEGEND
LEVEL 01 MECHANICAL RADON PLAN - BLOCKS A & B
LEVEL 01 MECHANICAL RADON PLAN - BLOCKS C & D
LEVEL 01 MECHANICAL RADON PLAN - BLOCKS E & A
LEVEL 01 MECHANICAL PLAN - BLOCKS A & B
LEVEL 01 MECHANICAL PLAN - BLOCKS C & D
LEVEL 01 MECHANICAL PLAN - BLOCKS E & A
LEVEL 02 MECHANICAL PLAN - BLOCKS A & B
LEVEL 02 MECHANICAL PLAN - BLOCKS C & D
LEVEL 02 MECHANICAL PLAN - BLOCKS E & A
LEVEL 03 MECHANICAL PLAN - BLOCKS A & B
LEVEL 03 MECHANICAL PLAN - BLOCKS C & D
LEVEL 03 MECHANICAL PLAN - BLOCKS E & A
ROOF MECHANICAL PLAN - BLOCKS A & B
ROOF MECHANICAL PLAN - BLOCKS C & D
ROOF MECHANICAL PLAN - BLOCKS E & A
MECHANICAL DETAILS

PLUMBING SCHEDULES AND SYMBOL LEGEND
BLD TYPES

LEVEL 01 PLUMBING PLAN - BLOCKS A & B - WASTE & VENT
LEVEL 01 PLUMBING PLAN - BLOCKS C & D - WASTE & VENT
LEVEL 02 PLUMBING PLAN - BLOCKS E - WASTE & VENT
LEVEL 01 PLUMBING PLAN - BLOCKS A & B - WATER & GAS
LEVEL 01 PLUMBING PLAN - BLOCKS C & D - WATER & GAS
LEVEL 01 PLUMBING PLAN - BLOCK E - WATER & GAS
LEVEL 02 PLUMBING PLAN - BLOCKS A & B - WASTE & VENT
LEVEL 02 PLUMBING PLAN - BLOCKS C & D - WASTE & VENT
LEVEL 02 PLUMBING PLAN - BLOCK E - WASTE & VENT
LEVEL 02 PLUMBING PLAN - BLOCKS A & B - WATER & GAS
LEVEL 02 PLUMBING PLAN - BLOCKS C & D - WATER & GAS
LEVEL 02 PLUMBING PLAN - BLOCK E - WATER & GAS
LEVEL 03 PLUMBING PLAN - BLOCKS A & B - WASTE & VENT
LEVEL 03 PLUMBING PLAN - BLOCKS C & D - WASTE & VENT
LEVEL 03 PLUMBING PLAN - BLOCK E - WASTE & VENT
LEVEL 03 PLUMBING PLAN - BLOCKS A & B - WATER & GAS
LEVEL 03 PLUMBING PLAN - BLOCKS C & D - WATER & GAS
LEVEL 03 PLUMBING PLAN - BLOCK E - WATER & GAS

ROOF PLUMBING PLAN
ROOF PLUMBING PLAN


PLUMBING DETAILS

PLUMBING DIAGRAMS

GAS FLOW DIAGRAMS

WASTE & VENT ISOMETRIC

GENERAL NOTES AND SYMBOLS LEGEND
DETAILS
DETAILS & MECHANICAL SCHEDULE
PROVO FORM DETAILS
FSLD-OVERALL
PANEL SCHEDULES
PANEL SCHEDULES
PANEL SCHEDULES
PANEL SCHEDULES
PANEL SCHEDULES
SHORT CIRCUIT ANALYSIS PHASE 1
PSLD PHASE 1
PSLD WT5
PSLD WT6
PSLD WT7
NEC LOAD CALC
LIGHT FIXTURE SCHEDULE
LEVEL 1 RCP BLOCKS A&B - LIGHTING
LEVEL 1 RCP BLOCKS C&D - LIGHTING
LEVEL 1 RCP BLOCKS E&A - LIGHTING
LEVEL 2 RCP BLOCKS A&B - LIGHTING
LEVEL 2 RCP BLOCKS C&D - LIGHTING
LEVEL 2 RCP BLOCKS E&A - LIGHTING
LEVEL 3 RCP BLOCKS A&B - LIGHTING
LEVEL 3 RCP BLOCKS C&D - LIGHTING
LEVEL 3 RCP BLOCK E&A - LIGHTING
ROOF RCP BLOCKS A&B/C&D - LIGHTING
ROOF RCP BLOCKS E&A - LIGHTING
LEVEL 1 FLOOR PLAN BLOCKS A&B - ELECTRICAL
LEVEL 1 FLOOR PLAN BLOCKS C&D - ELECTRICAL
LEVEL 1 FLOOR PLAN BLOCKS E&A - ELECTRICAL
LEVEL 2 FLOOR PLAN BLOCKS A&B - ELECTRICAL
LEVEL 2 FLOOR PLAN BLOCKS C&D - ELECTRICAL
LEVEL 2 FLOOR PLAN BLOCKS E&A - ELECTRICAL
LEVEL 3 FLOOR PLAN BLOCKS A&B - ELECTRICAL
LEVEL 3 FLOOR PLAN BLOCKS C&D - ELECTRICAL
LEVEL 3 FLOOR PLAN BLOCKS E&A - ELECTRICAL
ROOF FLOOR PLAN BLOCKS A&B - ELECTRICAL
ROOF FLOOR PLAN BLOCKS C&D - ELECTRICAL
ROOF FLOOR PLAN BLOCKS E&A - ELECTRICAL
LEVEL 1 FLOOR PLAN BLOCKS A&B - FIRE ALARM
LEVEL 1 FLOOR PLAN BLOCKS C&D - FIRE ALARM
LEVEL 1 FLOOR PLAN BLOCKS E&A - FIRE ALARM
LEVEL 2 FLOOR PLAN BLOCKS A&B - FIRE ALARM
LEVEL 2 FLOOR PLAN BLOCKS C&D - FIRE ALARM
LEVEL 2 FLOOR PLAN BLOCKS E&A - FIRE ALARM
LEVEL 3 FLOOR PLAN BLOCKS A&B - FIRE ALARM
LEVEL 3 FLOOR PLAN BLOCKS C&D - FIRE ALARM
LEVEL 3 FLOOR PLAN BLOCKS E&A - FIRE ALARM
ROOF FLOOR PLAN BLOCKS A&B/C&D - FIRE ALARM
ROOF FLOOR PLAN BLOCKS E&A - FIRE ALARM
SITE PLAN - ELECTRICAL PHASE 1
SITE PLAN - HEAT TAPE PHASE 1
SITE PLAN - IT ELECTRICAL PHASE 1
SITE PLAN - LIGHTING PHASE 1
SITE PLAN - LIGHTING LV/LV CALC PHASE 1

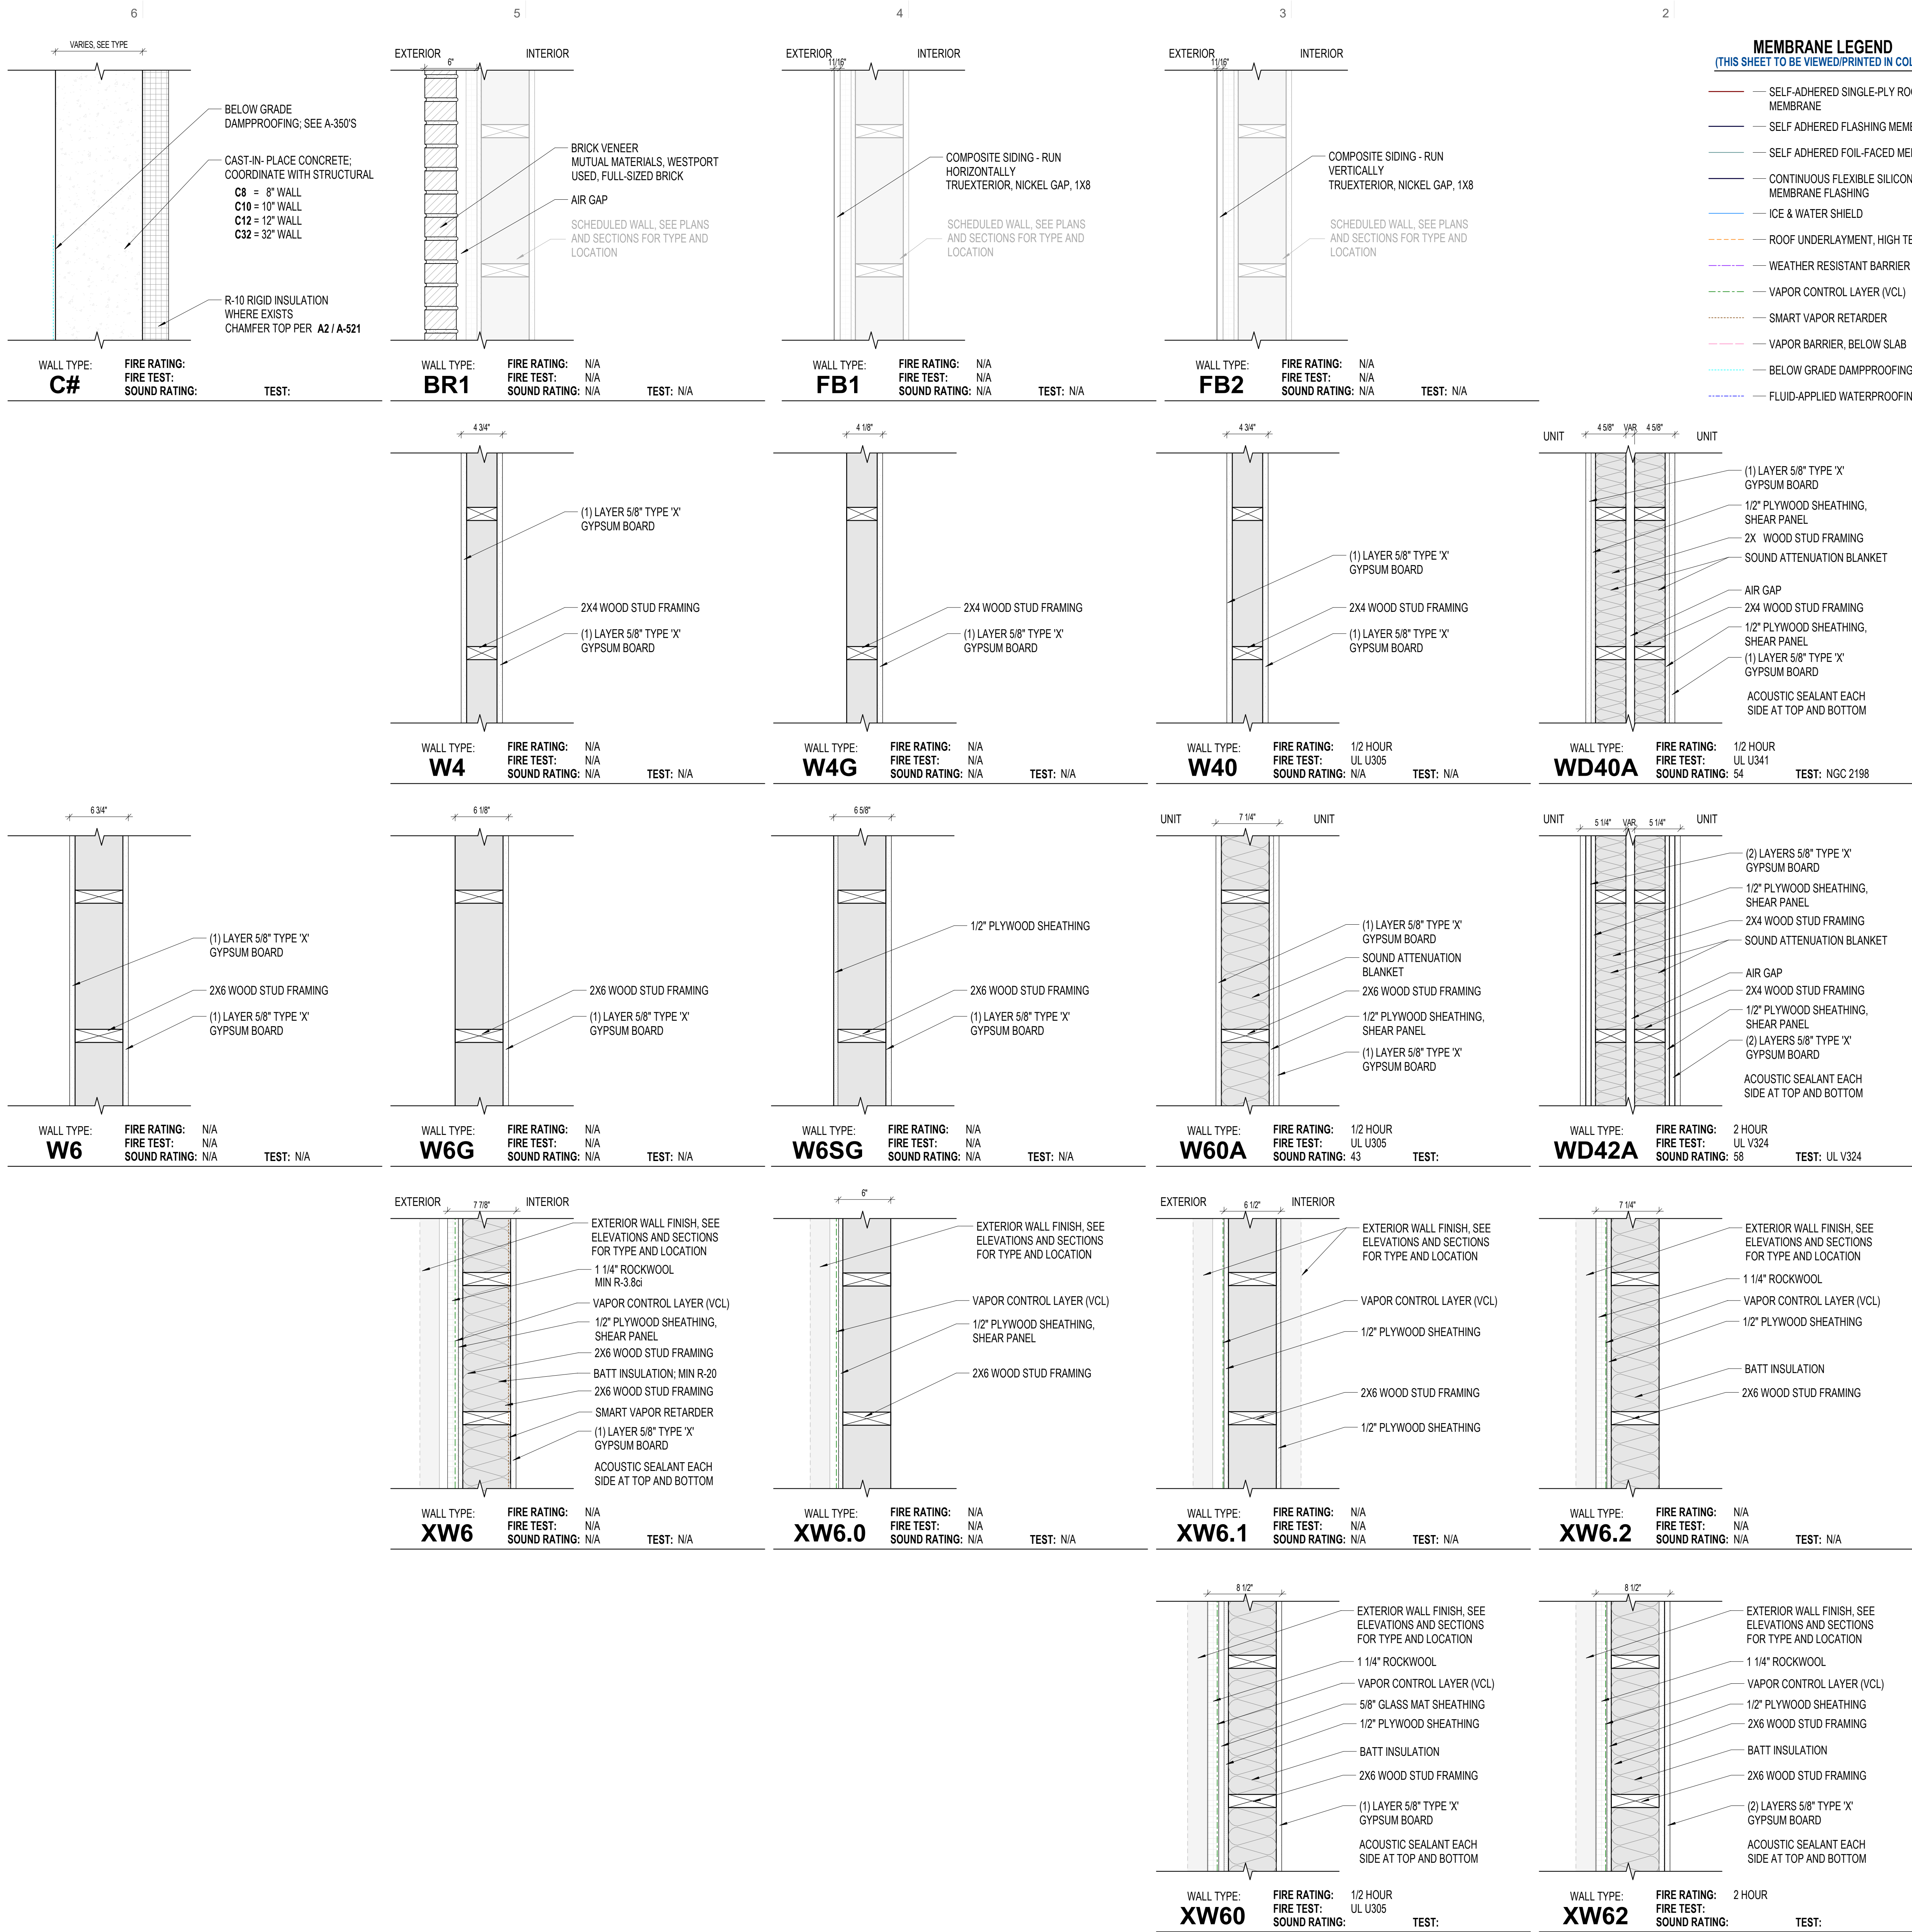

- 1
- GENERAL NOTES -**
- WALL TYPE ASSEMBLIES**
- A. **WALL HEIGHT:** ALL NEW INTERIOR WALL ASSEMBLIES ARE CONTINUOUS TO BOTTOM OF DECK UNLESS NOTED OTHERWISE. REFER TO THE LEGENDS ON THIS SHEET AND COORDINATE WITH PLANS.
- B. **TILE BACKER / CEMENT BOARD:** WALL TYPES DESCRIBED ON THIS SHEET DO NOT SHOW OR ACCOUNT FOR REQUIREMENTS WHERE A TILE FINISH OCCURS. WHERE THE FINISH SCHEDULE OR INTERIOR ELEVATIONS CALL FOR TILE, REPLACE GYPSUM BOARD SHOWN IN THAT WALL'S ASSEMBLY WITH TILE BACKER / CEMENT BOARD WHERE THE TILE OCCURS. REPLACE OTHER GYPSUM BOARD SHOWN IN THAT WALL'S ASSEMBLY WITH MOISTURE RESISTANT GYPSUM BOARD WHERE NO TILE OCCURS.
- C. **BACKING / SUPPORT:** WALL TYPES DESCRIBED ON THIS SHEET DO NOT ACCOUNT FOR REQUIRED BACKING. CONTRACTOR TO PROVIDE BACKING / SUPPORT FOR ALL MOUNTED FIXTURES, EQUIPMENT, CASEWORK, AND/OR SYSTEMS FURNITURE. COORDINATE WITH FLOOR PLANS, AND INTERIOR ELEVATIONS PRIOR TO THE COVERING OF STUD FRAMING. REFER TO MANUFACTURERS' RECOMMENDATIONS WHERE APPLICABLE, OTHERWISE REFER TO DETAILS ON A700s SHEET SERIES.
- D. **STRUCTURAL SHEATHING:** REFER TO STRUCTURAL DRAWINGS FOR STRUCTURAL SHEATHING REQUIREMENTS AND ATTACHMENTS.
- E. **SEISMIC BRACING:** PROVIDE SEISMIC BRACING AT ALL WALL TYPES THAT DO NOT EXTEND TO DECK, REFER TO DETAILS ON A700s SHEET SERIES.
- F. **PENETRATIONS:** PENETRATIONS THROUGH FIRE RATED ASSEMBLIES SHALL BE PROVIDED PER G550s SHEET SERIES.
- G. **LISTED ASSEMBLIES:** RATED ASSEMBLIES PROVIDED PER G550s SHEET SERIES.
- H. **ACOUSTIC WALLS:** AT ALL WALLS WITH SOUND ATTENUATION, SEAL ENTIRE TOP AND BOTTOM OF WALL WITH SOUND SEALANT.
- I. **DEFLECTION TRACK:** AT ALL WALLS THAT EXTEND TO STRUCTURE PROVIDE DEFLECTION TRACK. REFER TO DETAILS ON A700s SHEET SERIES.
- J. **RATED WALL PRIORITY:** FOR PARTITION PRIORITY FOR SEQUENCING OF RATED WALL CONSTRUCTION REFER TO DETAILS ON A700s SHEET SERIES.
- K. **INFORMATION IN THE LEGENDS BELOW IS FOR REFERENCE ONLY AND DOES NOT OVERRIDE THE CONTENTS OF THE DETAILS ON THIS SHEET.**
- L. **DO NOT SCALE DRAWINGS.**

EXTERIOR WALL TAG LEGEND

XS#1.1

PREFIX: 'X' FOR EXTERIOR CORE WALL
CONSTRUCTION TYPE (SEE BELOW)
STRUCTURE THICKNESS (TO NEAREST No.)
FIRE RATING (AS NEEDED, SEE BELOW)
TYPE (AS NEEDED)

CONSTRUCTION TYPES		FIRE RATING	
CONCRETE	C	1 HOUR	1
MASONRY	M	2 HOUR	2
STEEL STUDS	S	3 HOUR	3
C-H (SHAFTWALL) STUD	H	4 HOUR	4
WOOD STUDS	W	NO RATING	NOT SHOWN

INTERIOR WALL TAG LEGEND

W61M(C)

CONSTRUCTION TYPE (SEE BELOW)
STRUCTURE THICKNESS (TO NEAREST No.)
FIRE RATING (AS NEEDED, SEE BELOW)
MODIFIERS (AS NEEDED, SEE BELOW)
TOP OF WALL CONDITION MODIFIER (SEE BELOW)

CONSTRUCTION TYPES		FIRE RATING	
CONCRETE	C	0 HOUR (SMOKE)	0
MASONRY	M	1 HOUR	1
STEEL STUDS	S	2 HOUR	2
C-H (SHAFTWALL) STUD	H	3 HOUR	3
WOOD STUDS	W	4 HOUR	4
DOUBLE STUD	#D	NO RATING	NOT SHOWN

MODIFIER EXAMPLES

MODIFIER EXAMPLES		TOP OF WALL CONDITIONS
ACOUSTIC RATING	A	SEE TABLE BELOW
FURRING	F	
GYP. ONE SIDE	G	
WOOD SHEATHING	S	

TOP OF WALL MODIFIERS
DETAILS PROVIDED PER A700s SHEET SERIES.

EXAMPLE

(U) = **UNDERSIDE / BOTTOM OF CEILING**
WALL EXTENDS TO UNDERSIDE OF CEILING. TERMINATE WITH "J" MOULD AT GYP. BOARD WALLS.

(C) = **6" ABOVE CEILING**
WALLS WILL TERMINATE AT 6" ABOVE THE HIGHEST ADJOINING CEILING (UNLESS OTHERWISE NOTED) OR 1 FULL COURSE ABOVE FOR MASONRY WALLS.

(H) = **PARTIAL HEIGHT**
REFER TO DRAWINGS FOR TOP OF WALL ELEVATION

(N) = **NO SUBSTRATES TO STRUCTURE**
SUBSTRATE BOARDS WILL TERMINATE AT 6" ABOVE ADJOINING CEILING (UNLESS OTHERWISE NOTED) OR 1 FULL COURSE ABOVE FOR MASONRY WALLS.

(S) = **ONE SUBSTRATE TO STRUCTURE**
SUBSTRATE BOARD WILL TERMINATE TO BOTTOM OF DECK ON ONE SIDE AND THE OTHER SIDE SHALL TERMINATE AT 6" ABOVE ADJOINING CEILING (UNLESS OTHERWISE NOTED). TERMINATE 1 FULL COURSE ABOVE FOR MASONRY WALLS.

AGENCY APPROVAL

ARCH | NEXUS

Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

07-17-26


STATE OF UTAH
STEPHEN M. SPRINGER
No. 7655609-0301
LICENSED ARCHITECT

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

VERTICAL ASSEMBLY TYPES

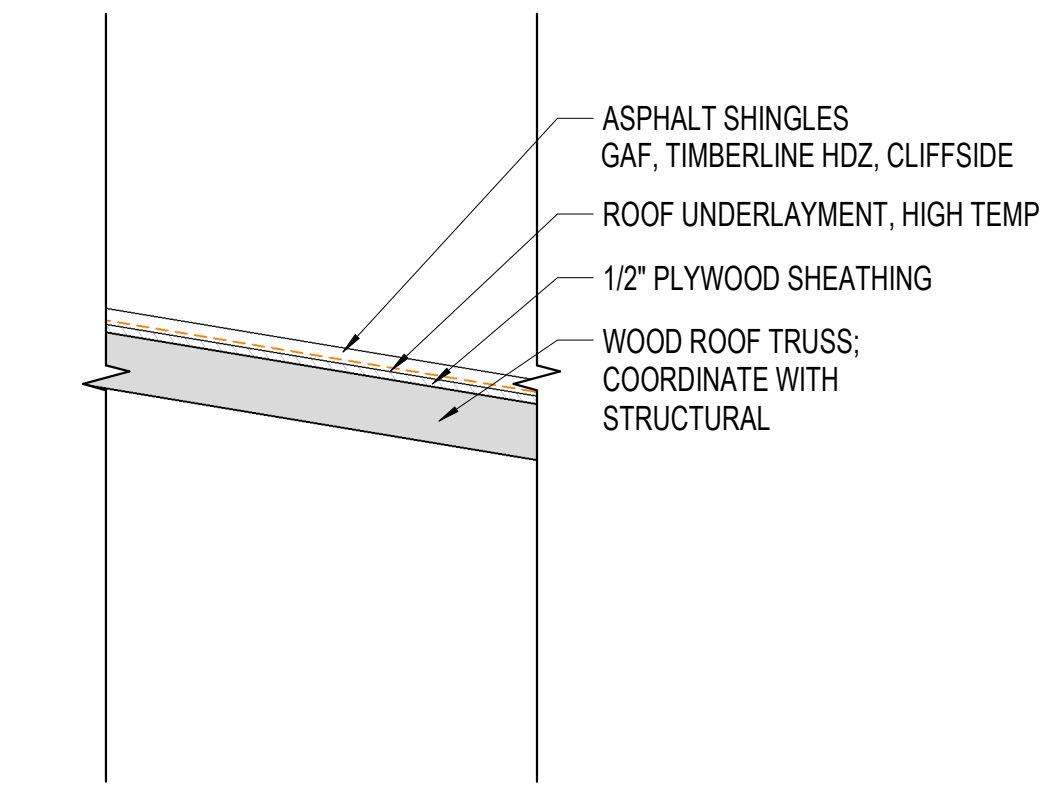

ROOF TYPE: **RW4**
FIRE RATING: N/A
SOUND RATING: N/A
TEST: N/A

- MEMBRANE LEGEND**
(THIS SHEET TO BE VIEWED/PRINTED IN COLOR)
- SELF-ADHERED SINGLE-PLY ROOFING MEMBRANE
 - SELF ADHERED FLASHING MEMBRANE
 - SELF ADHERED FOIL-FACED MEMBRANE
 - CONTINUOUS FLEXIBLE SILICONE MEMBRANE FLASHING
 - ICE & WATER SHIELD
 - ROOF UNDERLAYMENT, HIGH TEMP
 - WEATHER RESISTANT BARRIER (WRB)
 - VAPOR CONTROL LAYER (VCL)
 - SMART VAPOR RETARDER
 - VAPOR BARRIER, BELOW SLAB
 - BELOW GRADE DAMPPROOFING
 - FLUID-APPLIED WATERPROOFING

- GENERAL NOTES - HORIZONTAL ASSEMBLIES**
- REFER TO STRUCTURAL DRAWINGS FOR STRUCTURAL DECKING REQUIREMENTS AND ATTACHMENTS.
 - PROVIDE SEISMIC BRACING AT WALL TYPES THAT DO NOT EXTEND TO DECK. REFER TO DETAILS ON A700s SHEET SERIES.
 - PENETRATIONS THROUGH FIRE RATED ASSEMBLIES SHALL BE PROVIDED PER DETAILS ON G550s SHEET SERIES.
 - INFORMATION SUPPLIED ON THIS SHEET IS SUPPLIED AS A BASE CASE AND IS SUPERCEDED BY LOCATION SPECIFIC DETAIL DRAWINGS.
 - REFER TO TYPICAL DETAILS ON A700s SHEET SERIES FOR HORIZONTAL AND VERTICAL CONNECTIONS.
 - ALL FIRE RATED ASSEMBLIES TO BE CONTINUOUS; FIRE CAULK AND/OR FIRE SAFING TO BE PROVIDED AT ALL ASSEMBLY TERMINATIONS.
 - ALL ACOUSTICALLY RATED ASSEMBLIES TO BE CONTINUOUS; ACOUSTIC CAULK TO BE PROVIDED AT ASSEMBLY TERMINATIONS OR PENETRATIONS.
 - LIGHT FIXTURES IN CEILINGS TO RECEIVE BATT INSULATION ON TOP SHALL HAVE A BOX OUT TO PROTECT THE INSULATION FROM THE HEAT OF THE LIGHT SOURCE PER DETAIL.
 - ALL EXPOSED INTERIOR CONCRETE IS TO BE SEALED UNLESS NOTED OTHERWISE.
 - INFORMATION IN THE LEGEND BELOW IS FOR REFERENCE ONLY AND DOES NOT OVERRIDE THE CONTENTS OF THE DETAILS ON THIS SHEET.
 - DO NOT SCALE DRAWINGS.

ROOF TAG LEGEND

RC#1.1

PREFIX: 'R' FOR ROOF
CONSTRUCTION TYPE (SEE BELOW)
STRUCTURE THICKNESS (TO NEAREST No.)
FIRE RATING (AS NEEDED, SEE BELOW)
TYPE (AS NEEDED)

CONSTRUCTION TYPES		FIRE RATING	
COMPOSITE CONC.	C	1 HOUR	1
STEEL DECK	S	2 HOUR	2
WOOD JOIST / TRUSS	W	3 HOUR	3
POST-TENSIONED CONC.	P	4 HOUR	4
CONC. WAFFLE SLAB	F	NO RATING	NOT SHOWN

CEILING TAG LEGEND

CS#1.11
XCS#1.11

PREFIX: 'X' FOR EXTERIOR (AS NEEDED)
PREFIX: 'C' FOR CEILING
CONSTRUCTION TYPE (SEE BELOW)
STRUCTURE THICKNESS (TO NEAREST No.)
FIRE RATING (AS NEEDED, SEE BELOW)
FINISH INDICATOR (SEE BELOW)
TYPE (AS NEEDED)

CONSTRUCTION TYPES		FIRE RATING	
CONCRETE	C	1 HOUR	1
STEEL FRAMING	S	2 HOUR	2
SUSPENDED TRACK	T	3 HOUR	3
C-H (SHAFTWALL) STUD	H	4 HOUR	4
WOOD FRAMING	W	NO RATING	NOT SHOWN
FINISH	F		

INTERIOR FINISH TYPES		EXTERIOR FINISH TYPES	
GYPSUM BOARD	.1	METAL PANEL	.6
ACT	.3	PROFILED METAL PANEL	.7
WOOD	.5	EIFS	.9

FLOOR TAG LEGEND

FC#2.1

PREFIX: 'F' FOR FLOOR
CONSTRUCTION TYPE (SEE BELOW)
STRUCTURE THICKNESS (TO NEAREST No.)
FIRE RATING (AS NEEDED, SEE BELOW)
TYPE (AS NEEDED)

CONSTRUCTION TYPES		FIRE RATING	
CONCRETE	C	1 HOUR	1
CONCRETE, S.O.G	G	2 HOUR	2
CONCRETE PAD	P	3 HOUR	3
STEEL JOIST / TRUSS	S	4 HOUR	4
WOOD JOIST / TRUSS	W	NO RATING	NOT SHOWN
METAL DECK W/ SUBSTRATE	D		

AGENCY APPROVAL

Date Revision


BP3 - 100% CD SET


NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

HORIZONTAL ASSEMBLY TYPES

G-511

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

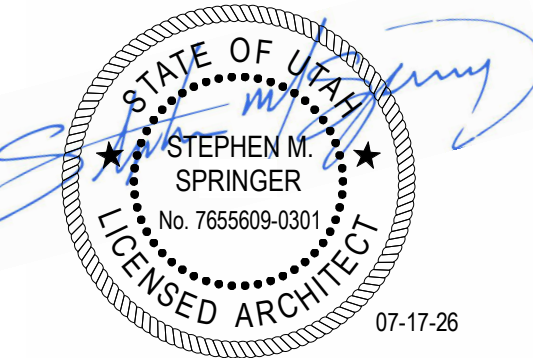

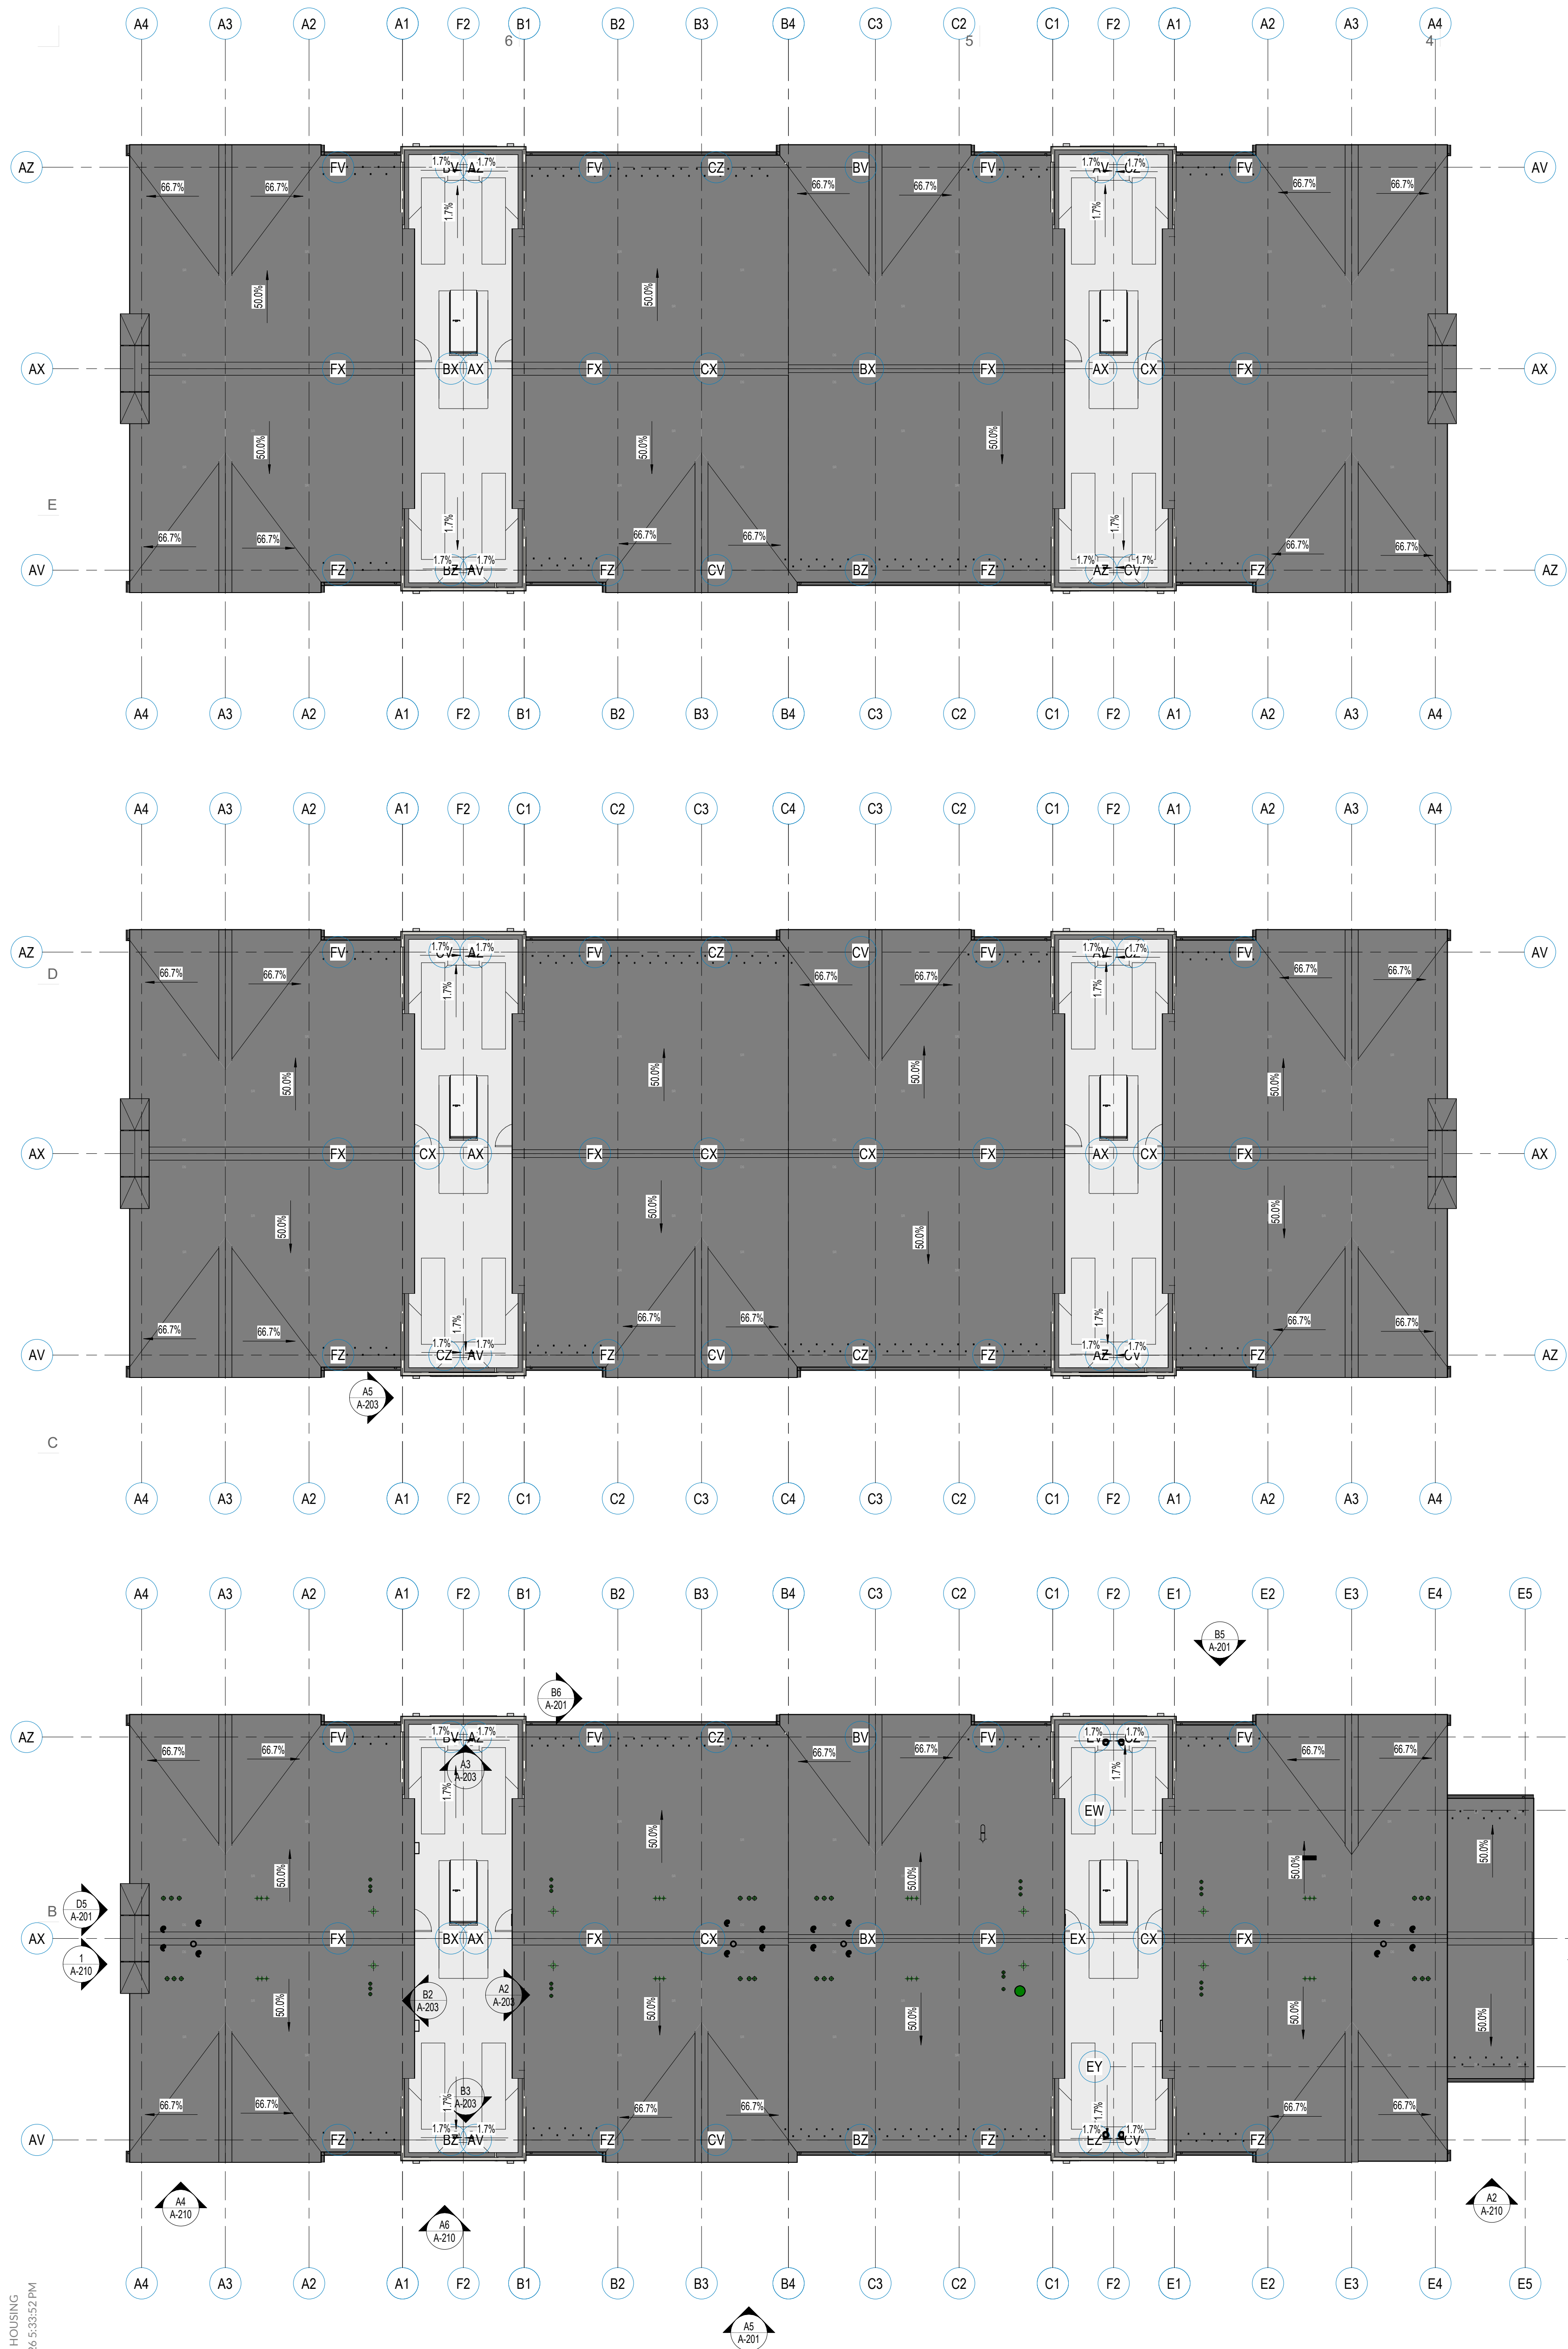

3

2


1

GENERAL NOTES - ROOF PLANS


- COORDINATE ALL PENETRATIONS OF ROOF SYSTEM WITH MECHANICAL AND ELECTRICAL DRAWINGS.
- COORDINATE ALL EQUIPMENT LOCATIONS WITH MECHANICAL AND ELECTRICAL DRAWINGS.
- PROVIDE ROOF PROTECTION TO ALL ROOF TOP EQUIPMENT.
- PROVIDE BUILT-UP TAPERED INSULATION ROOF CRICKETS AT ALL LOCATIONS OF CURBS, ROOFTOP EQUIPMENT, ETC. TO ALLOW POSITIVE DRAINAGE AND PREVENT PONDING.
- TAPERED INSULATION SLOPE TO BE 1/4" PER FOOT MINIMUM. SLOPE AS INDICATED ON PLANS.
- WHERE ROOF TO VERTICAL WALL INTERSECTIONS OCCUR, RUN MEMBRANE MINIMUM 8" UP WALL. REFER TO DETAILS FOR TERMINATION.
- ROOF MEMBRANE TO BE 80 MIL MINIMUM THICKNESS UNLESS NOTED OTHERWISE.
- SLOPE ALL CRICKETS AS SHOWN AT A MINIMUM OF 1/4" PER FOOT, UNLESS NOTED OTHERWISE.
- DO NOT SCALE DRAWINGS.



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

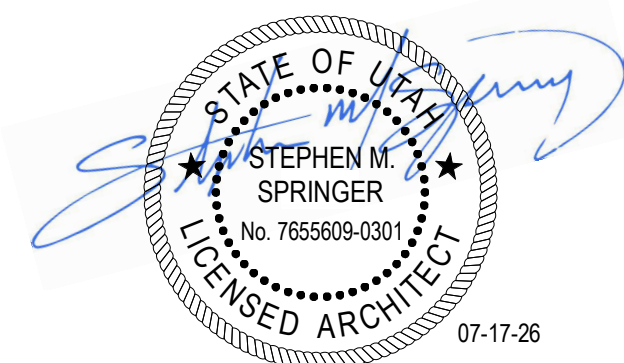

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

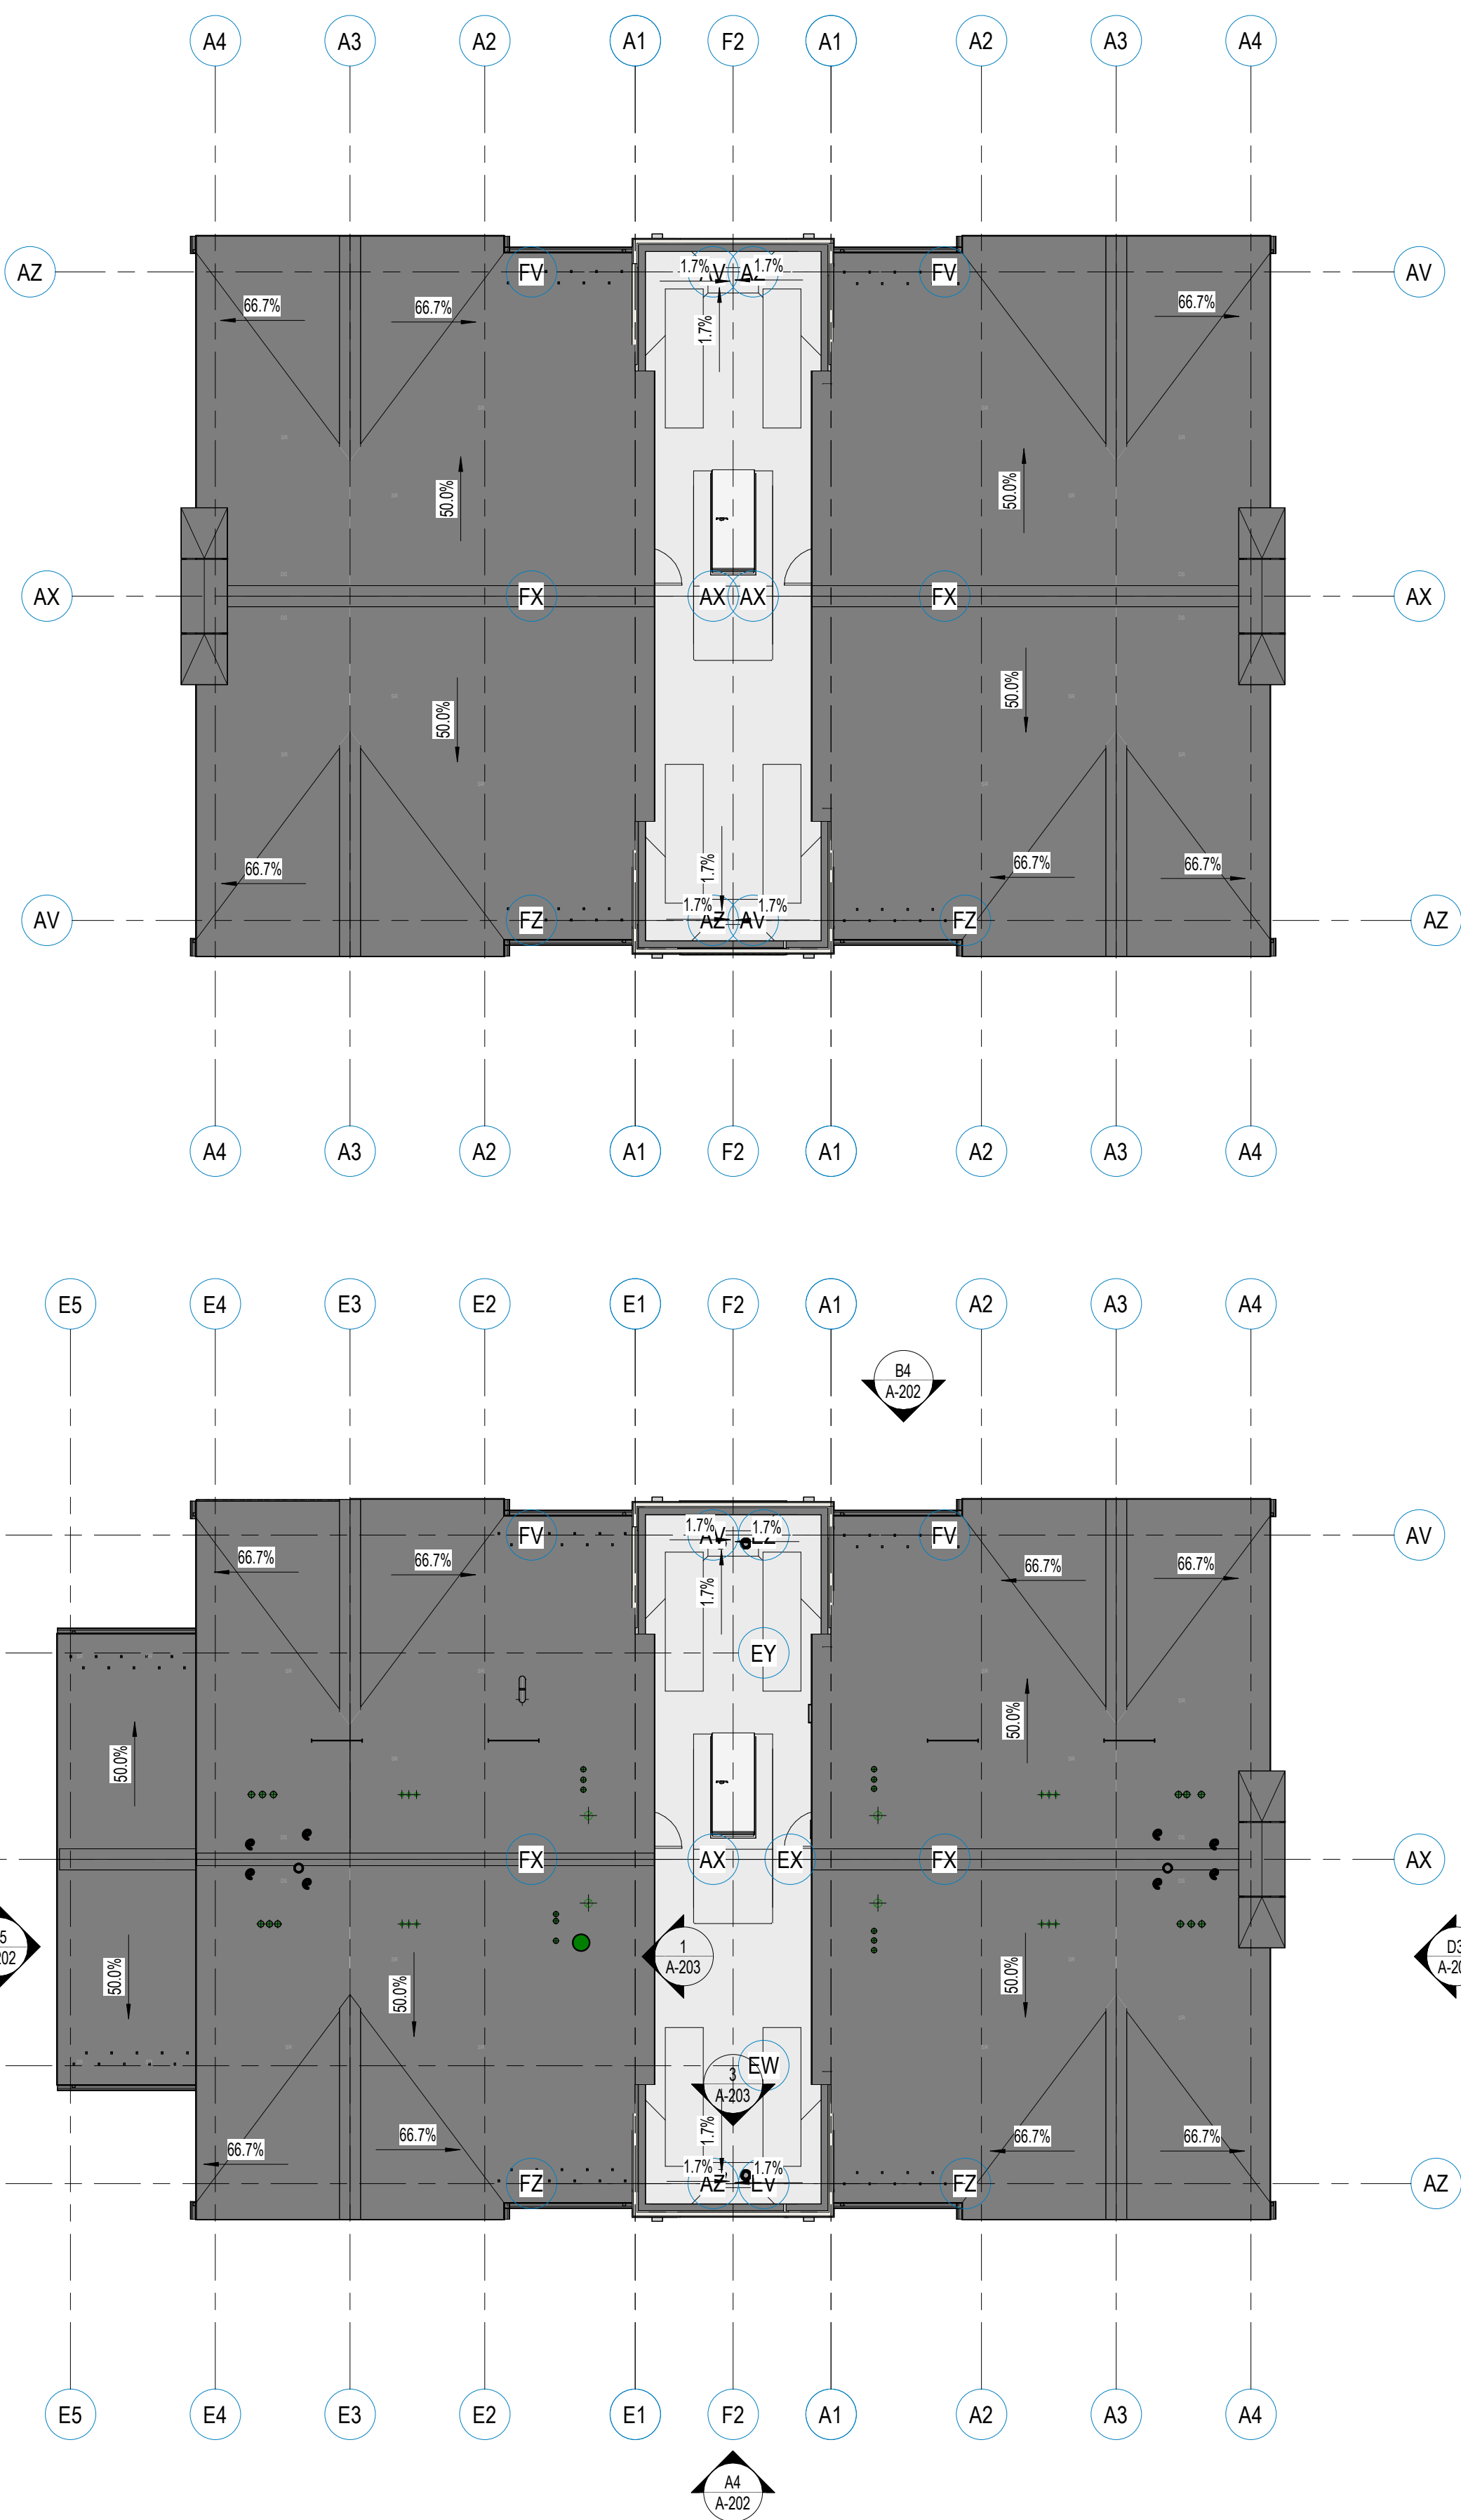


Date Revision

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

BLDG TYPES - ROOF PLAN

A-005

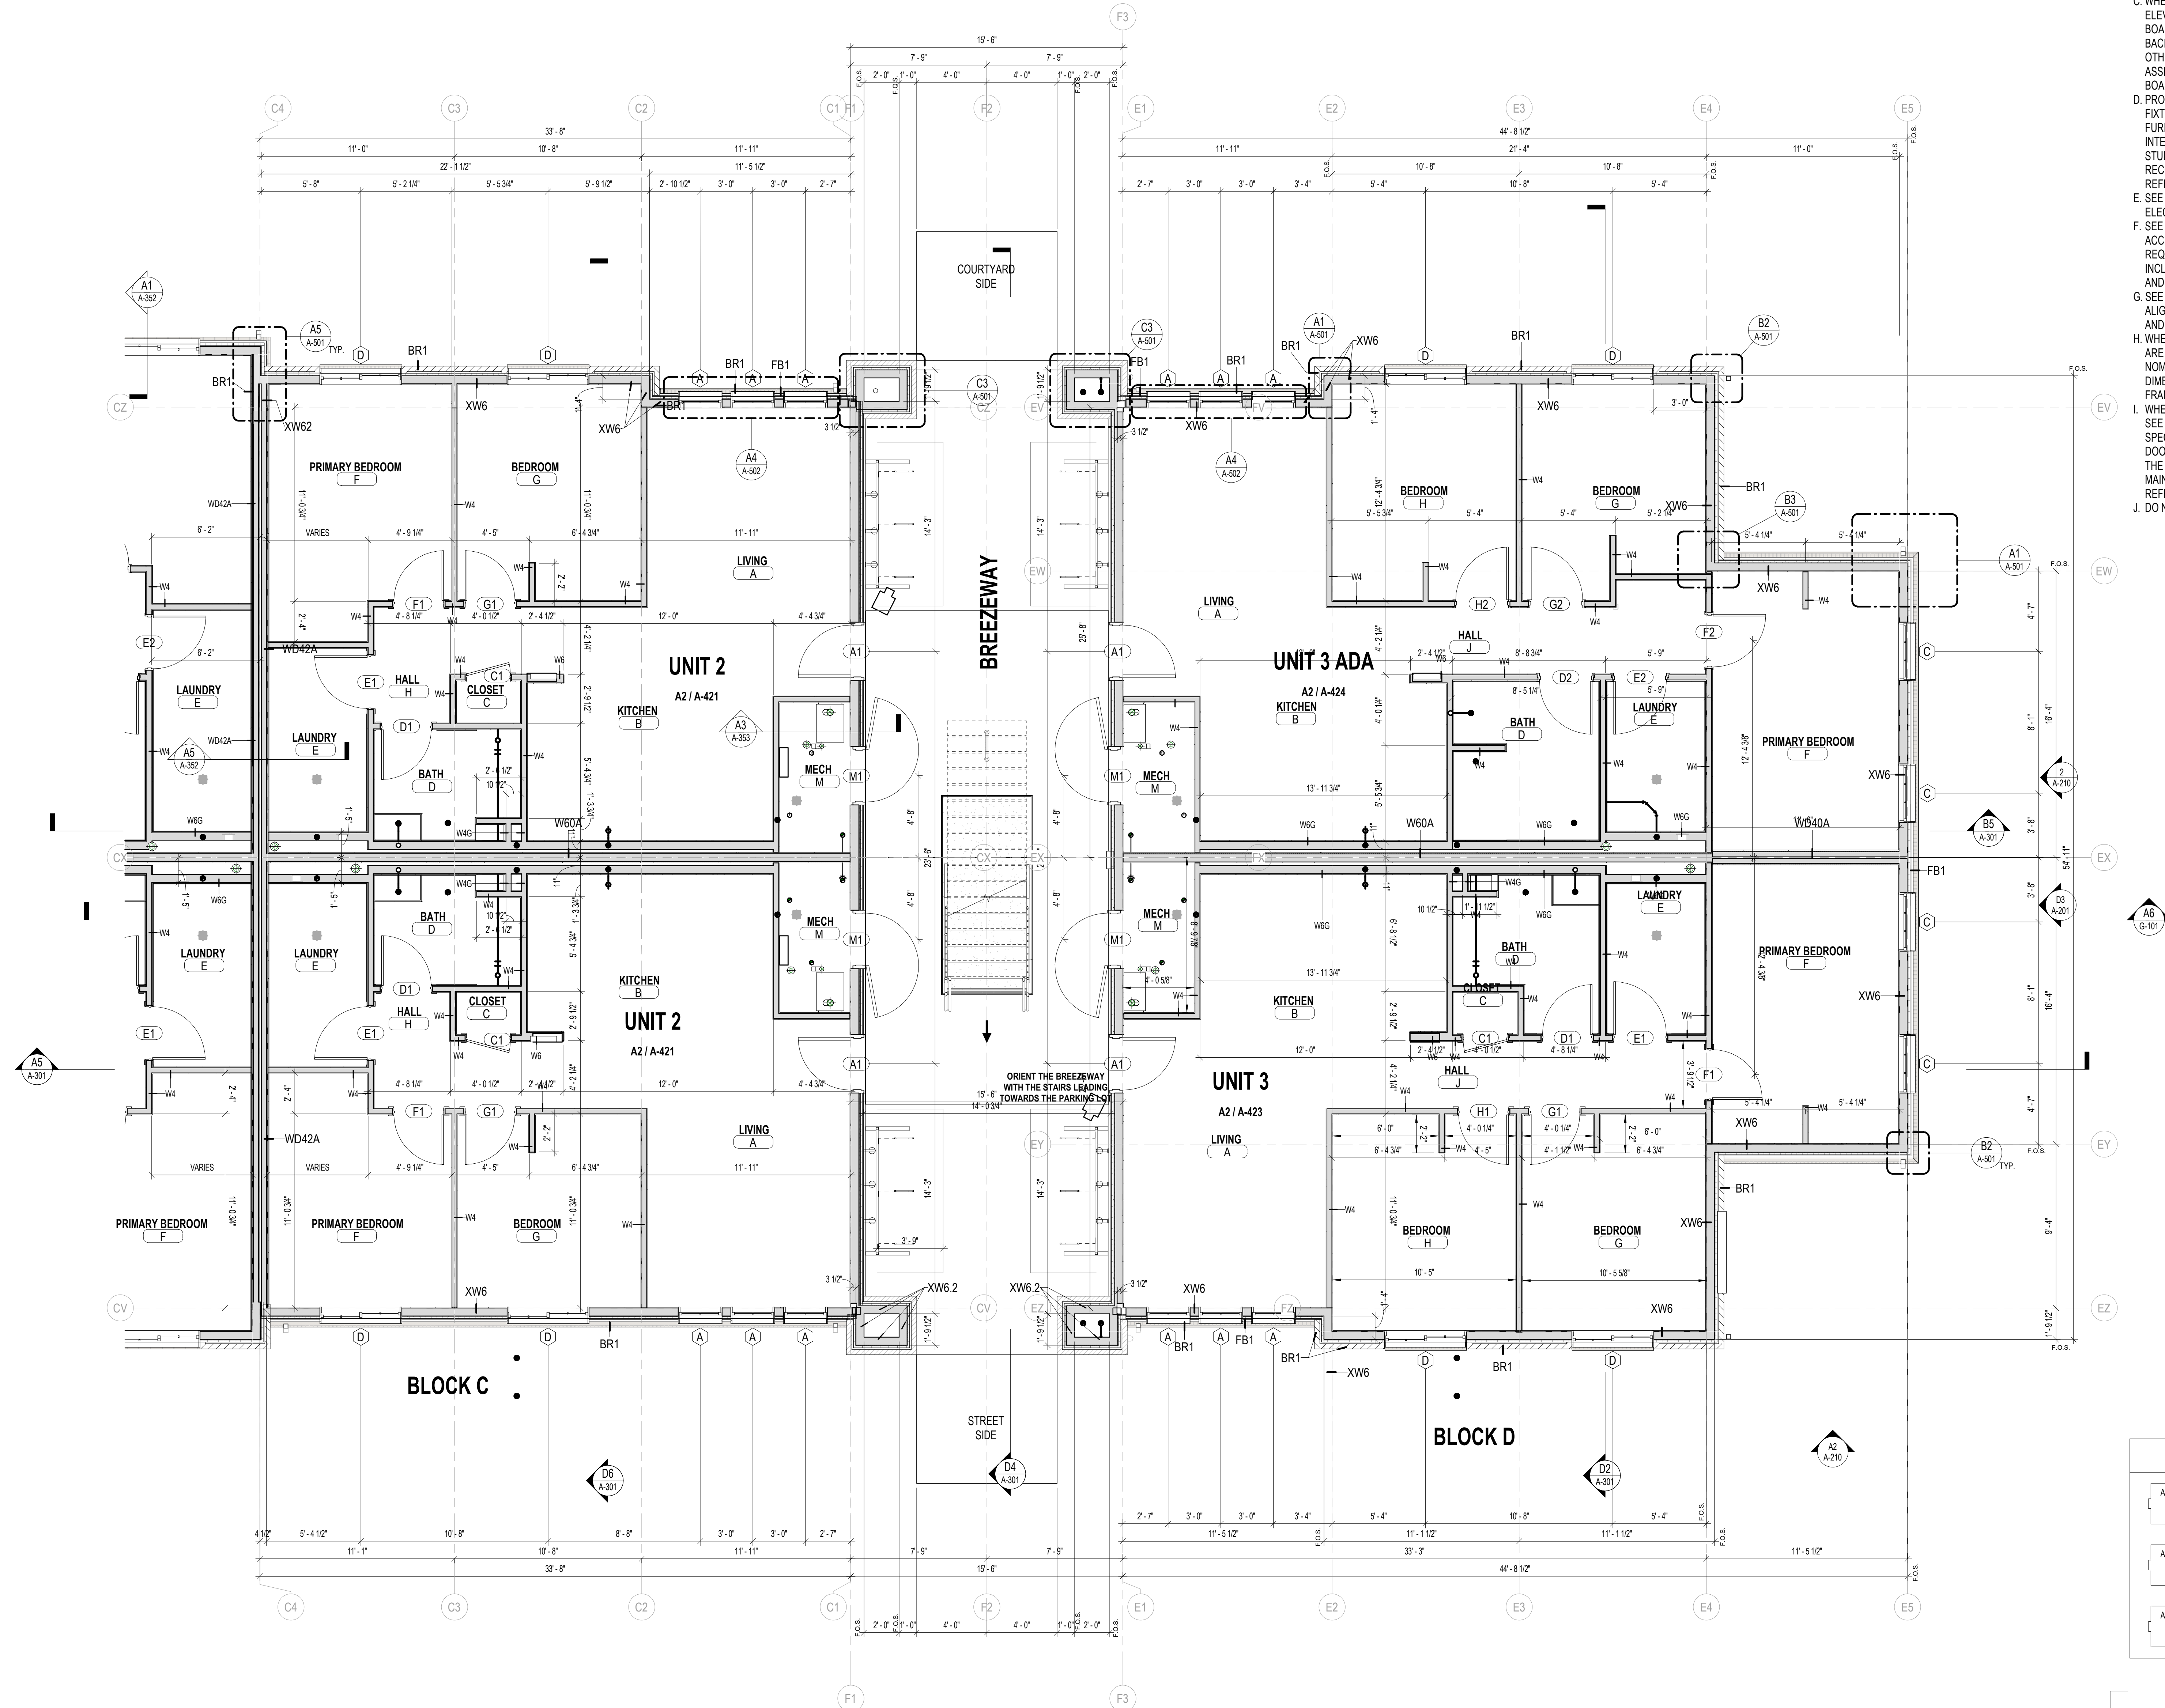


GENERAL NOTES - FLOOR PLANS


- A. ALL NEW WALL ASSEMBLIES ARE CONTINUOUS TO BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- B. PLAN WALL DIMENSIONS ARE TO GRID LINE OR FACE OF WALL STRUCTURE, UNLESS NOTED OTHERWISE. "CLEAR" DIMENSIONS ARE TO FACE OF WALL FINISH.
- C. WHERE THE FINISH SCHEDULE OR INTERIOR ELEVATIONS CALL FOR TILE, REPLACE GYPSUM BOARD SHOWN IN THE WALL'S ASSEMBLY WITH TILE BACKER BOARD WHERE TILE OCCURS. REPLACE OTHER GYPSUM BOARD SHOWN IN THAT WALL'S ASSEMBLY WITH MOISTURE RESISTANT GYPSUM BOARD WHERE NO TILE OCCURS.
- D. PROVIDE BACKING / SUPPORT FOR ALL MOUNTED FIXTURES, EQUIPMENT, CASEWORK, AND/OR SYSTEMS FURNITURE. COORDINATE WITH FLOOR PLANS, AND INTERIOR ELEVATIONS PRIOR TO THE COVERING OF STUD FRAMING. REFER TO MANUFACTURER'S RECOMMENDATIONS WHERE APPLICABLE. OTHERWISE REFER TO DETAILS ON A700s SHEET SERIES.
- E. SEE CIVIL, STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR MORE INFORMATION.
- F. SEE G SERIES SHEETS FOR WALL TYPES AND TYPICAL ACCESSIBILITY CLEARANCE AND COMPLIANCE REQUIREMENTS, REGULATORY PLAN INFORMATION, INCLUDING RATED ASSEMBLY EXTENTS, OCCUPANCY AND EGRESS SYSTEMS.
- G. SEE A100s SERIES DIMENSIONAL CONTROL PLANS FOR ALIGNMENT / POSITION OF STRUCTURAL ELEMENTS AND OTHER KEY DIMENSIONS.
- H. WHERE PROVIDED, DOOR AND WINDOW DIMENSIONS ARE TO EDGE OF OPENING. OPENING DIMENSIONS ARE NOMINAL. CONTRACTOR SHALL COORDINATE DIMENSIONS OF ALL ROUGH OPENINGS AND ACTUAL FRAME SIZES.
- I. WHERE DOOR LOCATIONS ARE NOT DIMENSIONED, SEE DETAILS REFERENCED IN DOOR SCHEDULE BY SPECIFIC CONDITION. OTHERWISE, THE HINGE SIDE DOOR ROUGH OPENINGS SHALL BE LOCATED 4" FROM THE ADJACENT PERPENDICULAR WALL, SUBJECT TO MAINTENANCE OF REQUIRED ADA CLEARANCES REFERENCED IN THE G700s SHEET SERIES.
- J. DO NOT SCALE DRAWINGS.



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

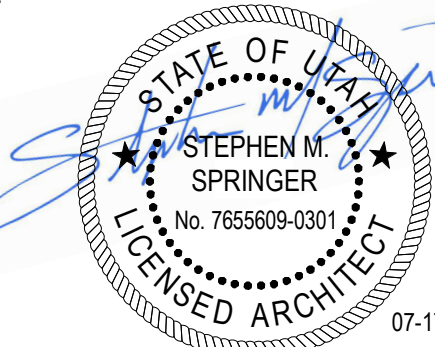

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

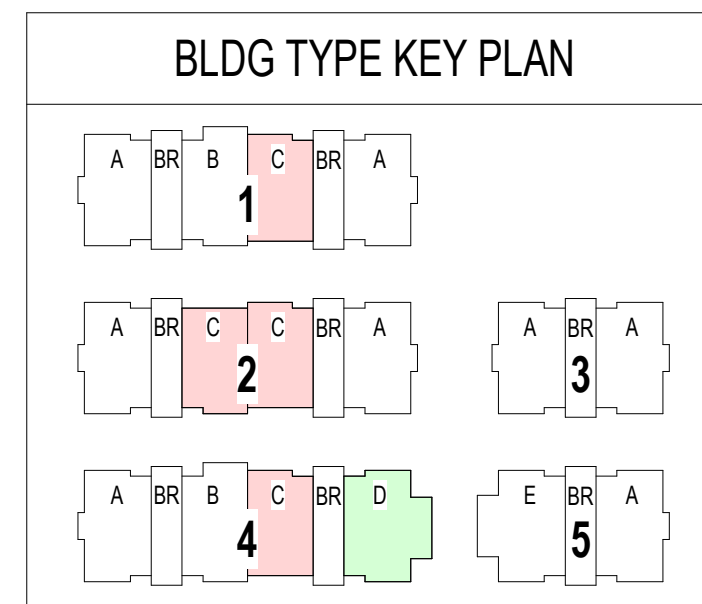


BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

LEVEL 01
FLOOR PLAN -
BLOCKS C & D

A-101CD

MODEL: HOUSING
7/20/2026 6:40:54 PM
A

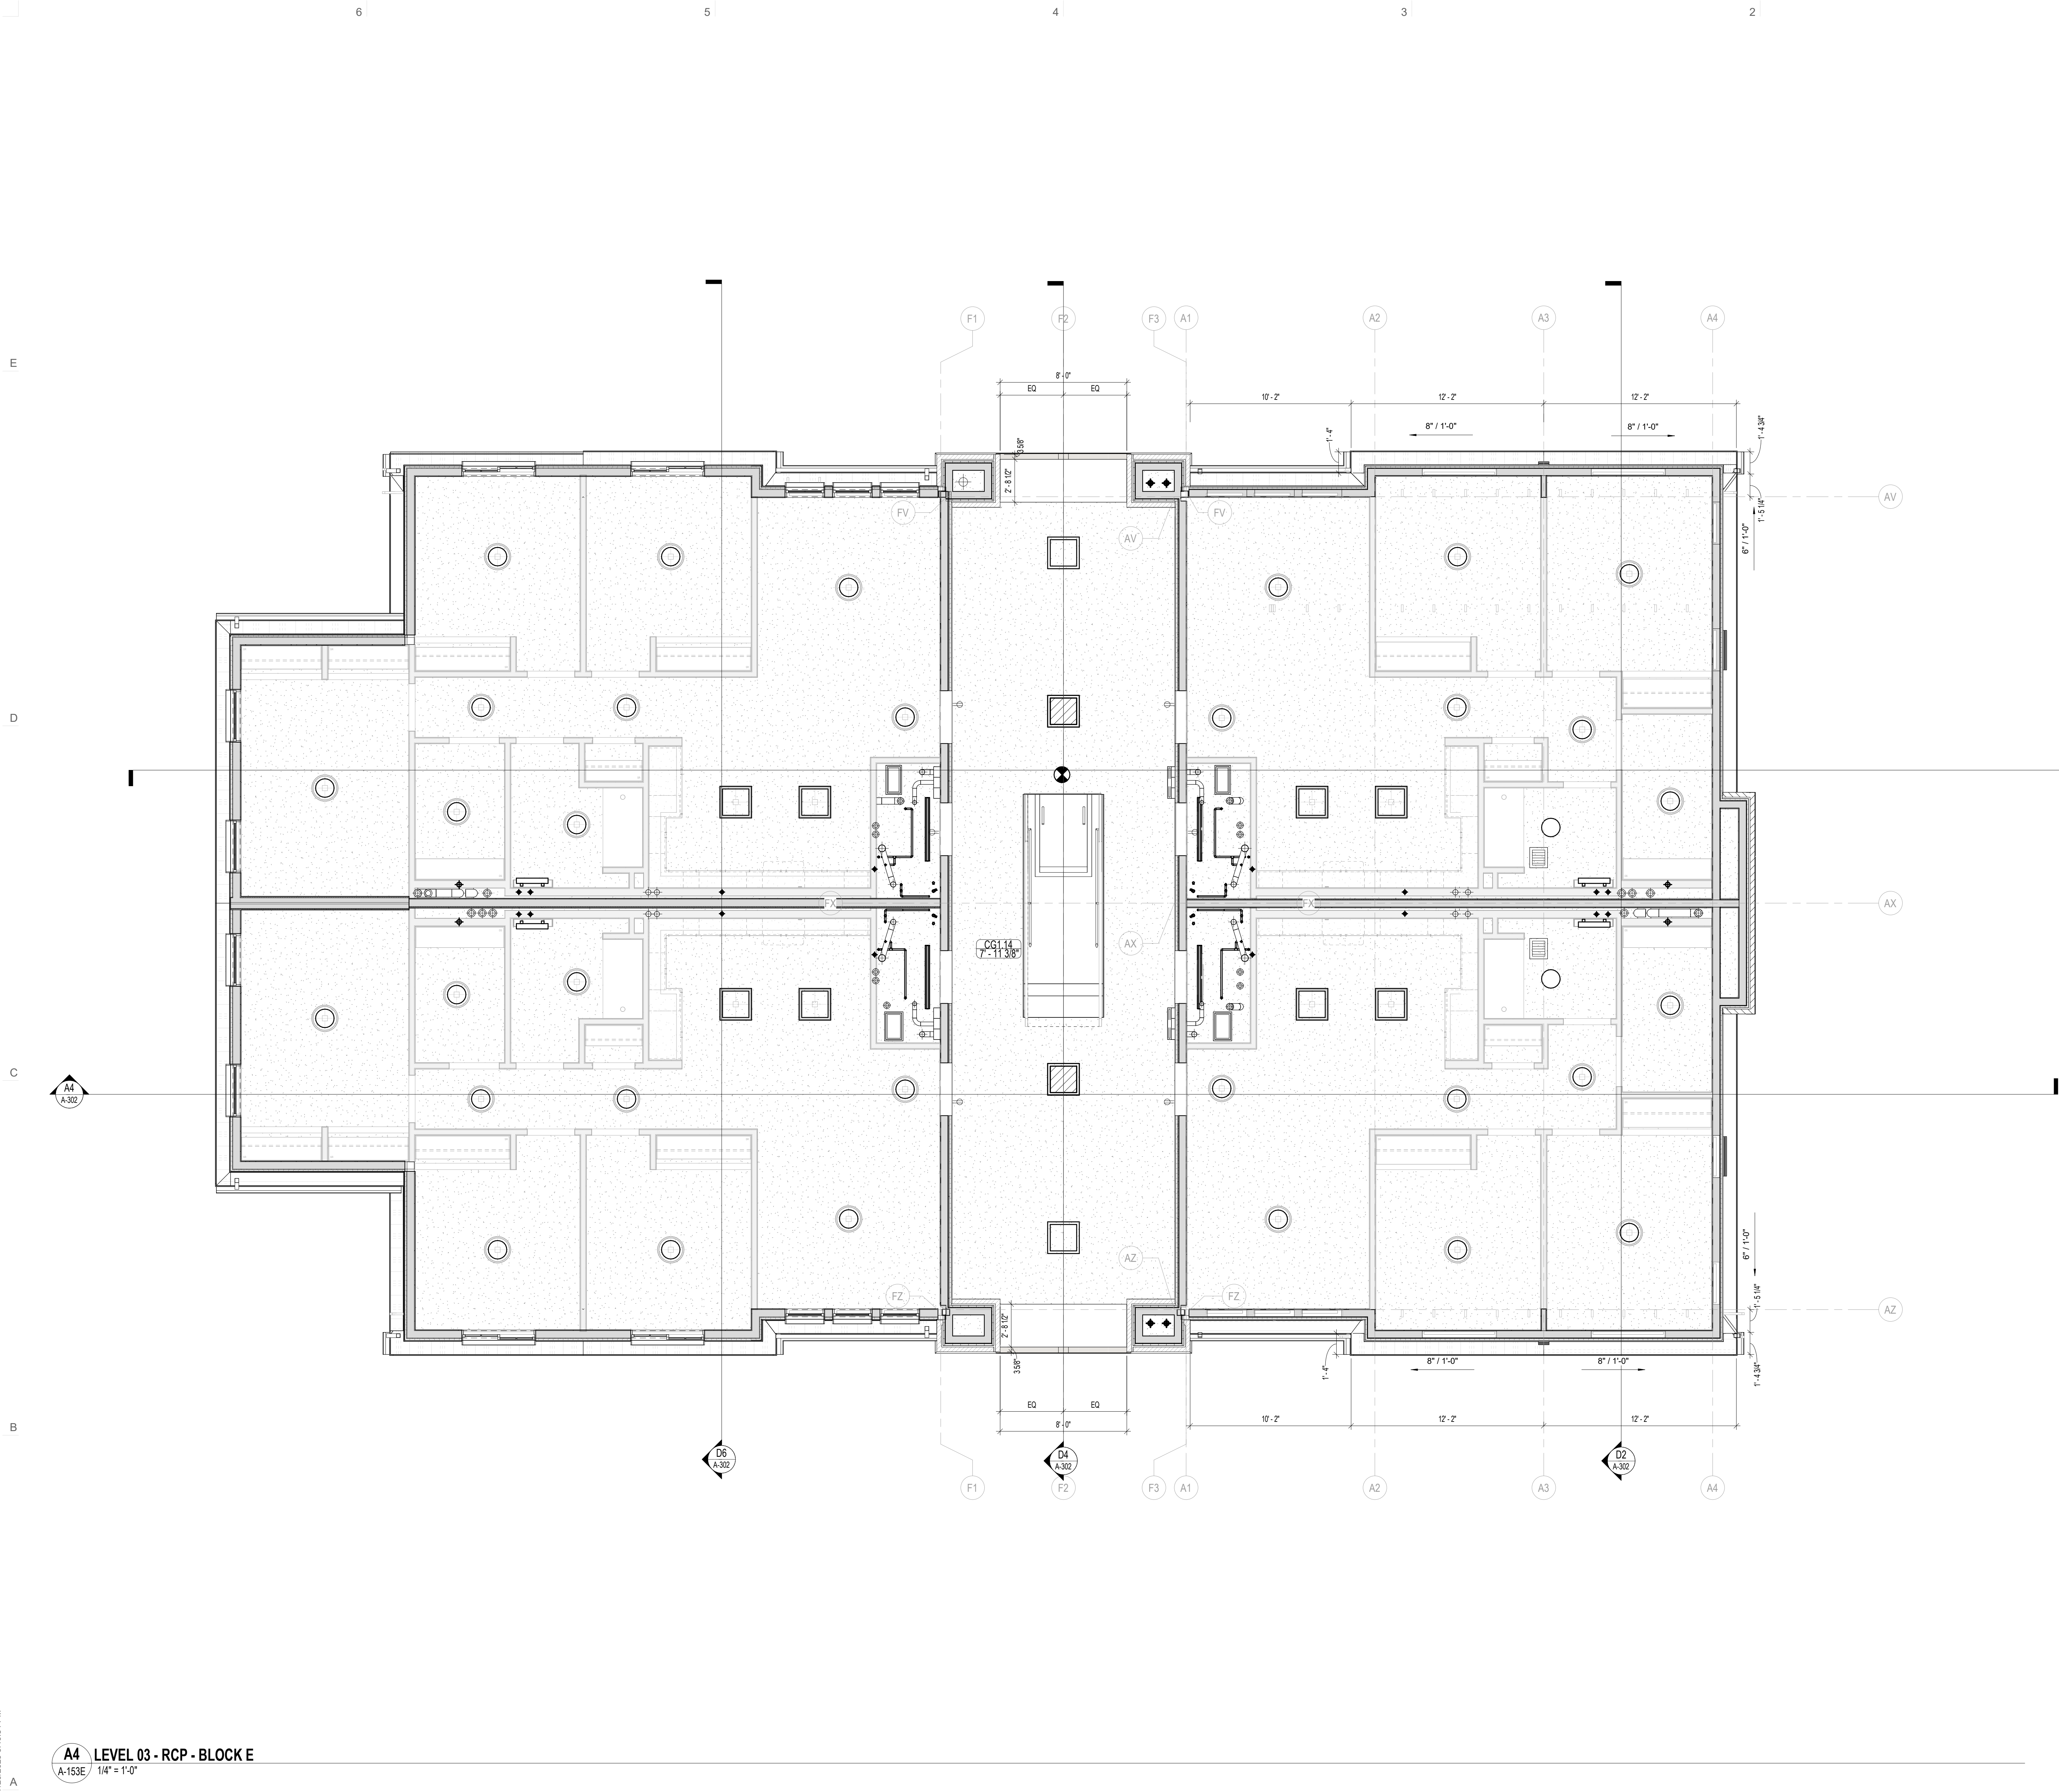

1

**GENERAL NOTES -
REFLECTED CEILING PLANS**

A. SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION REGARDING CEILING FIXTURES.

B. THE CEILING HEIGHT SHOWN IN THE ROOM TAG INDICATES THE HEIGHT OF THE DOMINANT CEILING FINISH. SEE ADDITIONAL CEILING FINISH CALLOUTS FOR OTHER CEILING HEIGHTS OR FEATURES.

C. THE CONTRACTOR SHALL COORDINATE ALL TRADES TO ENSURE THAT DESIGNATED CEILING HEIGHTS CAN BE ACHIEVED. NOTIFY ARCHITECT OF ANY CONFLICTS OR CONDITIONS THAT PREVENT THIS FROM OCCURRING BEFORE PROCEEDING WITH THE WORK.

D. PROVIDE REQUIRED BLOCKING AND SUPPORT FOR CEILING FANS AND ALL OTHER CEILING MOUNTED FIXTURES.

E. PROVIDE APPROPRIATE TRIM OR ESCUTCHEONS FOR ALL ITEMS PENETRATING CEILINGS FROM FINISH SPACE.

F. LIGHT FIXTURES IN CEILINGS TO RECEIVE BATT INSULATION ON TOP SHALL HAVE A BOX OUT TO PROTECT THE INSULATION FROM THE HEAT OF THE LIGHT SOURCE.

G. ALL SOFFIT DIMENSIONS ARE TO FACE OF FINISH MATERIAL.

H. SEE G SERIES SHEETS FOR EXPANSION JOINT SCHEDULE.

I. FOR TYPICAL CEILING AND SEISMIC BRACING DETAILS, REFER TO A700s SHEET SERIES.

J. DO NOT SCALE DRAWINGS.

ARCH | NEXUS

Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

STATE OF UTAH
STEPHEN N. SPRINGER
No. 7655609-0301
LICENSED ARCHITECT
07-17-26

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING

WYMOUNT TERRACE
PROVO, UT 84604

Date Revision

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

AGENCY APPROVAL


LEVEL 03 RCP -
BLOCK E

A-153E


A4 LEVEL 03 - RCP - BLOCK E
A-153E / 1/4" = 1'-0"

MODEL: HOUSING
7/20/2026 4:33:33 PM


E
D
C
B
A

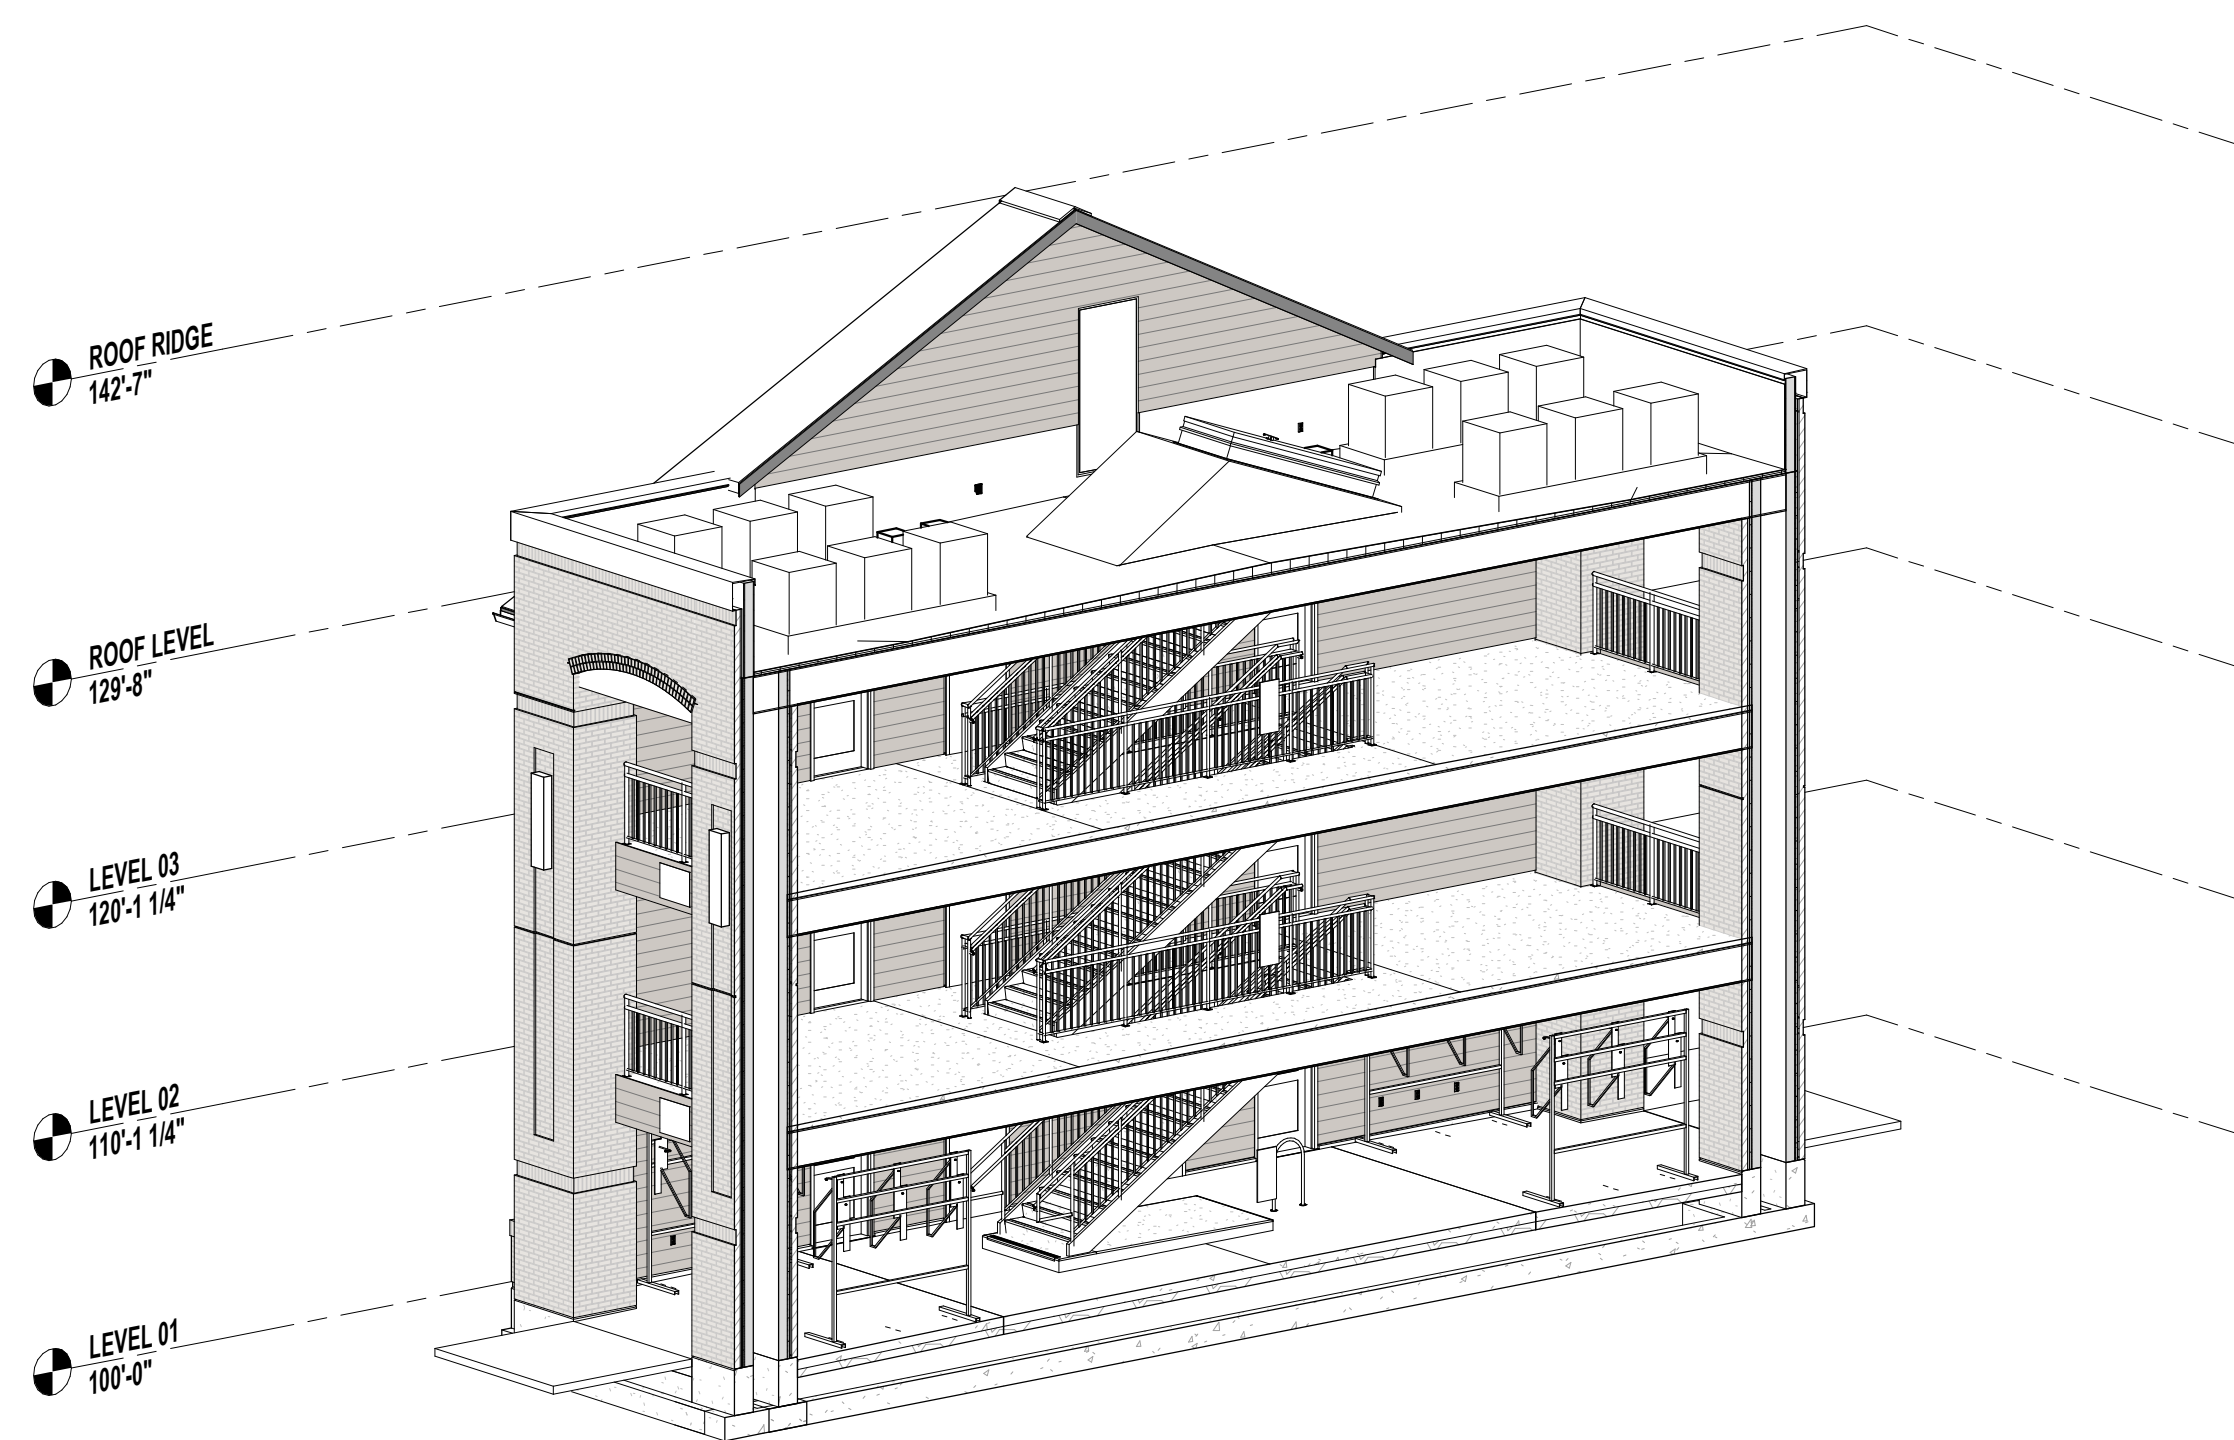


B5 3D - BREEZEWAY
A-203

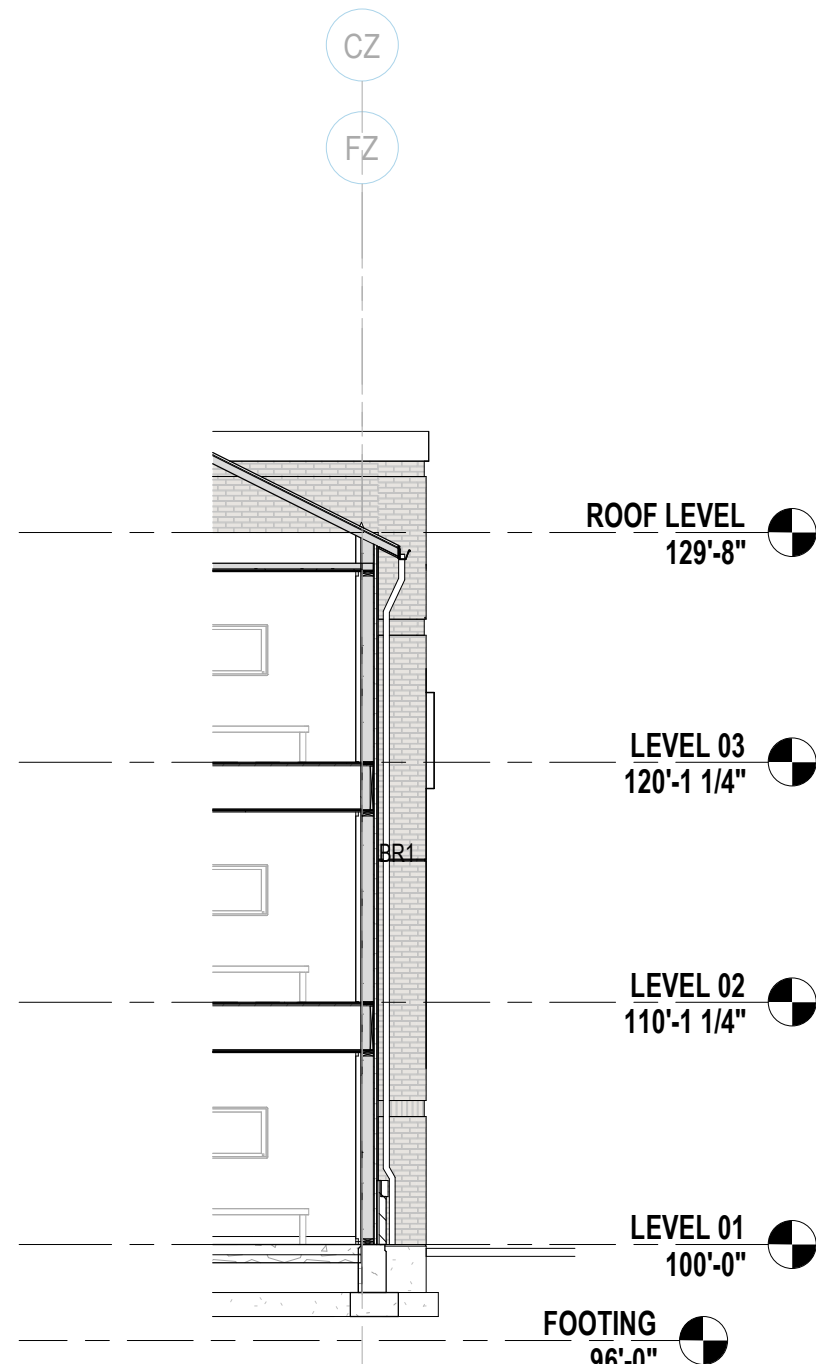


A5 TYP. BREEZEWAY - EAST ELEVATION 2
A-203 1/8" = 1'-0"

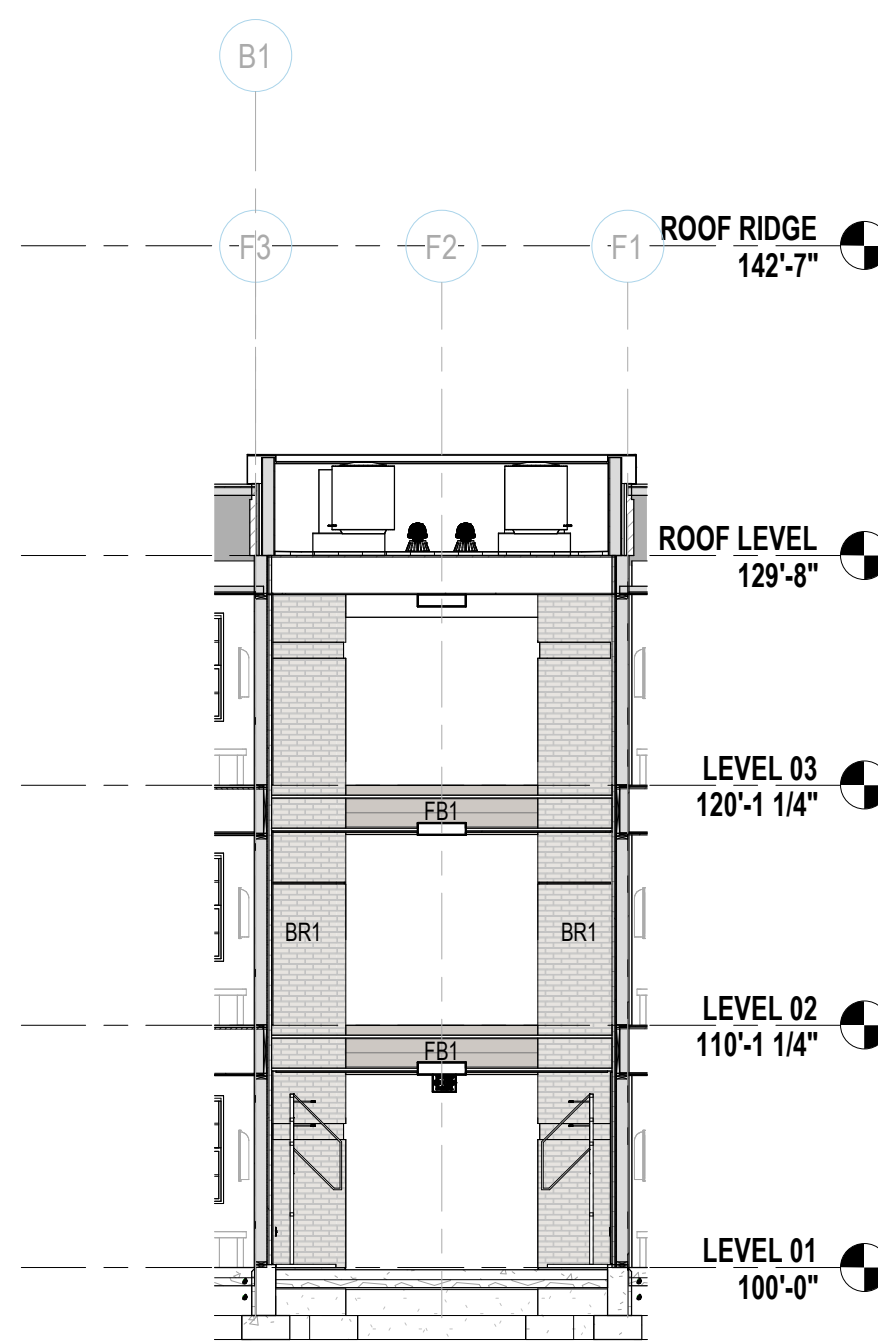


B3 BREEZEWAY - ELEVATION 7 (STREET SIDE)
A-203 1/8" = 1'-0"

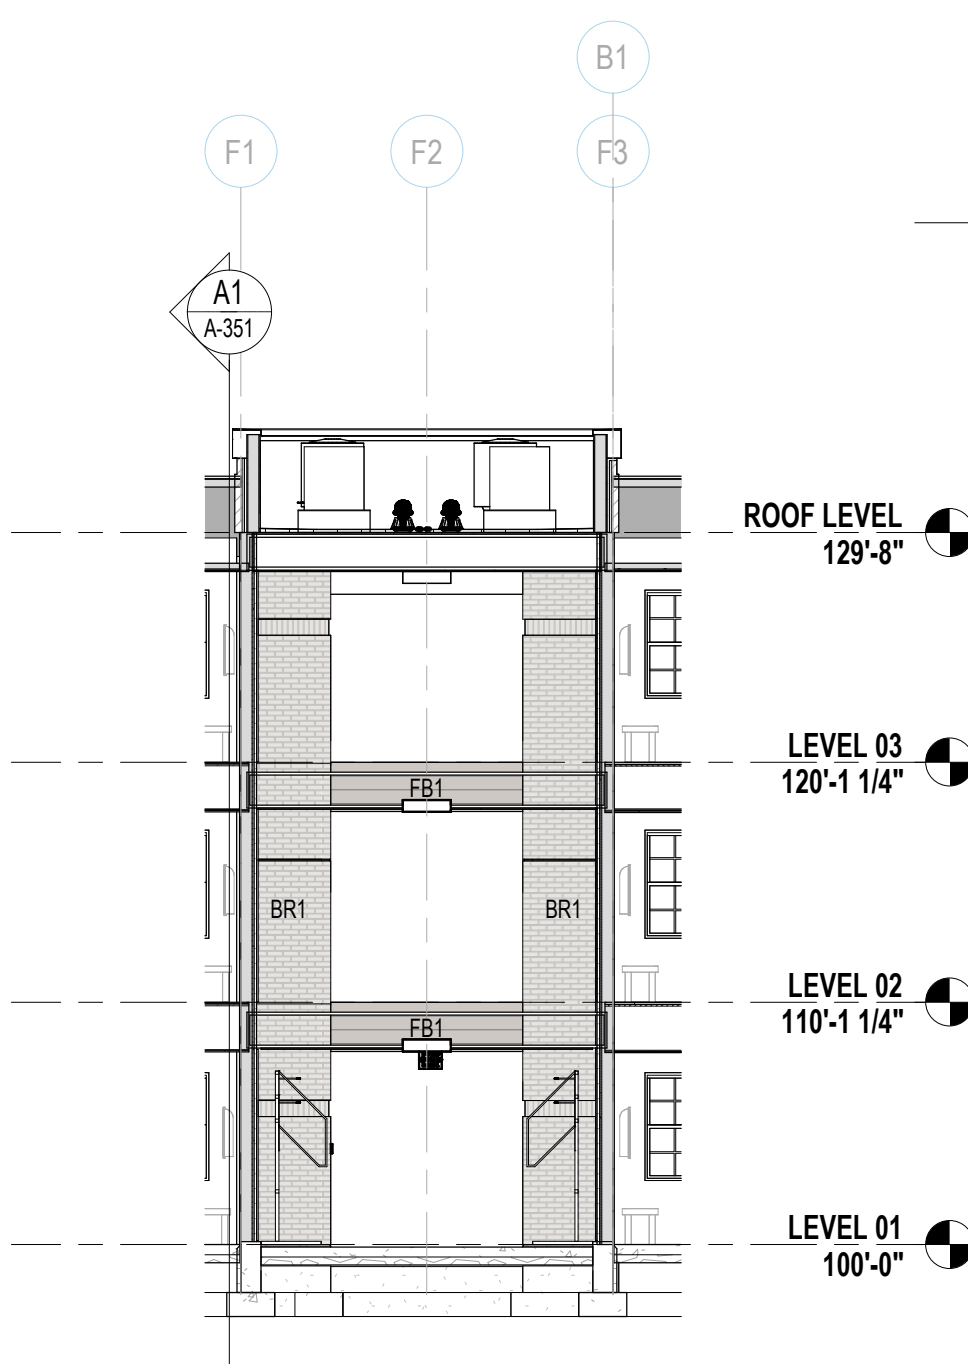

A3 BREEZEWAY - ELEVATION 5 (COURTYARD SIDE)
A-203 1/8" = 1'-0"

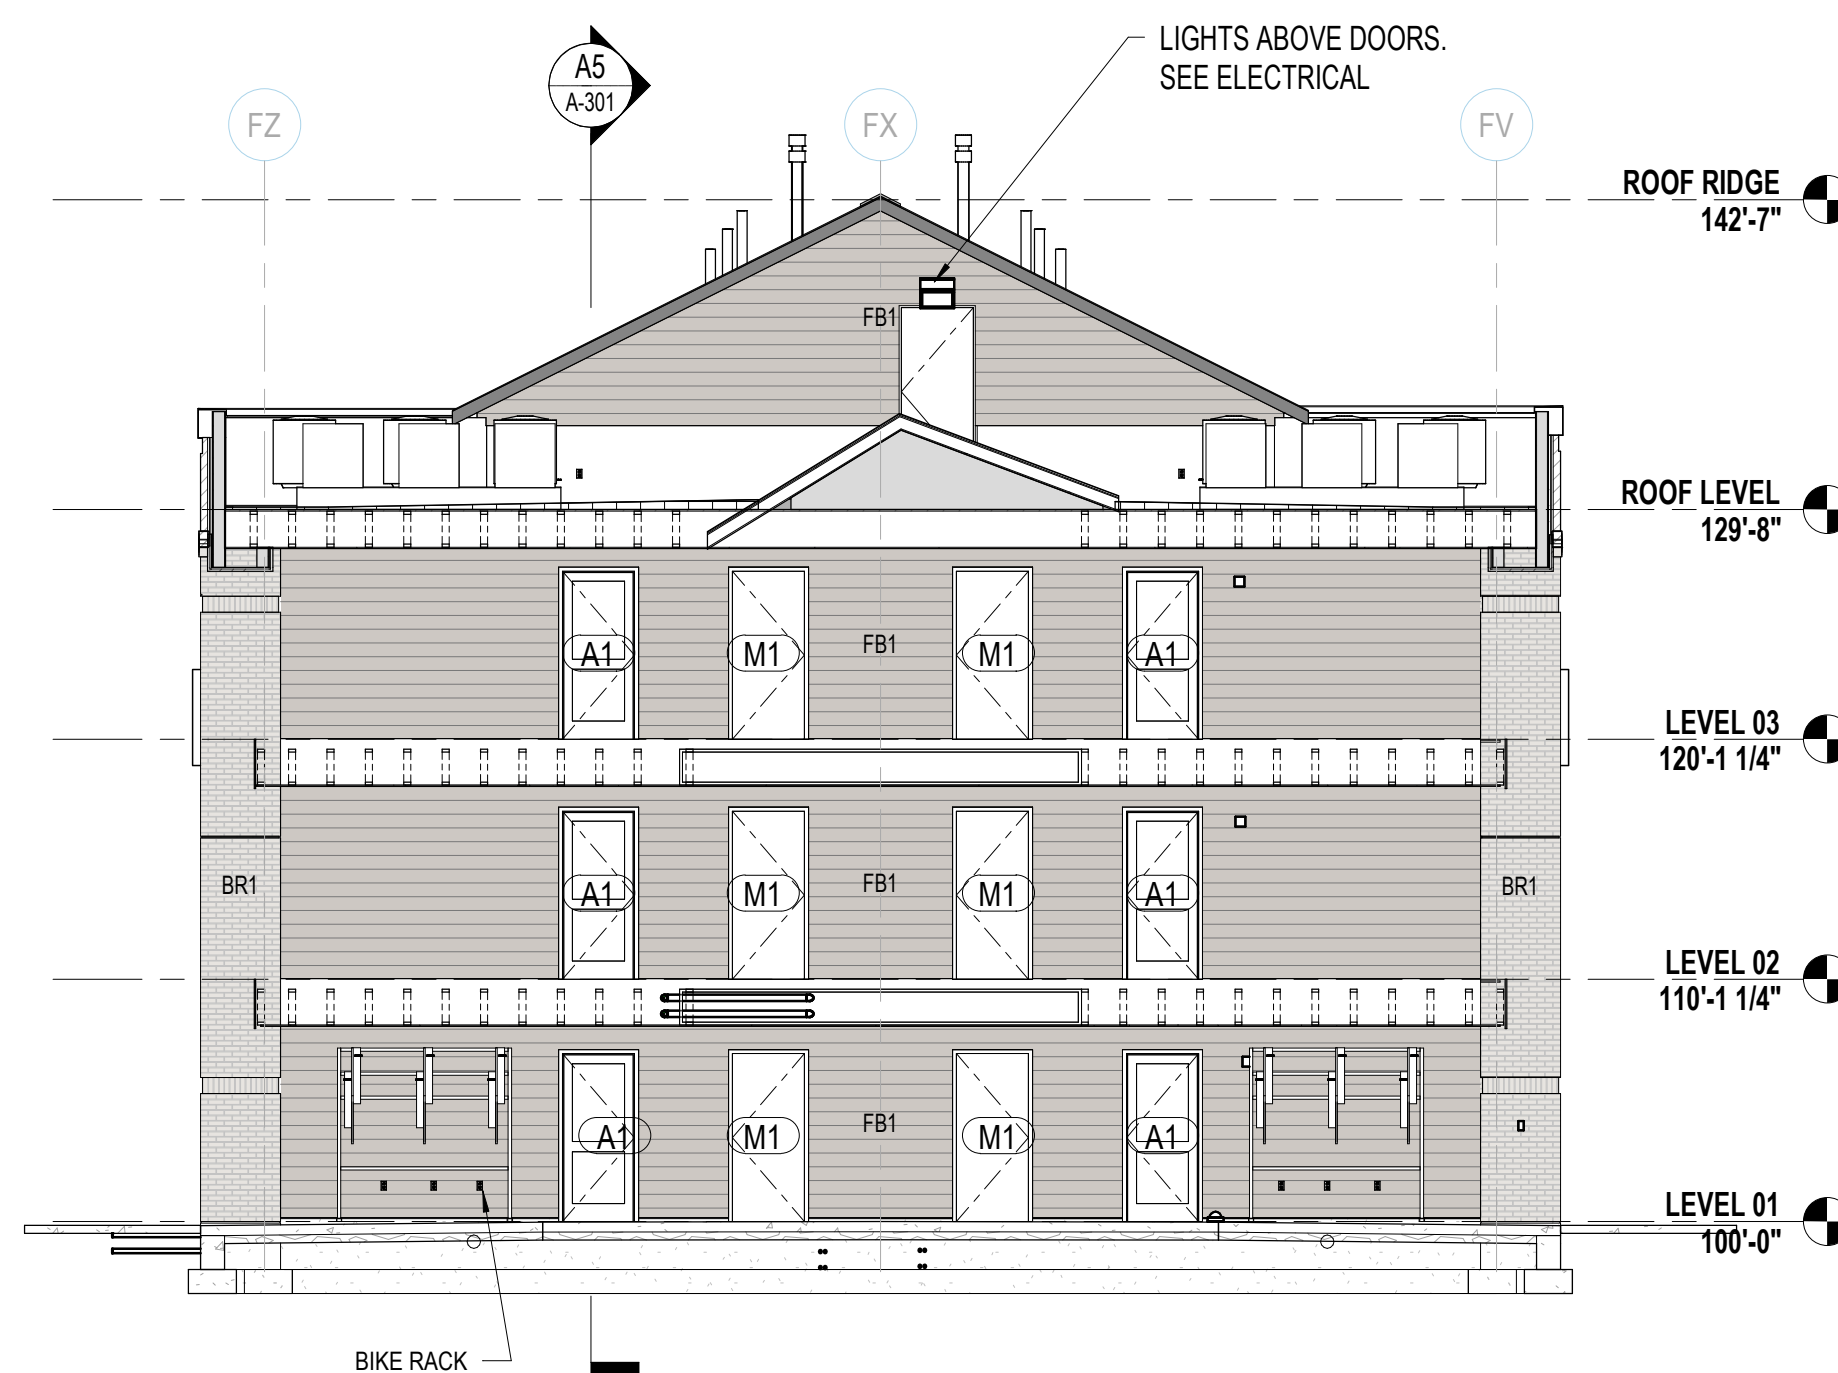

B2 BREEZEWAY - ELEVATION 8 (STREETSIDE LEFT)
A-203 1/8" = 1'-0"

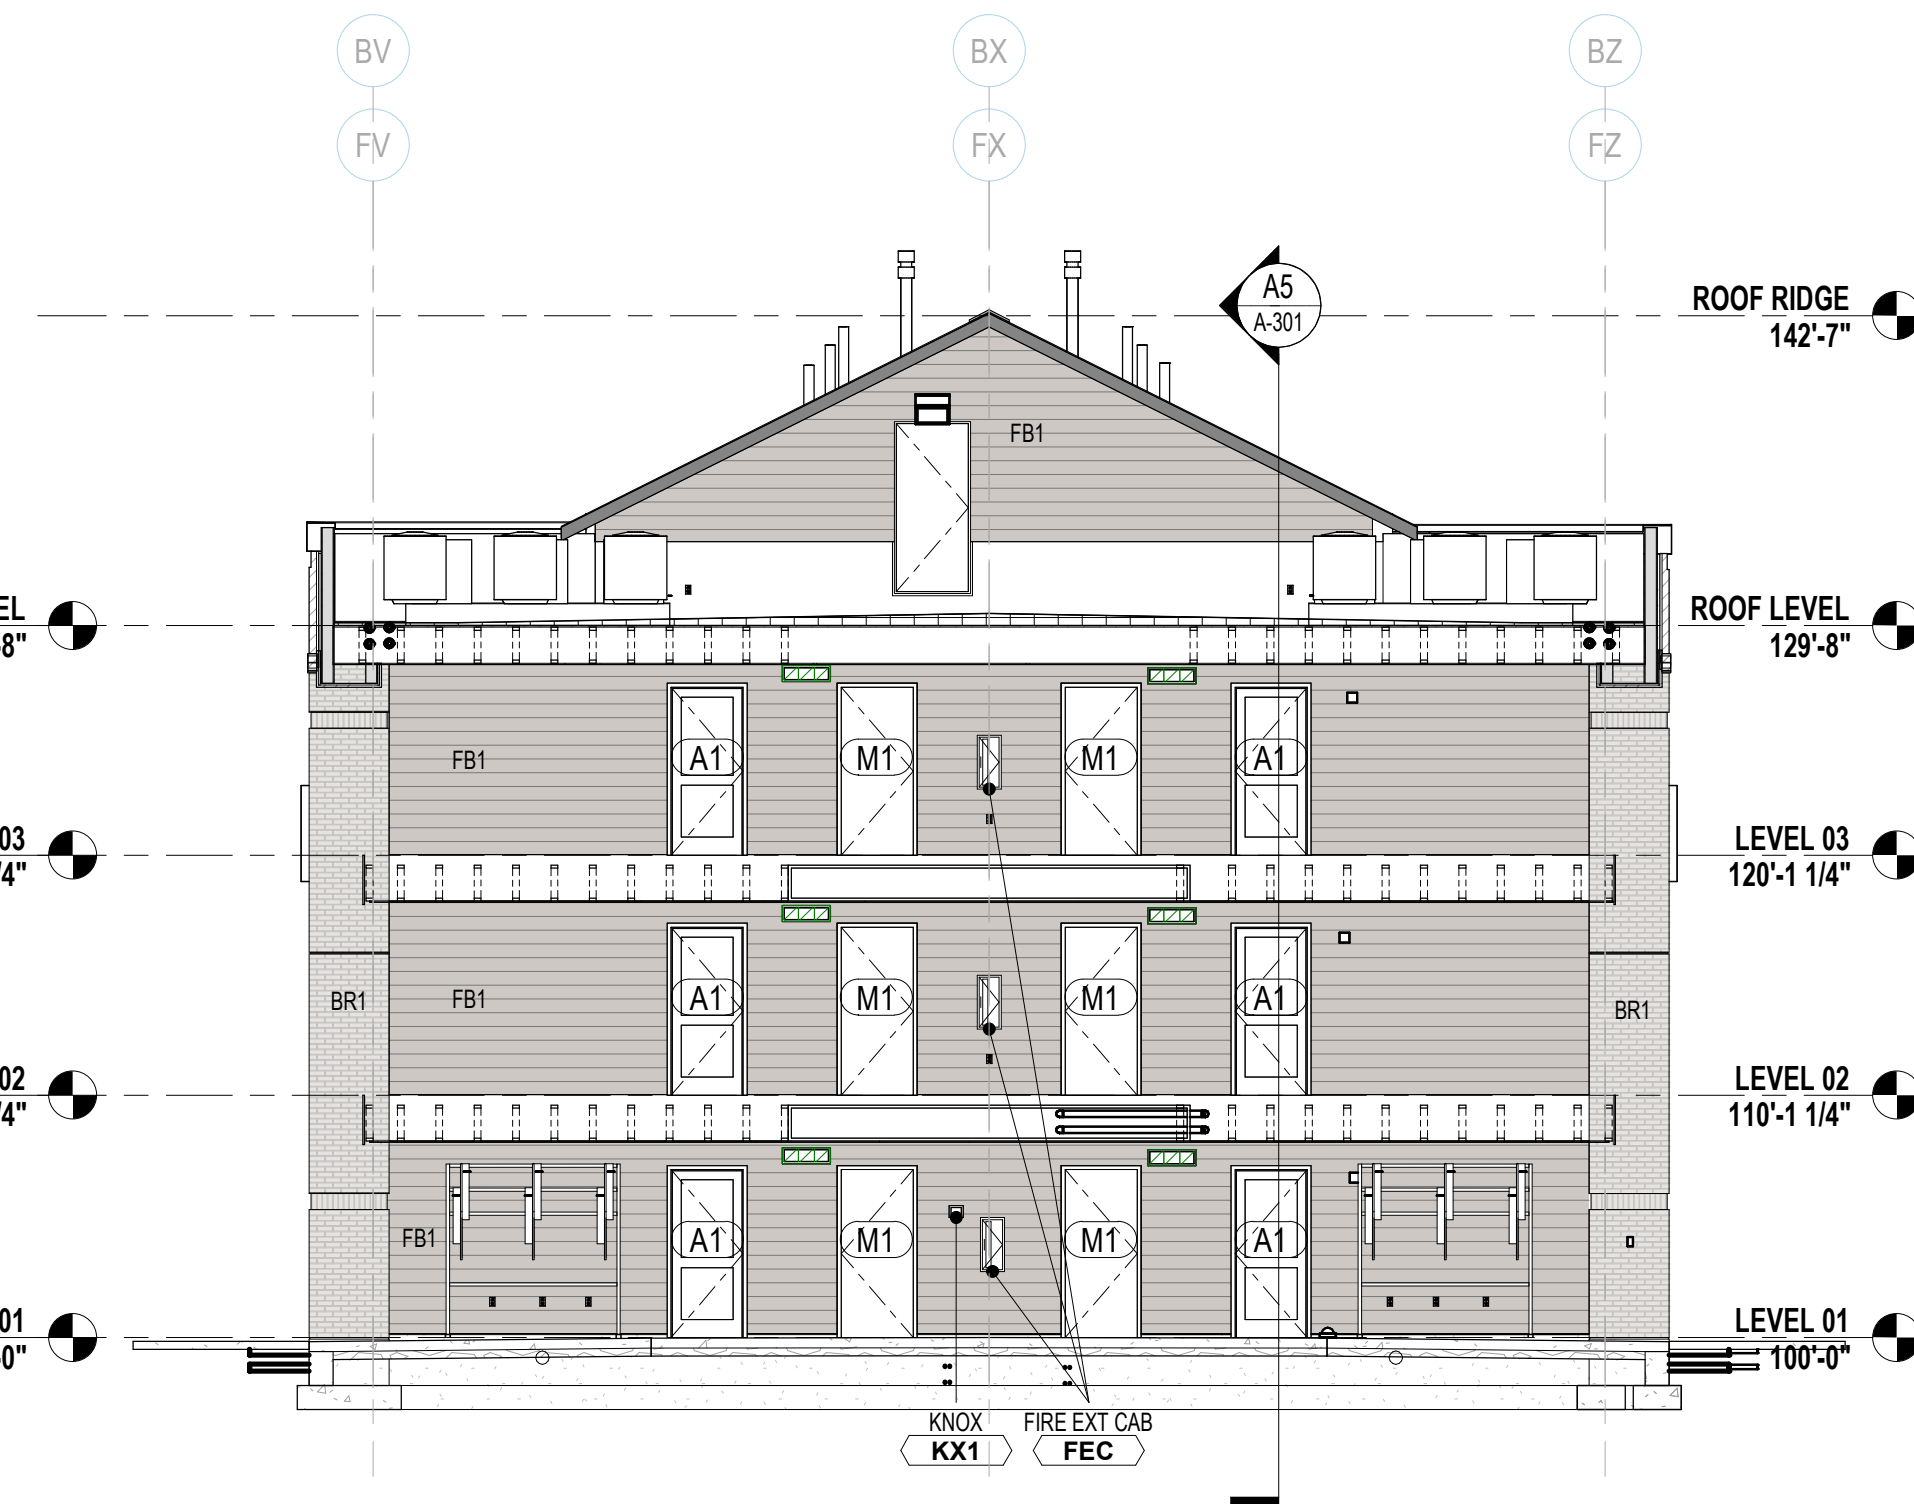

A2 BREEZEWAY - ELEVATION 6 (STREETSIDE RIGHT)
A-203 1/8" = 1'-0"

GENERAL NOTES - BUILDING ELEVATIONS

- A. COORDINATE GRADING SHOWN ON ELEVATIONS WITH CIVIL DRAWINGS.
- B. REFER TO CIVIL DRAWINGS FOR REAL WORLD DATUM REFERENCES.
- C. PROVIDE GUTTERS AND DOWN SPOUTS w/ HEAT CABLE, SNOW FENCES, AND SNOW CLIPS - SEE ROOF PLAN.
- D. FOR TYPICAL WALL ASSEMBLIES INCLUDING MATERIAL DESIGNATIONS AND DETAILING APPROACH, SEE A350s & G500s SERIES SHEETS.
- E. ALL EXPOSED UNFINISHED STEEL TO BE PAINTED UNLESS DIRECTED BY ARCHITECT.
- F. DO NOT SCALE DRAWINGS.


BLDG ELEVATION LEGEND

REFER TO G501 FOR PRODUCT INFORMATION

- BR1 BRICK VENEER
- FB1 FIBER BOARD, HORIZONTAL
- FB2 FIBER BOARD, VERTICAL
- RW4 ASPHALT SHINGLE




ARCH | NEXUS
Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

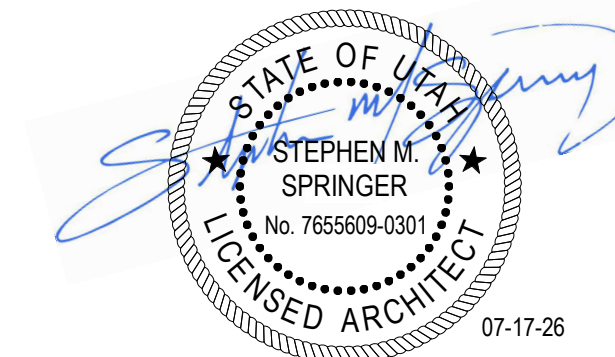

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

Date Revision

BLDG TYPE KEY PLAN

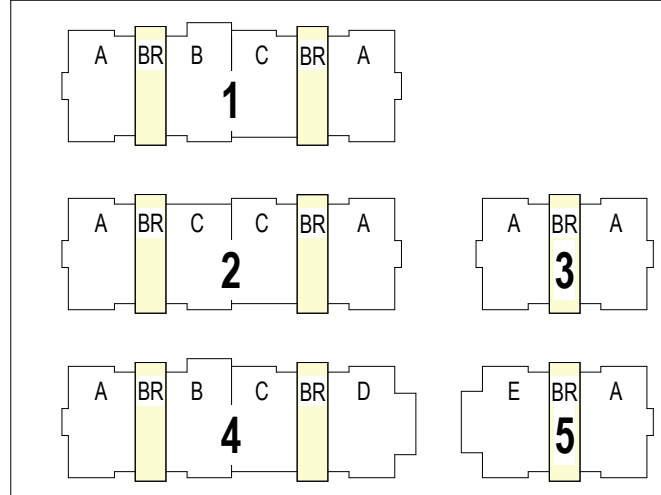


AGENCY APPROVAL

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

BUILDING ELEVATIONS - BREEZEWAY

A-203

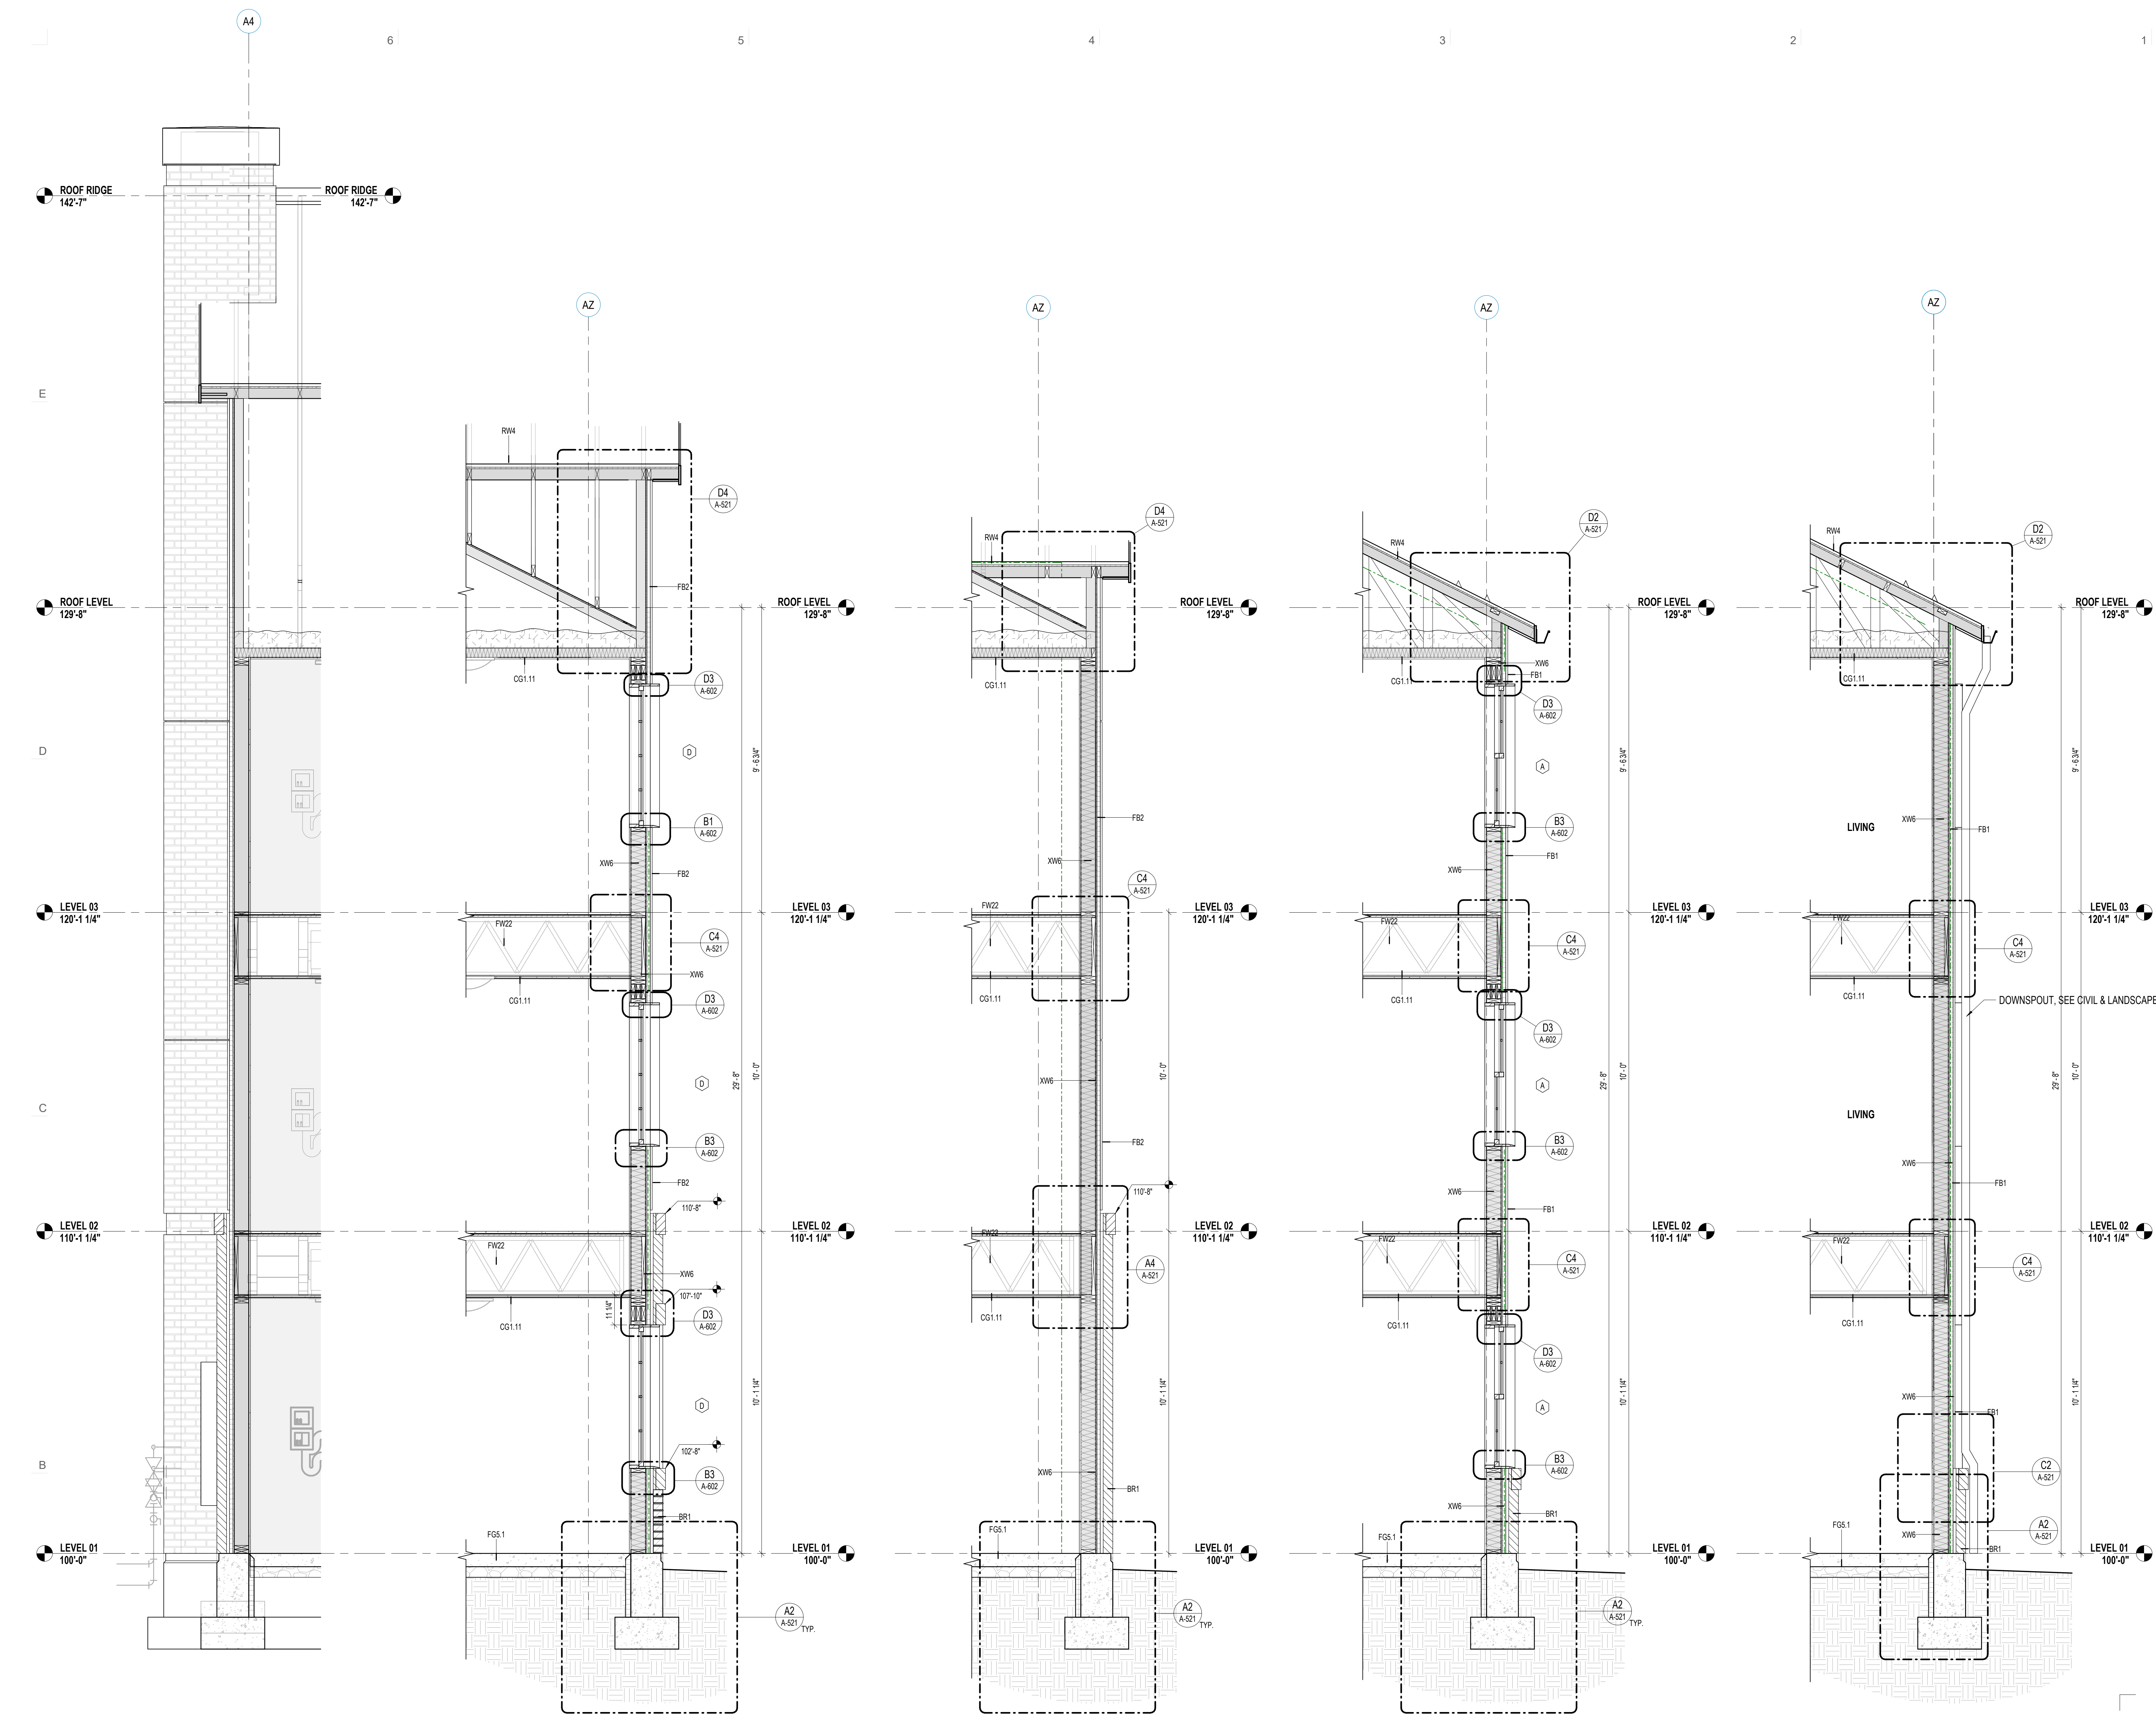

GENERAL NOTES - WALL SECTIONS

- A. WALL DIMENSIONS ARE TO GRID LINE OR FACE OF WALL STRUCTURE. "CLEAR" DIMENSIONS ARE TO FACE OF WALL FINISH.
- B. SEE G SERIES SHEETS FOR WALL TYPES AND TYPICAL ACCESSIBILITY CLEARANCE AND COMPLIANCE REQUIREMENTS.
- C. COORDINATE WITH ELEVATIONS FOR FINISH MATERIAL & PATTERN REQUIREMENTS.
- D. DO NOT SCALE DRAWINGS.


MEMBRANE LEGEND

(THIS SHEET TO BE VIEWED/PRINTED IN COLOR)

- SELF-ADHERED SINGLE-PLY ROOFING MEMBRANE
- SELF-ADHERED FLASHING MEMBRANE
- SELF-ADHERED FOIL-FACED MEMBRANE
- CONTINUOUS FLEXIBLE SILICONE MEMBRANE FLASHING
- ICE & WATER SHIELD
- ROOF UNDERLAYMENT, HIGH TEMP
- WEATHER RESISTANT BARRIER (WRB)
- VAPOR CONTROL LAYER (VCL)
- SMART VAPOR RETARDER
- VAPOR BARRIER, BELOW SLAB
- BELOW GRADE DAMPROOFING
- FLUID-APPLIED WATERPROOFING



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

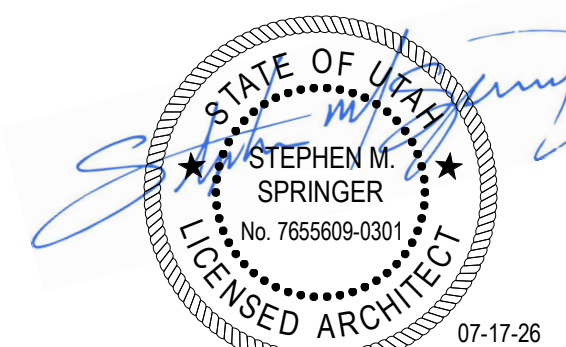

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604

Date Revision

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

WALL SECTIONS

A-351

A6 WALL SECTION - GABLE END AT BUILDING A

A-351 1/2" = 1'-0"

A5 WALL SECTION - BRICK LVL 2, VERTICAL FIBER BOARD WITH WINDOWS

A-351 1/2" = 1'-0"

A4 WALL SECTION - BRICK LVL 2, VERTICAL FIBER BOARD

A-351 1/2" = 1'-0"


A2 WALL SECTION - BRICK WAINSCOT, HORIZONTAL FIBER BOARD WITH WINDOWS

A-351 1/2" = 1'-0"


A1 WALL SECTION - BRICK WAINSCOT, HORIZONTAL FIBER BOARD

A-351 1/2" = 1'-0"


A6 KITCHEN - EAST
A-421 1/4" = 1'-0"

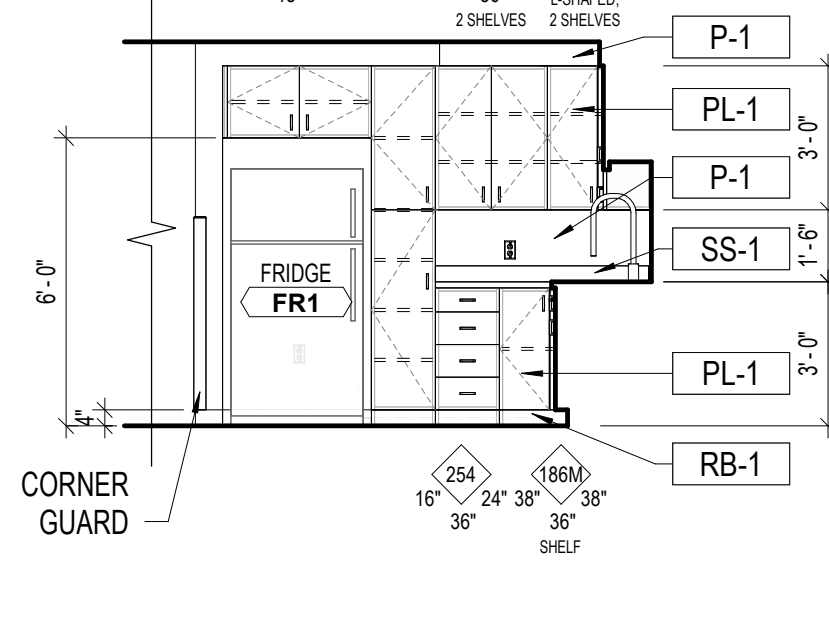


A5 KITCHEN - SOUTH
A-421 1/4" = 1'-0"

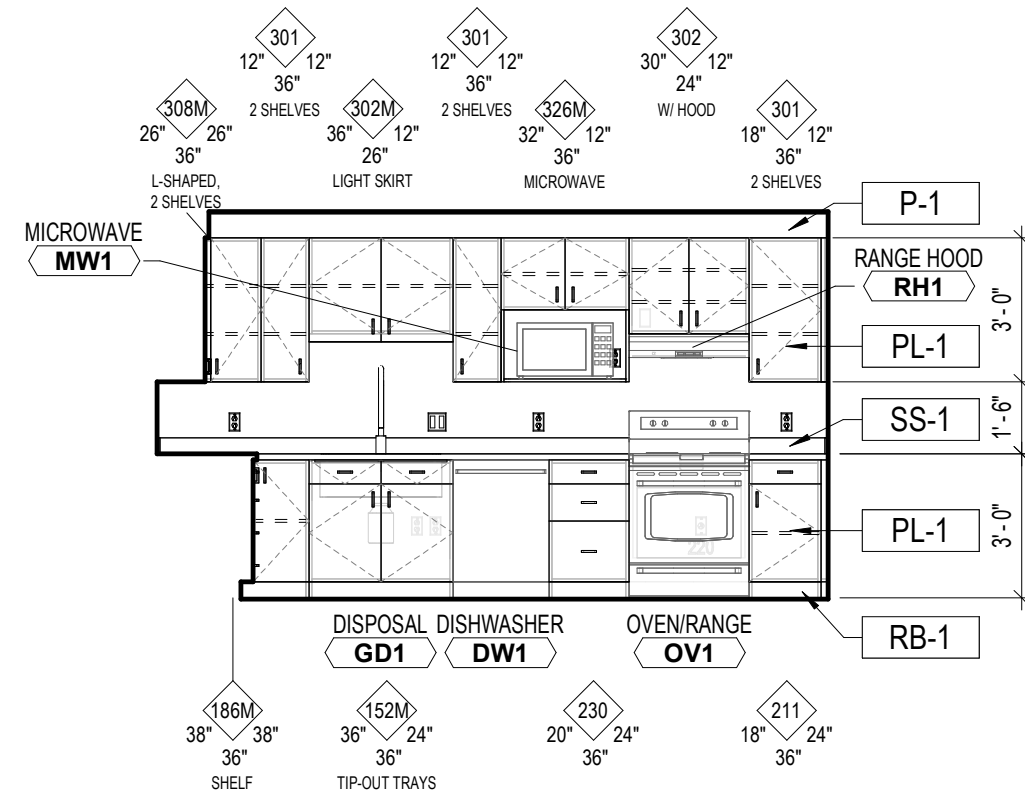


A4 KITCHEN - WEST
A-421 1/4" = 1'-0"

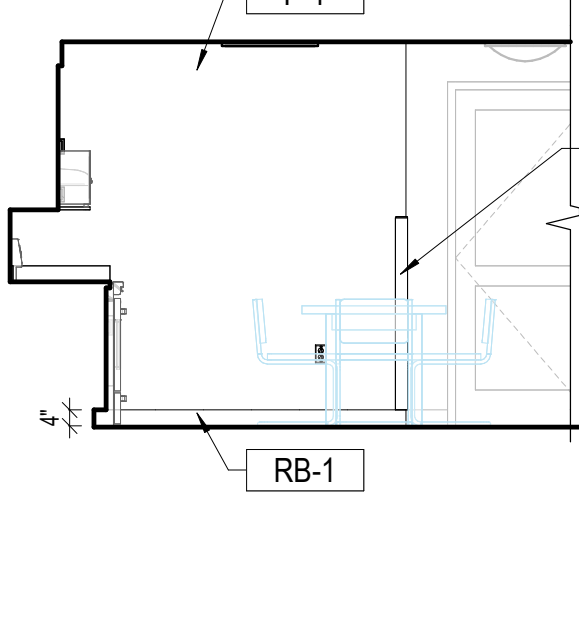

A3 KITCHEN PERSPECTIVE
A-421

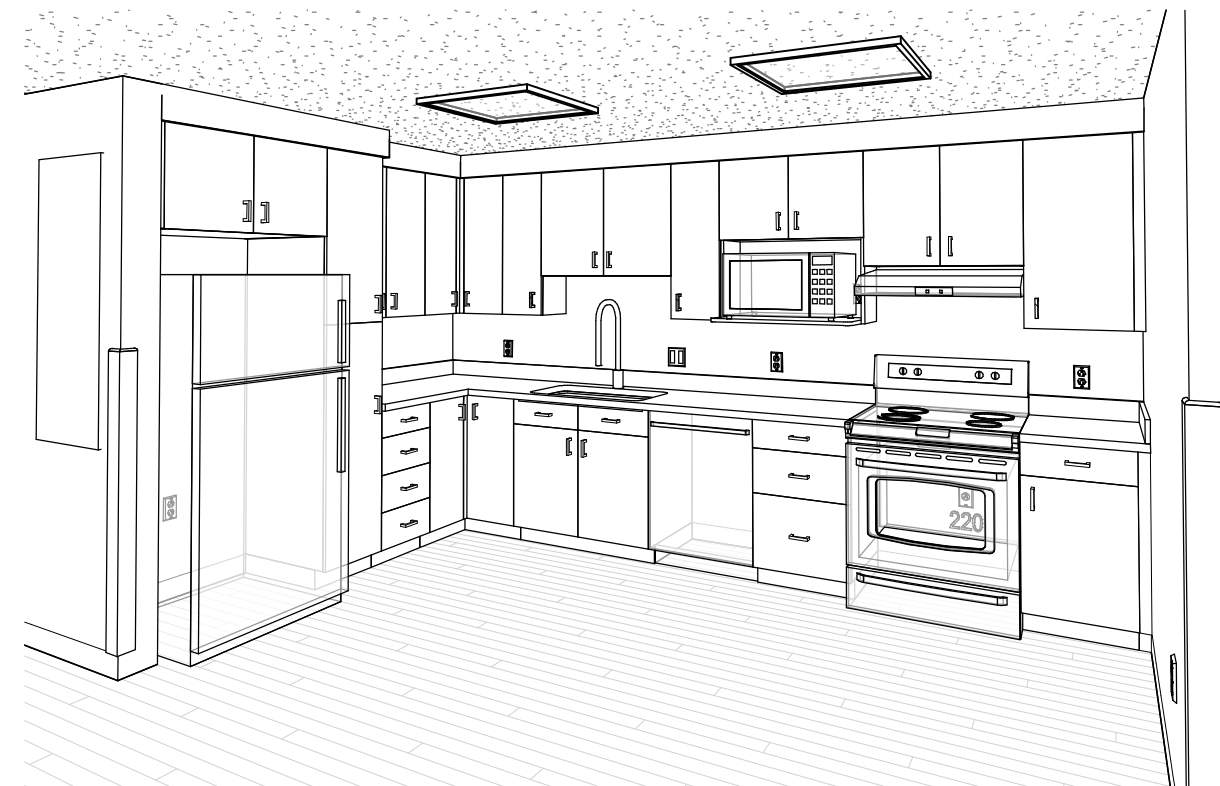


A2 UNIT 2 ENLARGED PLAN
A-421 1/4" = 1'-0"

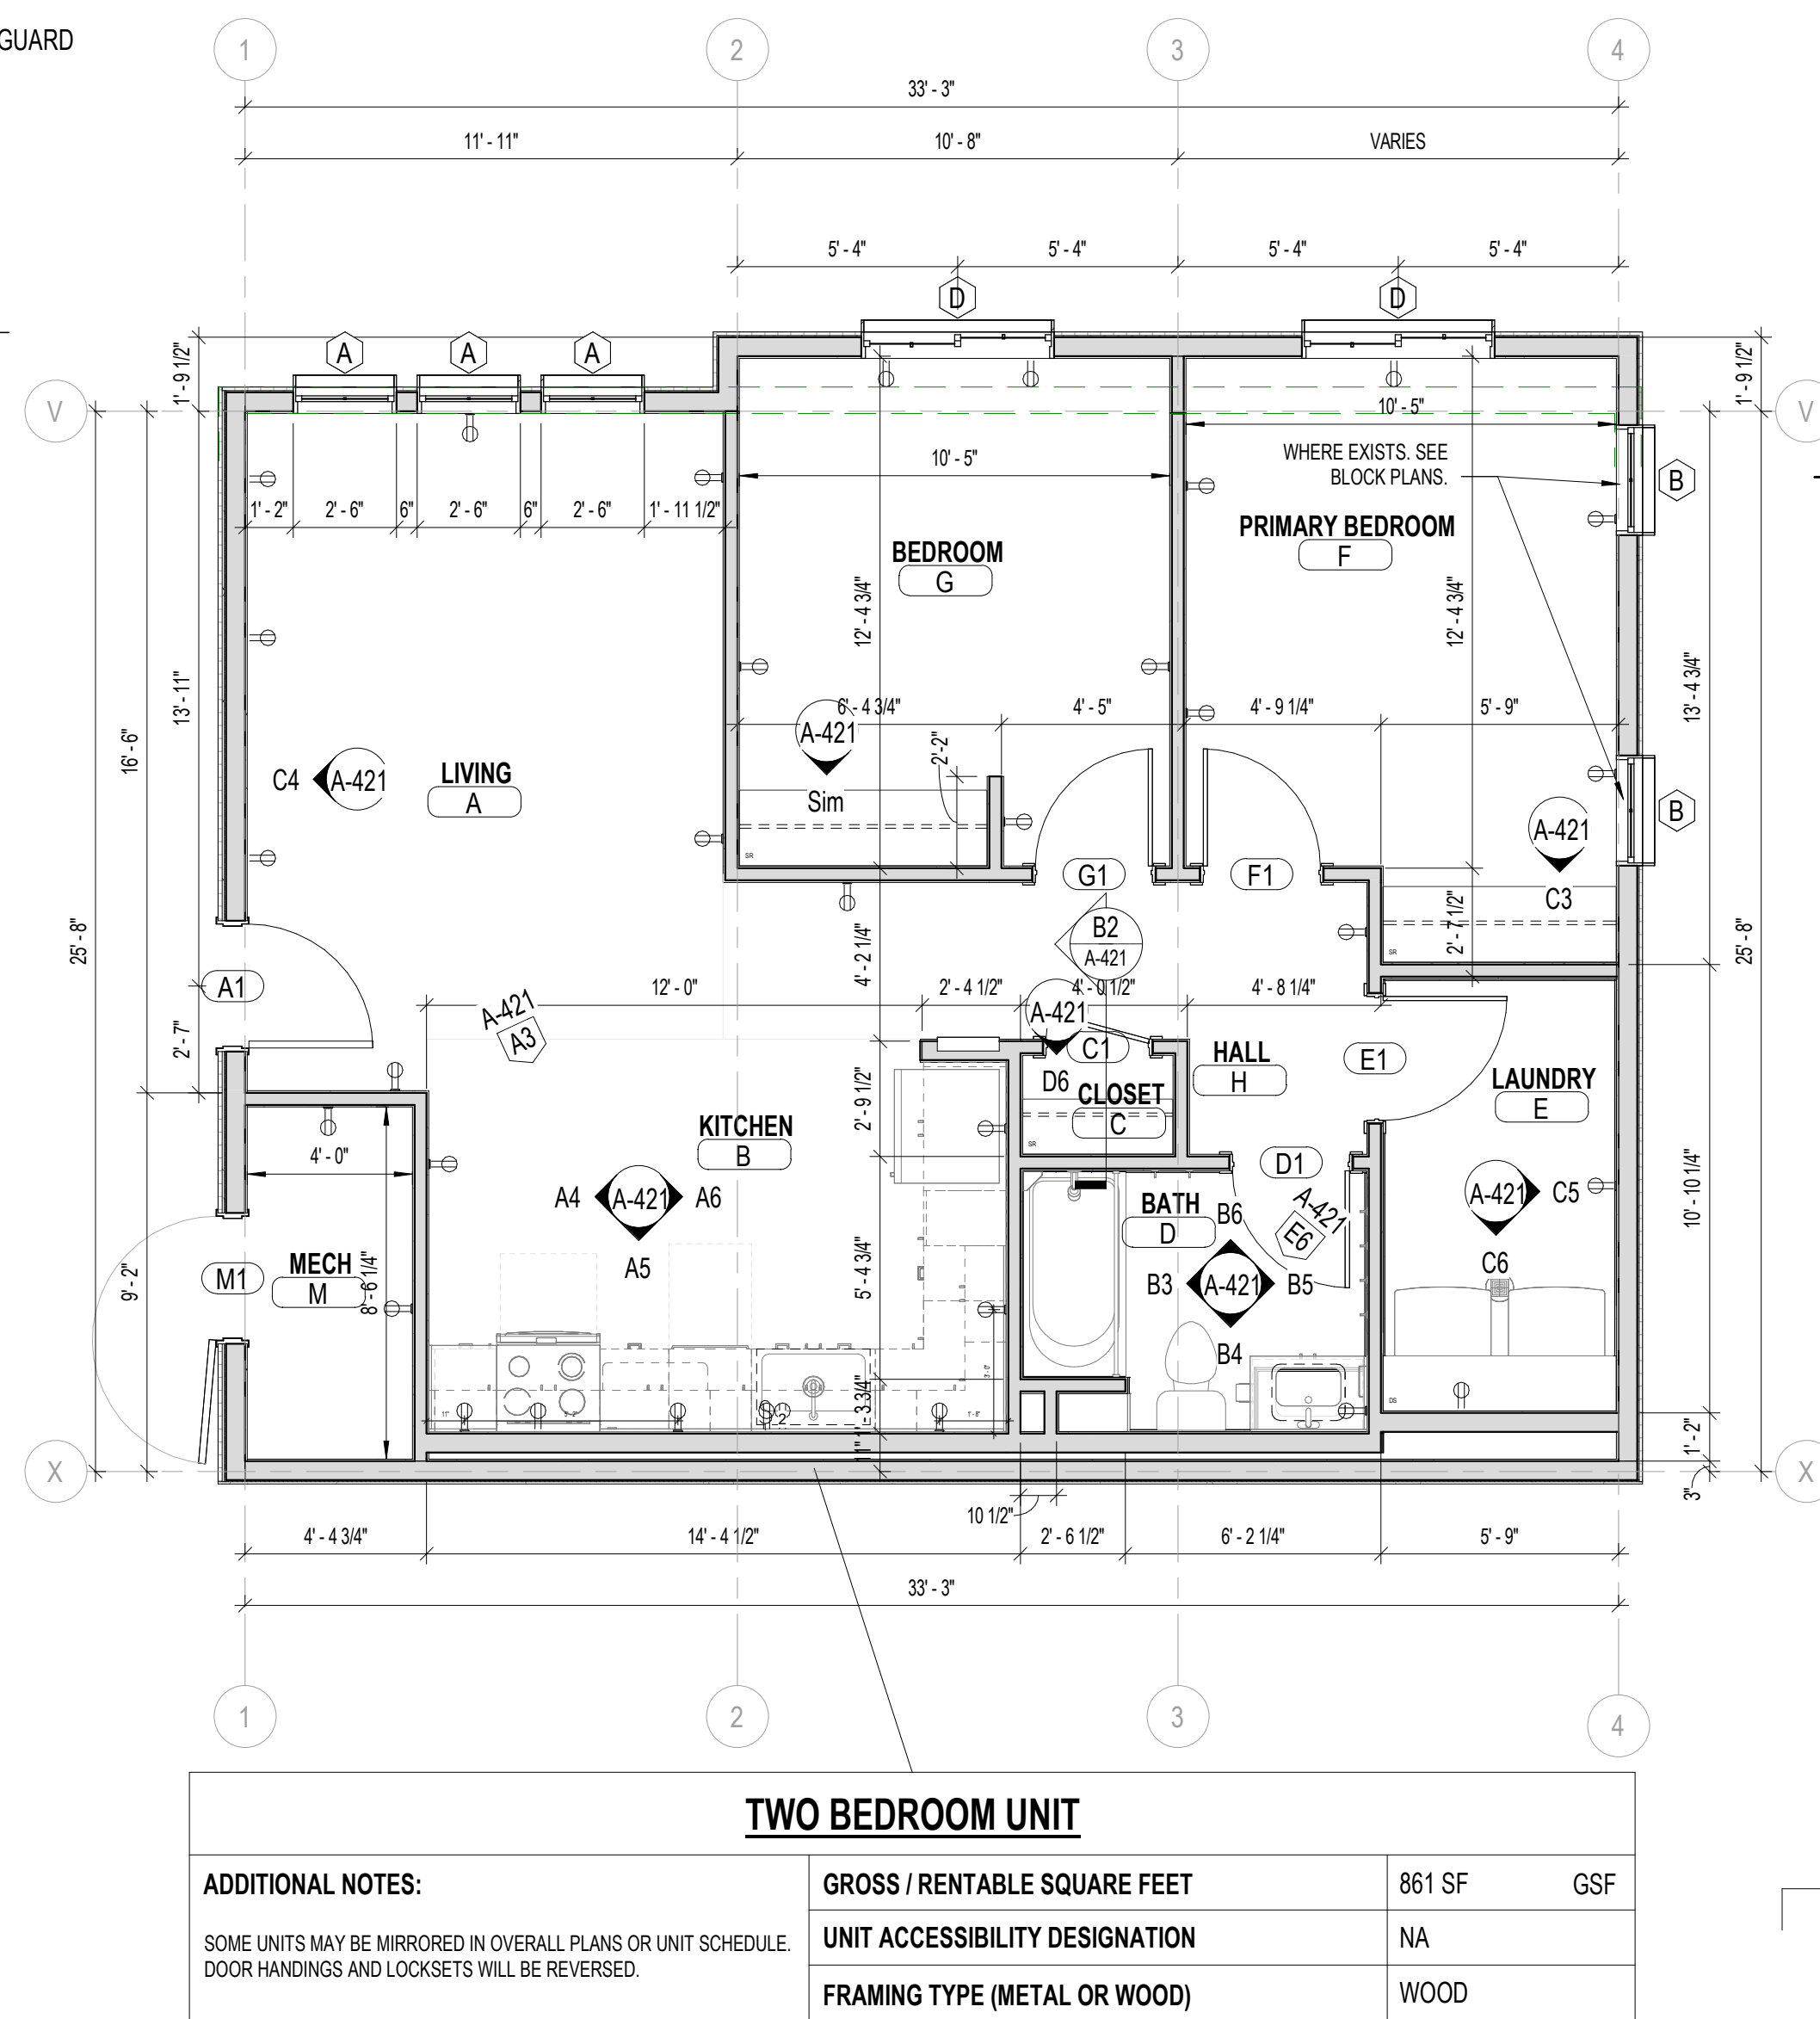

TWO BEDROOM UNIT			
ADDITIONAL NOTES: SOME UNITS MAY BE MIRRORED IN OVERALL PLANS OR UNIT SCHEDULE. DOOR HANDINGS AND LOCKSETS WILL BE REVERSED.	GROSS / RENTABLE SQUARE FEET	861 SF	GSF
	UNIT ACCESSIBILITY DESIGNATION	NA	
	FRAMING TYPE (METAL OR WOOD)	WOOD	

D2 UNIT 2 REFLECTED CEILING & FLOOR TRUSS PLAN
A-421 1/4" = 1'-0"

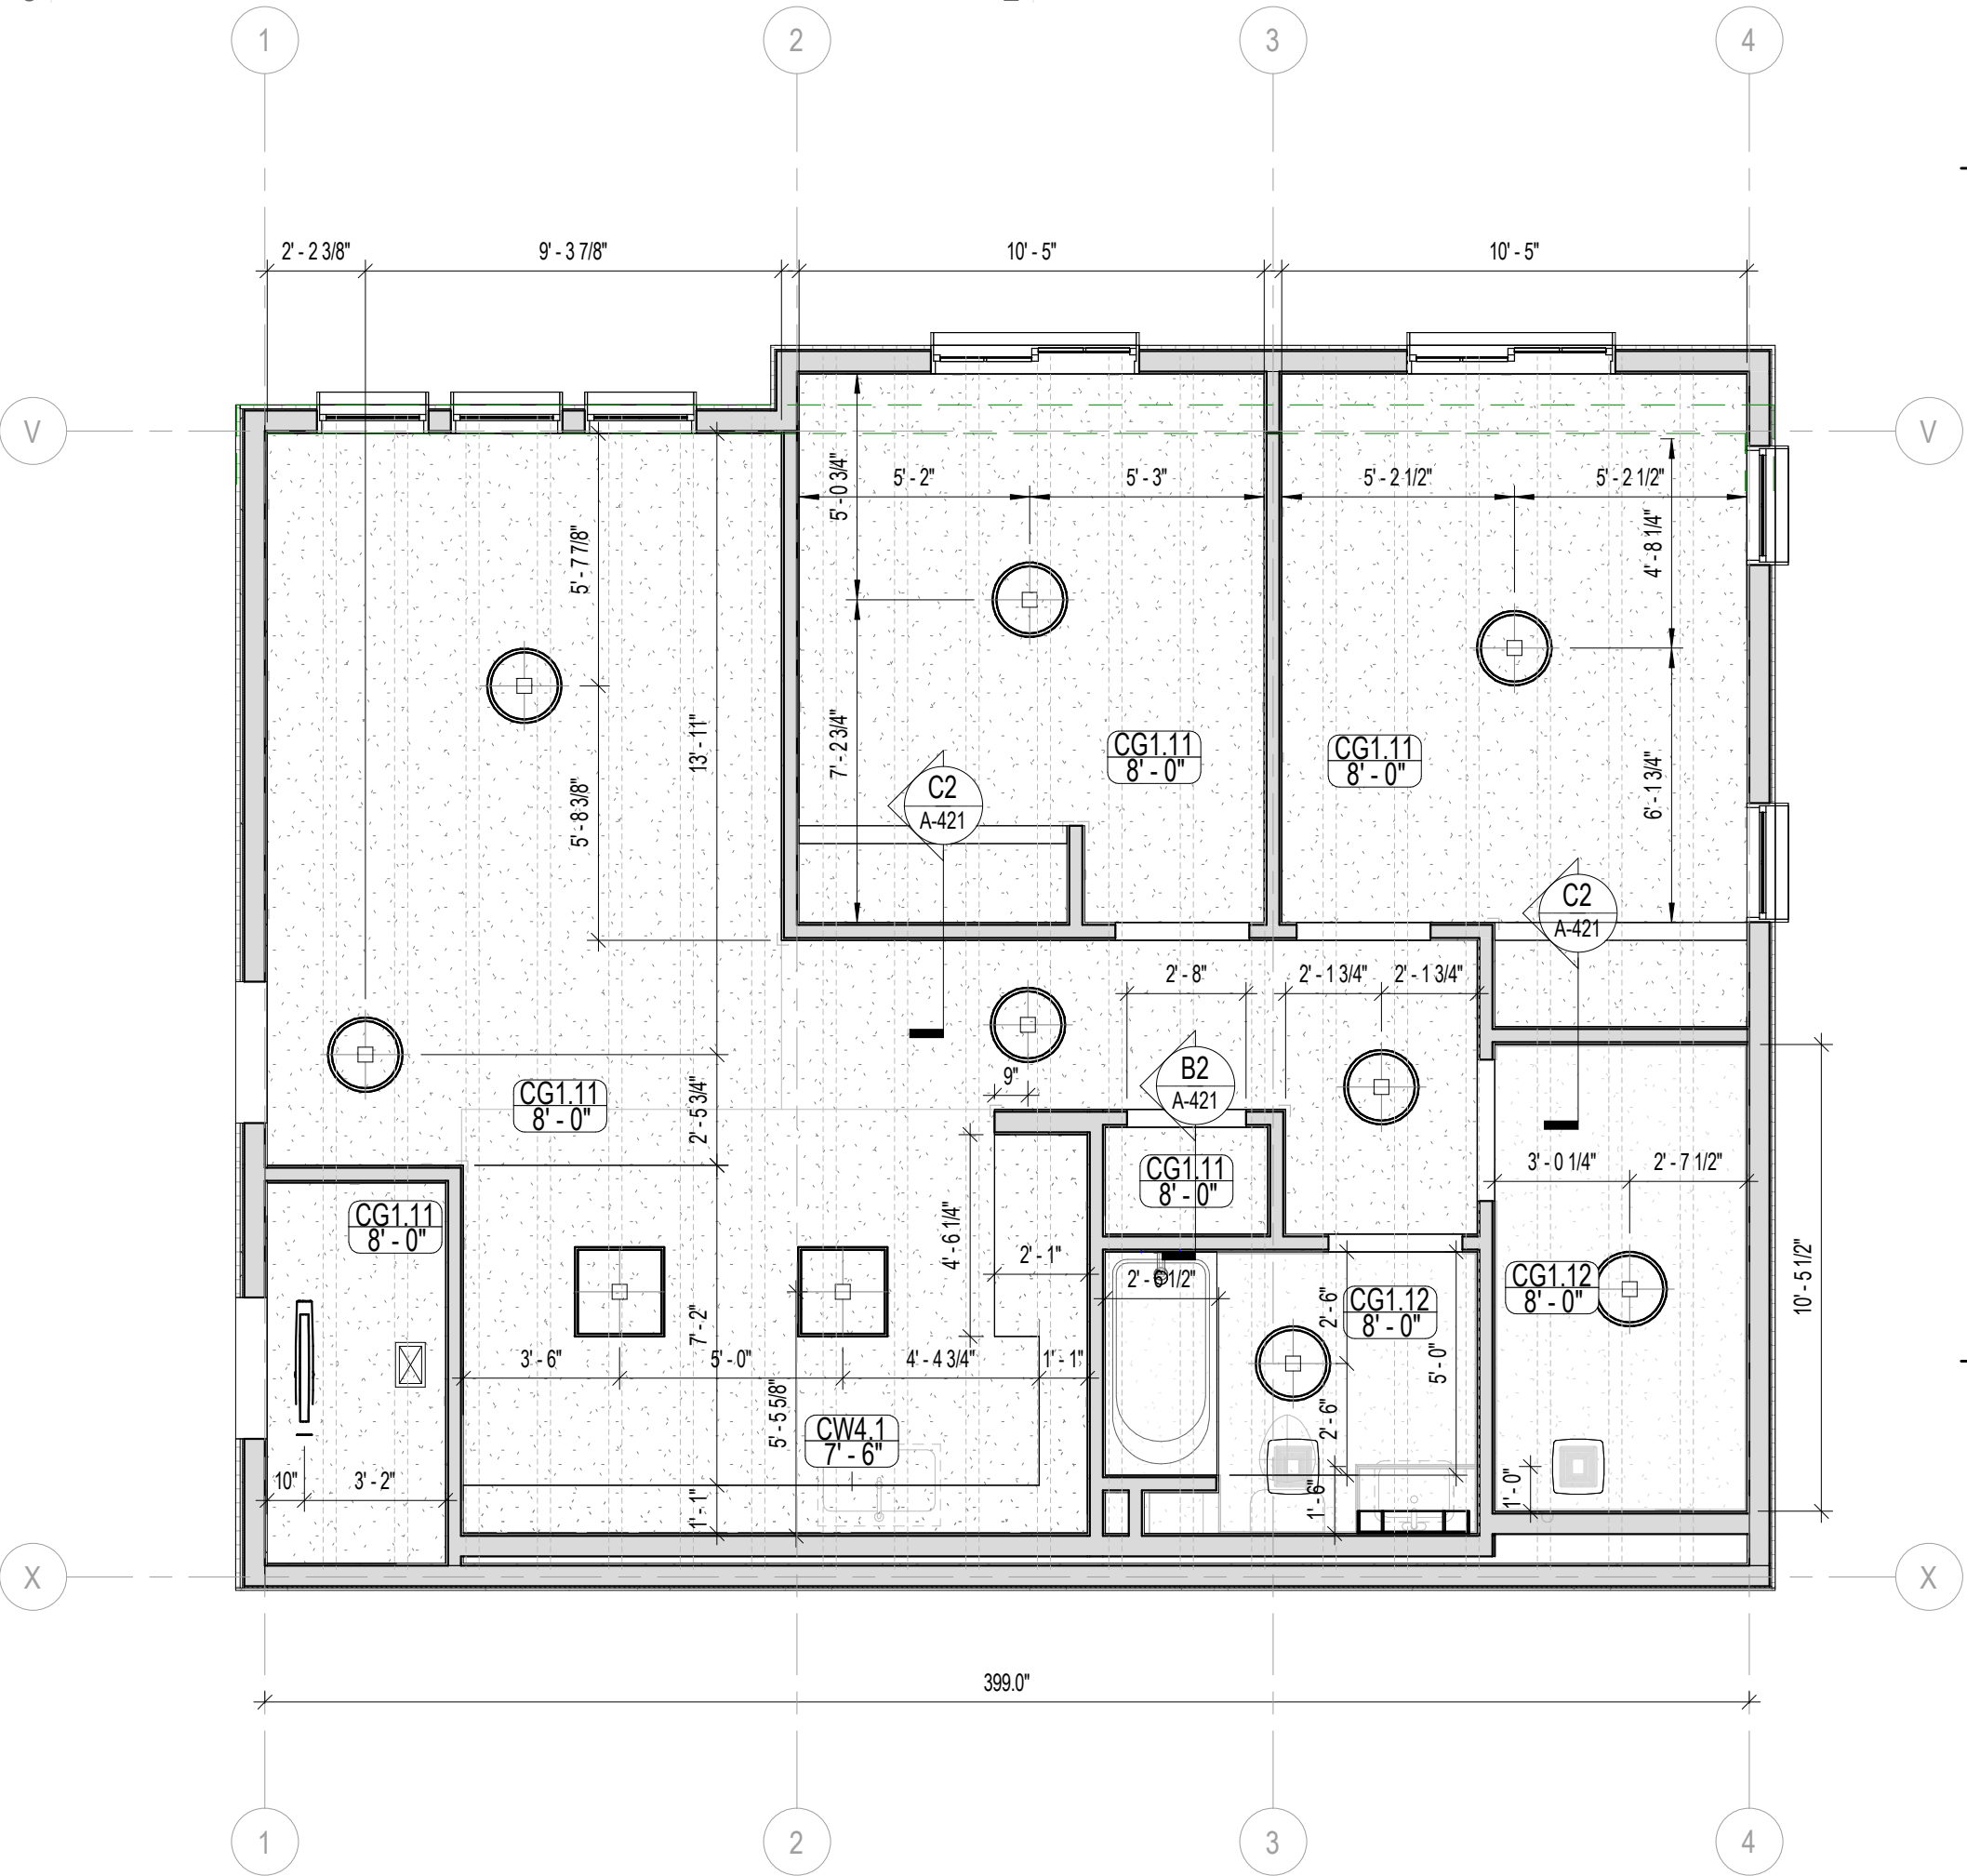

GENERAL NOTES - REFLECTED CEILING PLANS

- SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION REGARDING CEILING FIXTURES.
- THE CEILING HEIGHT SHOWN IN THE ROOM TAG INDICATES THE HEIGHT OF THE DOMINANT CEILING FINISH. SEE ADDITIONAL CEILING FINISH CALLOUTS FOR OTHER CEILING HEIGHTS OR FEATURES.
- THE CONTRACTOR SHALL COORDINATE ALL TRADES TO ENSURE THAT DESIGNATED CEILING HEIGHTS CAN BE ACHIEVED. NOTIFY ARCHITECT OF ANY CONFLICTS OR CONDITIONS THAT PREVENT THIS FROM OCCURRING BEFORE PROCEEDING WITH THE WORK.
- PROVIDE REQUIRED BLOCKING AND SUPPORT FOR CEILING FANS AND ALL OTHER CEILING MOUNTED FIXTURES.
- PROVIDE APPROPRIATE TRIM OR ESCUTCHEONS FOR ALL ITEMS PENETRATING CEILINGS FROM FINISH SPACE.
- LIGHT FIXTURES IN CEILINGS TO RECEIVE BATT INSULATION ON TOP SHALL HAVE A BOX OUT TO PROTECT THE INSULATION FROM THE HEAT OF THE LIGHT SOURCE.
- ALL SOFFIT DIMENSIONS ARE TO FACE OF FINISH MATERIAL.
- SEE G SERIES SHEETS FOR EXPANSION JOINT SCHEDULE.
- FOR TYPICAL CEILING AND SEISMIC BRACING DETAILS, REFER TO A700s SHEET SERIES.
- DO NOT SCALE DRAWINGS.

GENERAL NOTES - ENLARGED FLOOR PLANS

- ALL NEW WALL ASSEMBLIES ARE CONTINUOUS TO BOTTOM OF DECK UNLESS NOTED OTHERWISE.
- PLAN WALL DIMENSIONS ARE TO GRID LINE OR FACE OF WALL STRUCTURE, UNLESS NOTED OTHERWISE. "CLEAR" DIMENSIONS ARE TO FACE OF WALL FINISH.
- WHERE THE FINISH SCHEDULE OR INTERIOR ELEVATIONS CALL FOR TILE, REPLACE GYPSUM BOARD SHOWN IN THE WALL'S ASSEMBLY WITH TILE BACKER BOARD WHERE TILE OCCURS. REPLACE OTHER GYPSUM BOARD SHOWN IN THAT WALL'S ASSEMBLY WITH MOISTURE RESISTANT GYPSUM BOARD WHERE NO TILE OCCURS.
- PROVIDE BACKING / SUPPORT FOR ALL MOUNTED FIXTURES, EQUIPMENT, CASEWORK, AND/OR SYSTEMS FURNITURE. COORDINATE WITH FLOOR PLANS, AND INTERIOR ELEVATIONS PRIOR TO THE COVERING OF STUD FRAMING. REFER TO MANUFACTURER'S RECOMMENDATIONS WHERE APPLICABLE. OTHERWISE REFER TO DETAILS ON A700s SHEET SERIES.
- SEE STRUCTURAL, MECHANICAL AND ELECTRICAL DRAWINGS FOR MORE INFORMATION.
- SEE G SERIES SHEETS FOR WALL TYPES AND TYPICAL ACCESSIBILITY CLEARANCE AND COMPLIANCE REQUIREMENTS, REGULATORY PLAN INFORMATION, INCLUDING RATED ASSEMBLY EXTENTS, OCCUPANCY AND EGRESS SYSTEMS.
- SEE A100s SERIES DIMENSIONAL CONTROL PLANS FOR ALIGNMENT / POSITION OF STRUCTURAL ELEMENTS AND OTHER KEY DIMENSIONS.
- WHERE PROVIDED, DOOR AND WINDOW DIMENSIONS ARE TO EDGE OF OPENING. OPENING DIMENSIONS ARE NOMINAL. CONTRACTOR SHALL COORDINATE DIMENSIONS OF ALL ROUGH OPENINGS AND ACTUAL FRAME SIZES.
- WHERE DOOR LOCATIONS ARE NOT DIMENSIONED, SEE DETAILS REFERENCED IN DOOR SCHEDULE BY SPECIFIC CONDITION. OTHERWISE, THE HINGE SIDE OF DOOR ROUGH OPENINGS SHALL BE LOCATED 4" FROM THE ADJACENT PERPENDICULAR WALL. SUBJECT TO MAINTENANCE OF REQUIRED ADA CLEARANCES REFERENCED IN THE G700s SHEET SERIES.
- DO NOT SCALE DRAWINGS.

GENERAL NOTES - INTERIOR ELEVATIONS

- SEE REFLECTED CEILING PLANS FOR CEILING FEATURES AND CEILING FINISH LOCATIONS.
- SEE PLANS, SECTIONS, SCHEDULES AND ADDITIONAL DETAILS FOR MORE MATERIAL AND FINISH INFORMATION.
- ENSURE THAT ALL REQUIRED FIXTURE AND CABINET CLEARANCES AND OTHER REQUIREMENTS ARE MAINTAINED PURSUANT TO ADAAG AND ANSI A117.1. SEE G700s SERIES SHEETS FOR GENERAL GUIDANCE ON COMMON MOUNTING HEIGHTS.
- PROVIDE BACKING / SUPPORT FOR ALL MOUNTED FIXTURES, EQUIPMENT, CASEWORK, AND/OR SYSTEMS FURNITURE. COORDINATE WITH FLOOR PLANS, AND INTERIOR ELEVATIONS PRIOR TO THE COVERING OF STUD FRAMING. REFER TO MANUFACTURER'S RECOMMENDATIONS WHERE APPLICABLE. OTHERWISE REFER TO DETAILS ON A700s SHEET SERIES.
- ON ALL EXPOSED CABINET SIDES, INCLUDING KNEE OPENINGS, PROVIDE FINISHED FACE TO MATCH CABINET FRONTS.
- WHERE BACKSPASHES ARE NOTED, PROVIDE SIDESPLASHES WHENEVER COUNTERTOPS ARE ADJACENT TO WALLS.
- THE CONTRACTOR IS TO COORDINATE WALK THROUGH(S) WITH THE OWNER AND THE ARCHITECT TO REVIEW PLACEMENT OF ELECTRICAL, MECHANICAL AND OTHER EQUIPMENT ITEMS FOR KEY ROOMS. SCHEDULING OF ROOM REVIEWS SHOULD BE COORDINATED DURING THE OAC MEETINGS.
- DO NOT SCALE DRAWINGS.

NOT FOR
CONSTRUCTION


BP3 - 100% CD
SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

ENLARGED
PLANS - UNIT 2

A-421

BRIGHAM YOUNG UNIVERSITY
WYMOUNT TERRACE SOUTH
WYMOUNT TERRACE
PROVO, UT 84604

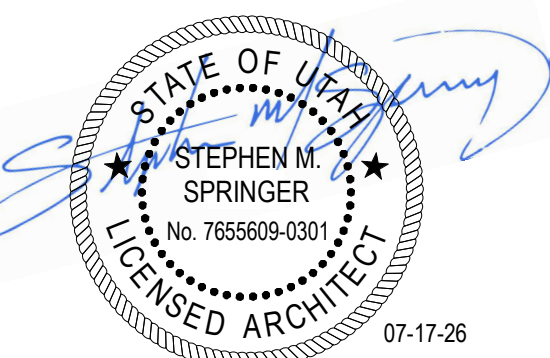


Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

Original drawings remain the property of the Architect and as such the Architect retains total ownership and control. The design represented by these drawings is sold to the client for a one time use, unless otherwise agreed upon in writing by the Architect.
© ARCH NEXUS All Rights Reserved

WYMOUNT TERRACE
PROVO, UT 84604

A


A6 EQUIPMENT PLAN - BREEZEWAY
A-425 1/4" = 1'-0"

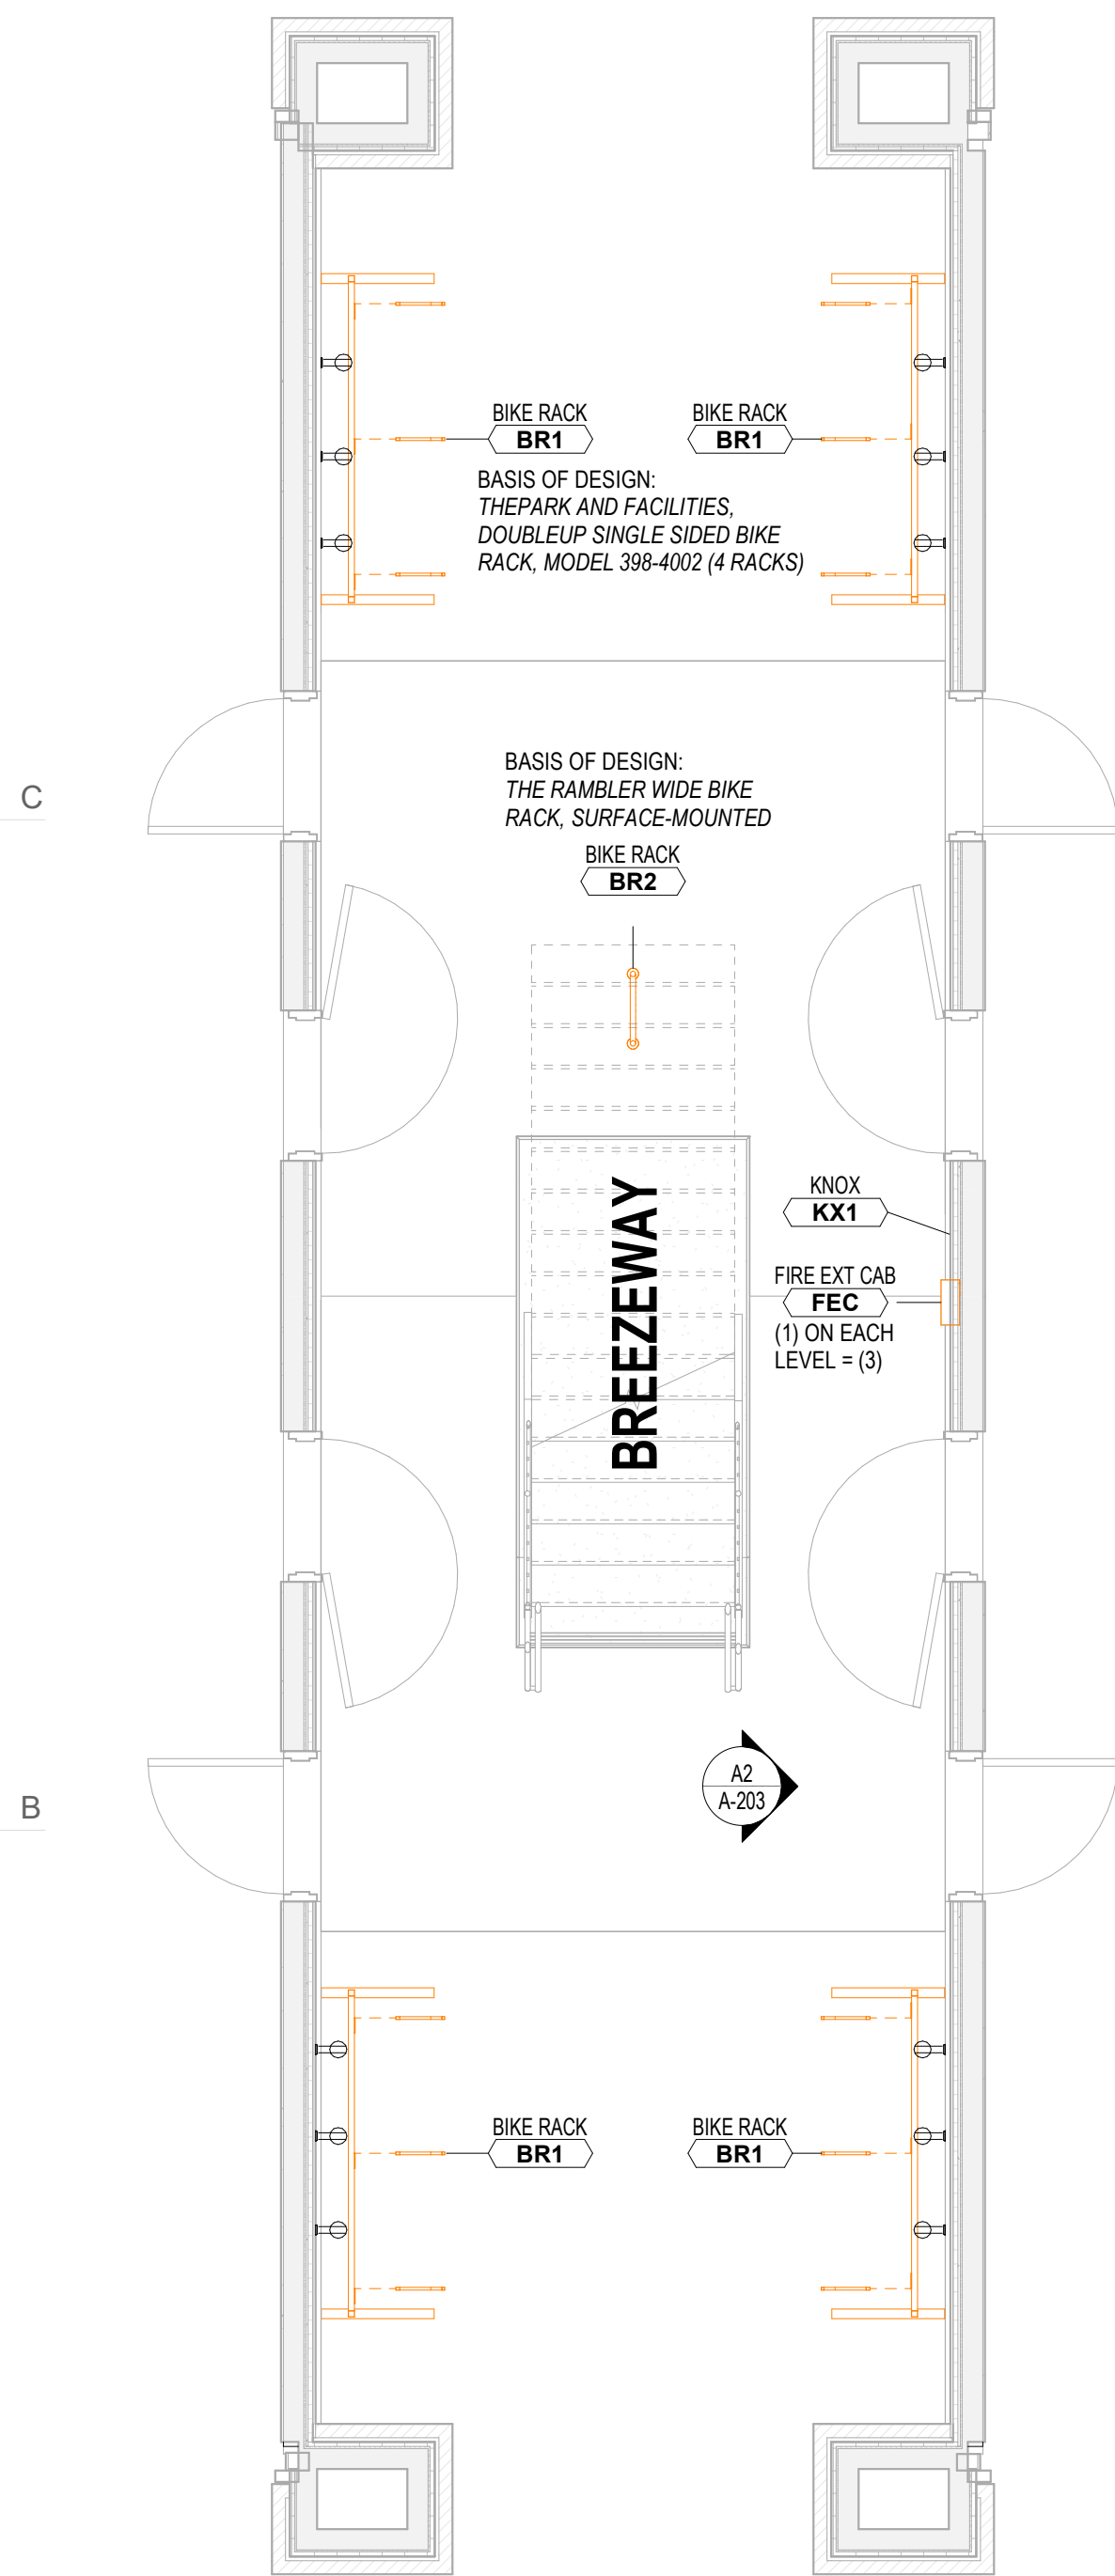

D

D6 EQUIPMENT PLAN - IDF
A-425 1/4" = 1'-0"


E

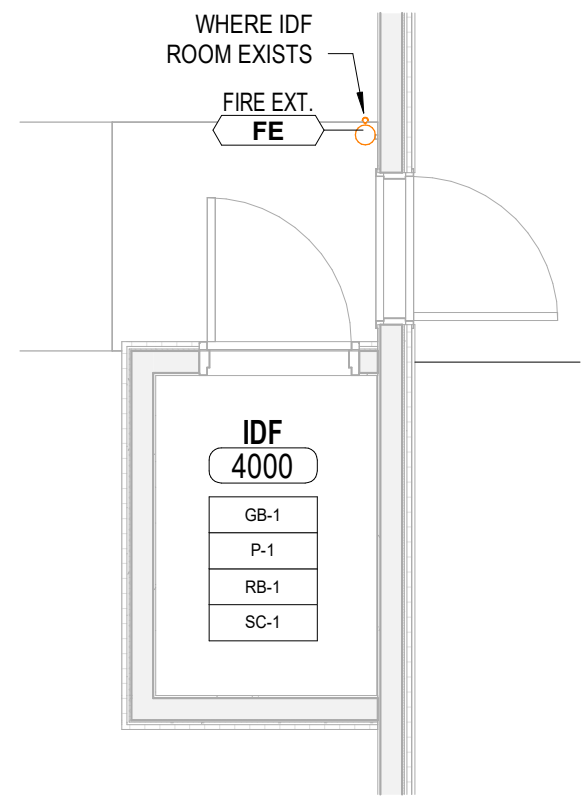


C5 EQUIPMENT PLAN - SITE
A-425 1" = 80'-0"




B5 EQUIPMENT PLAN - UNIT 2 ADA
A-425 1/4" = 1'-0"

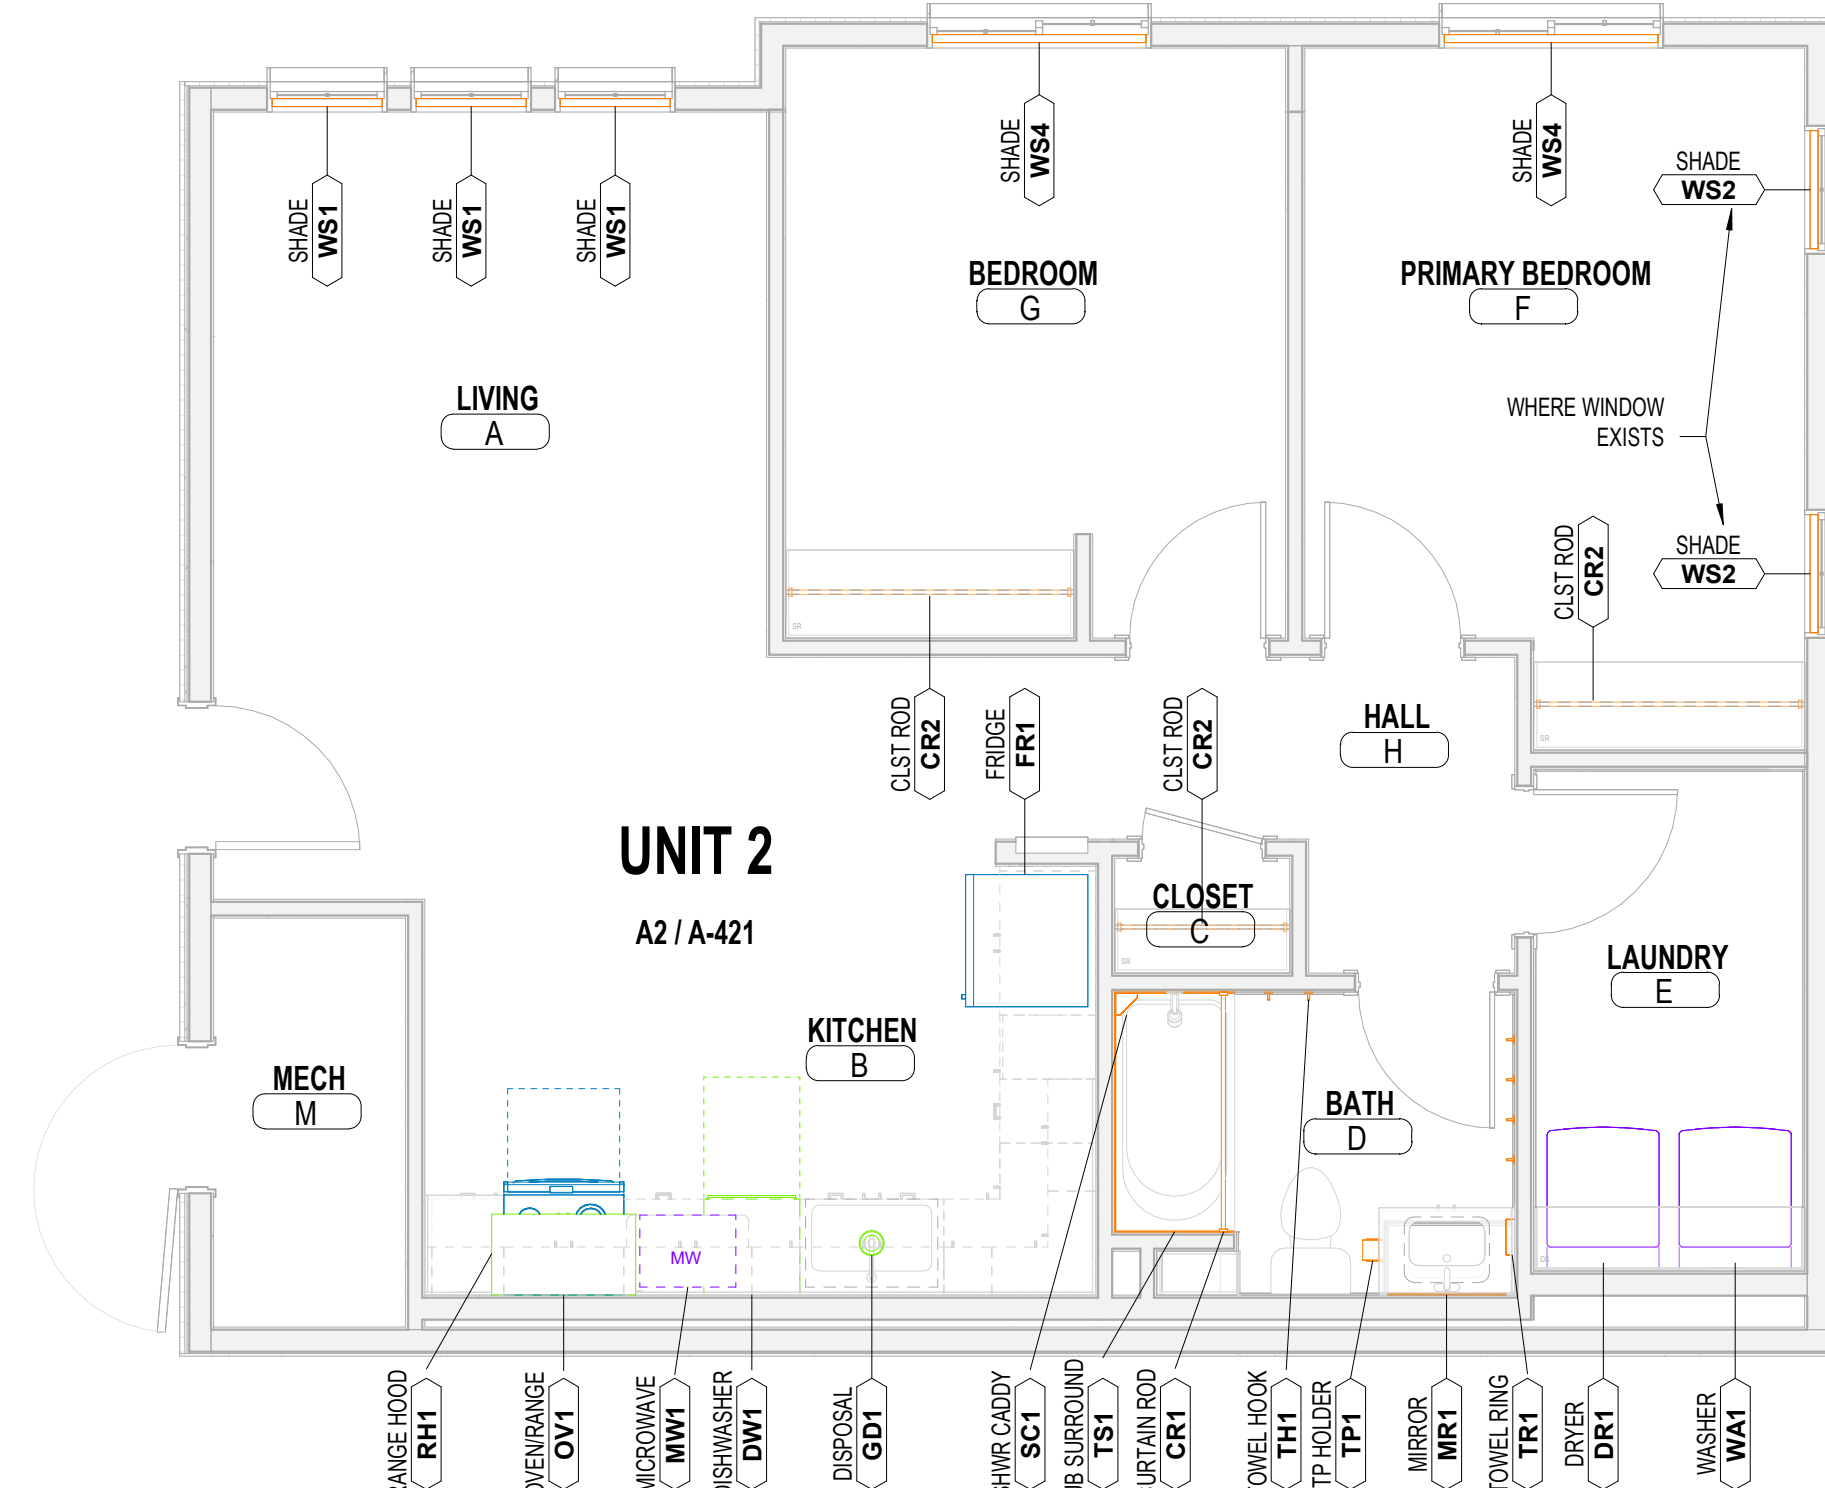


A5 EQUIPMENT PLAN - UNIT 2
A-425 1/4" = 1'-0"

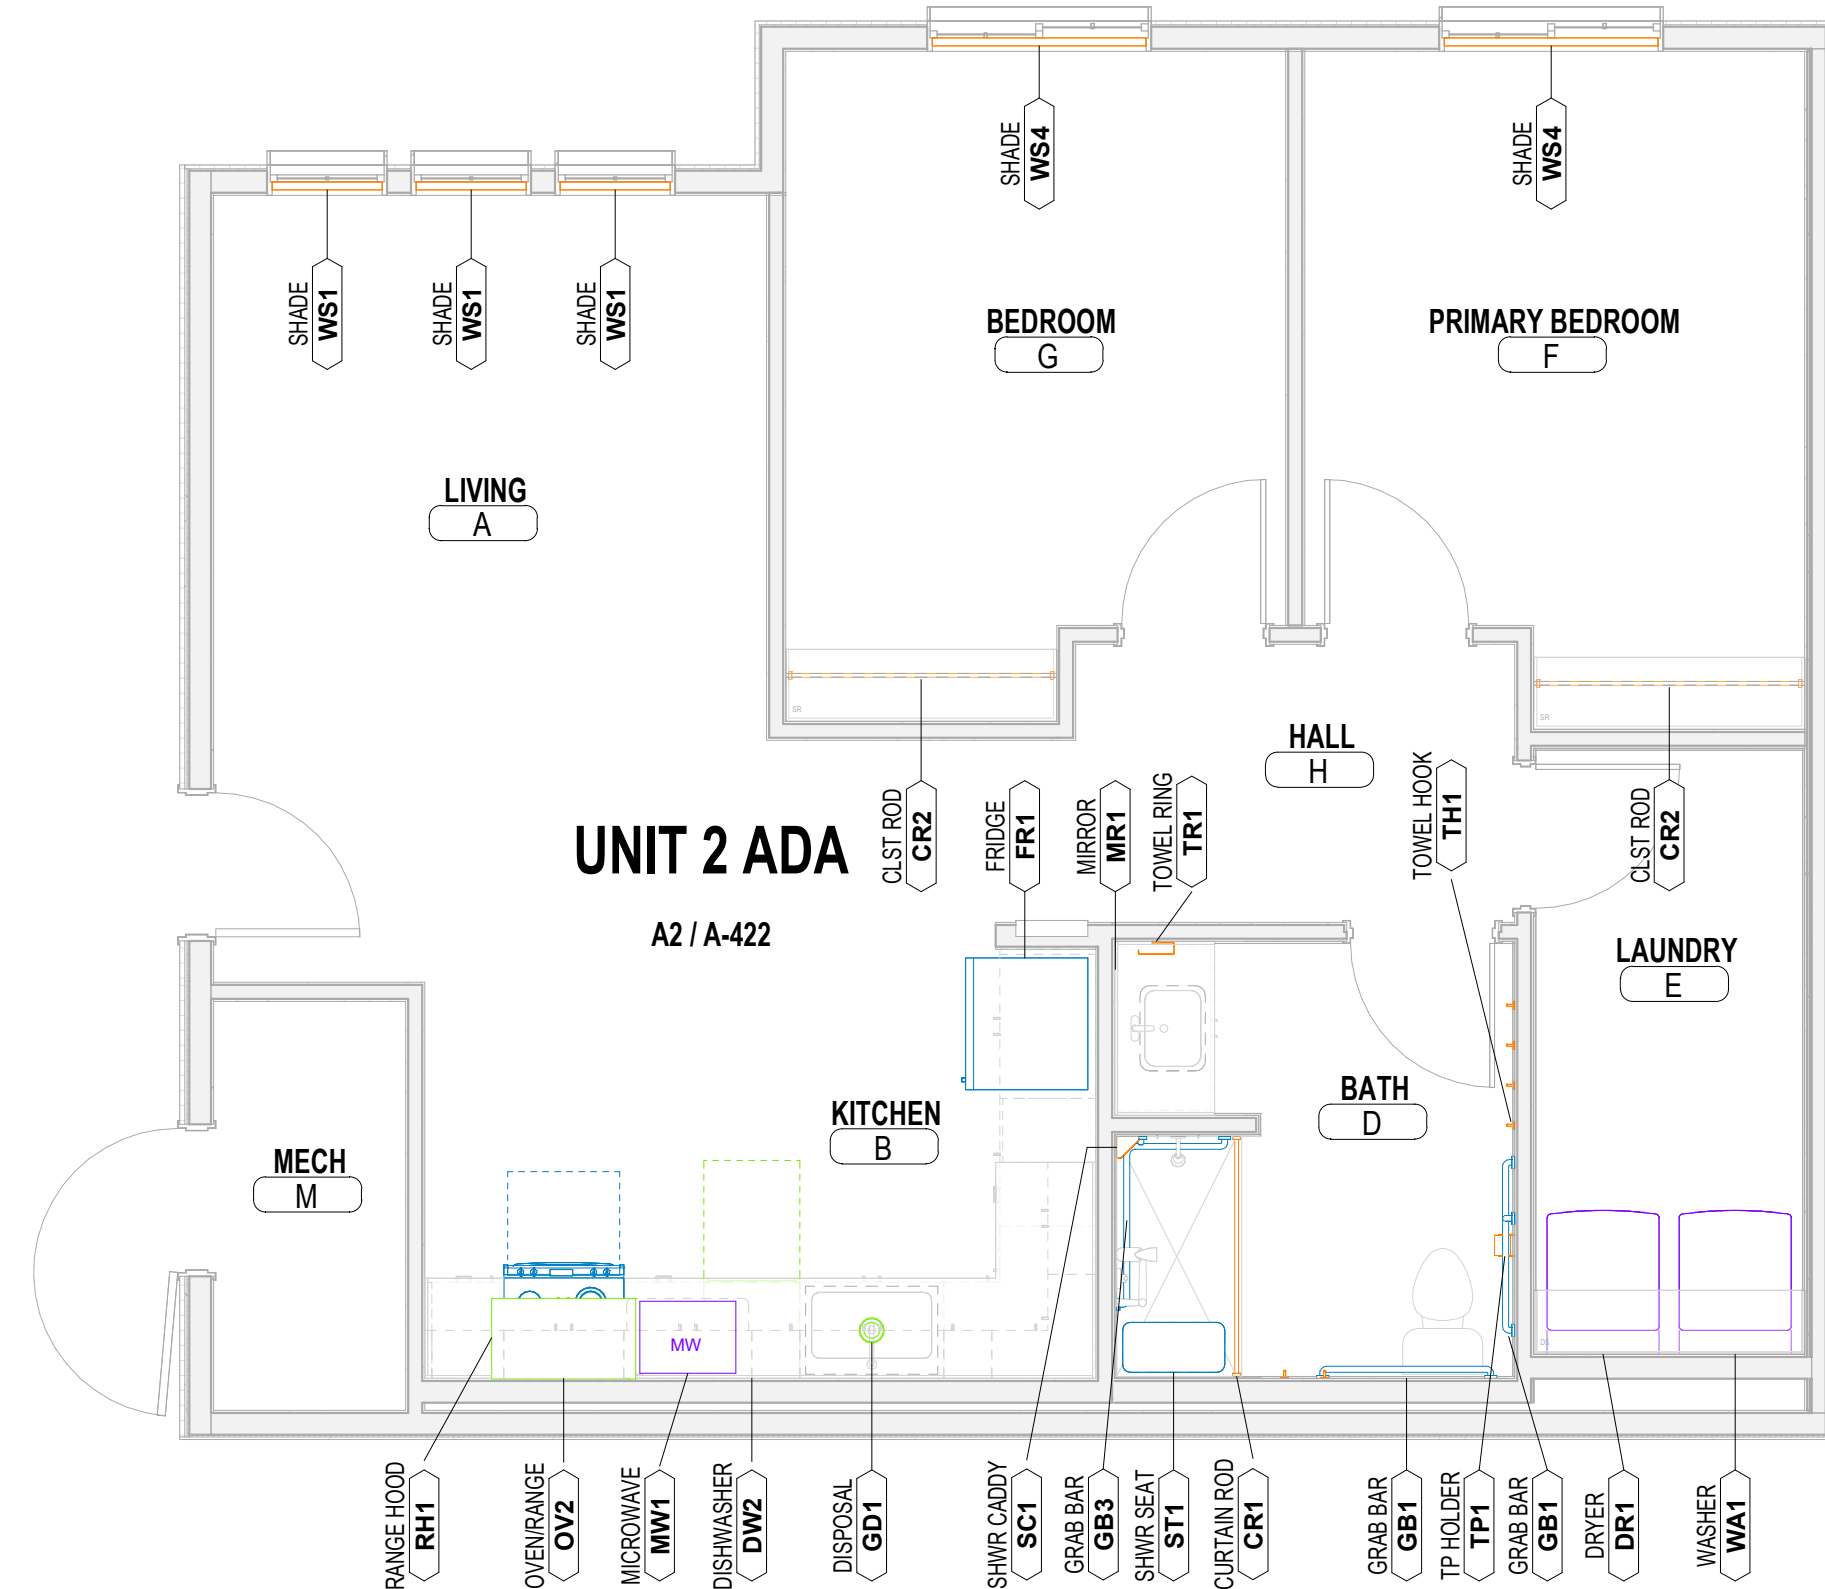

A3 EQUIPMENT PLAN - UNIT 3
A-425 1/4" = 1'-0"

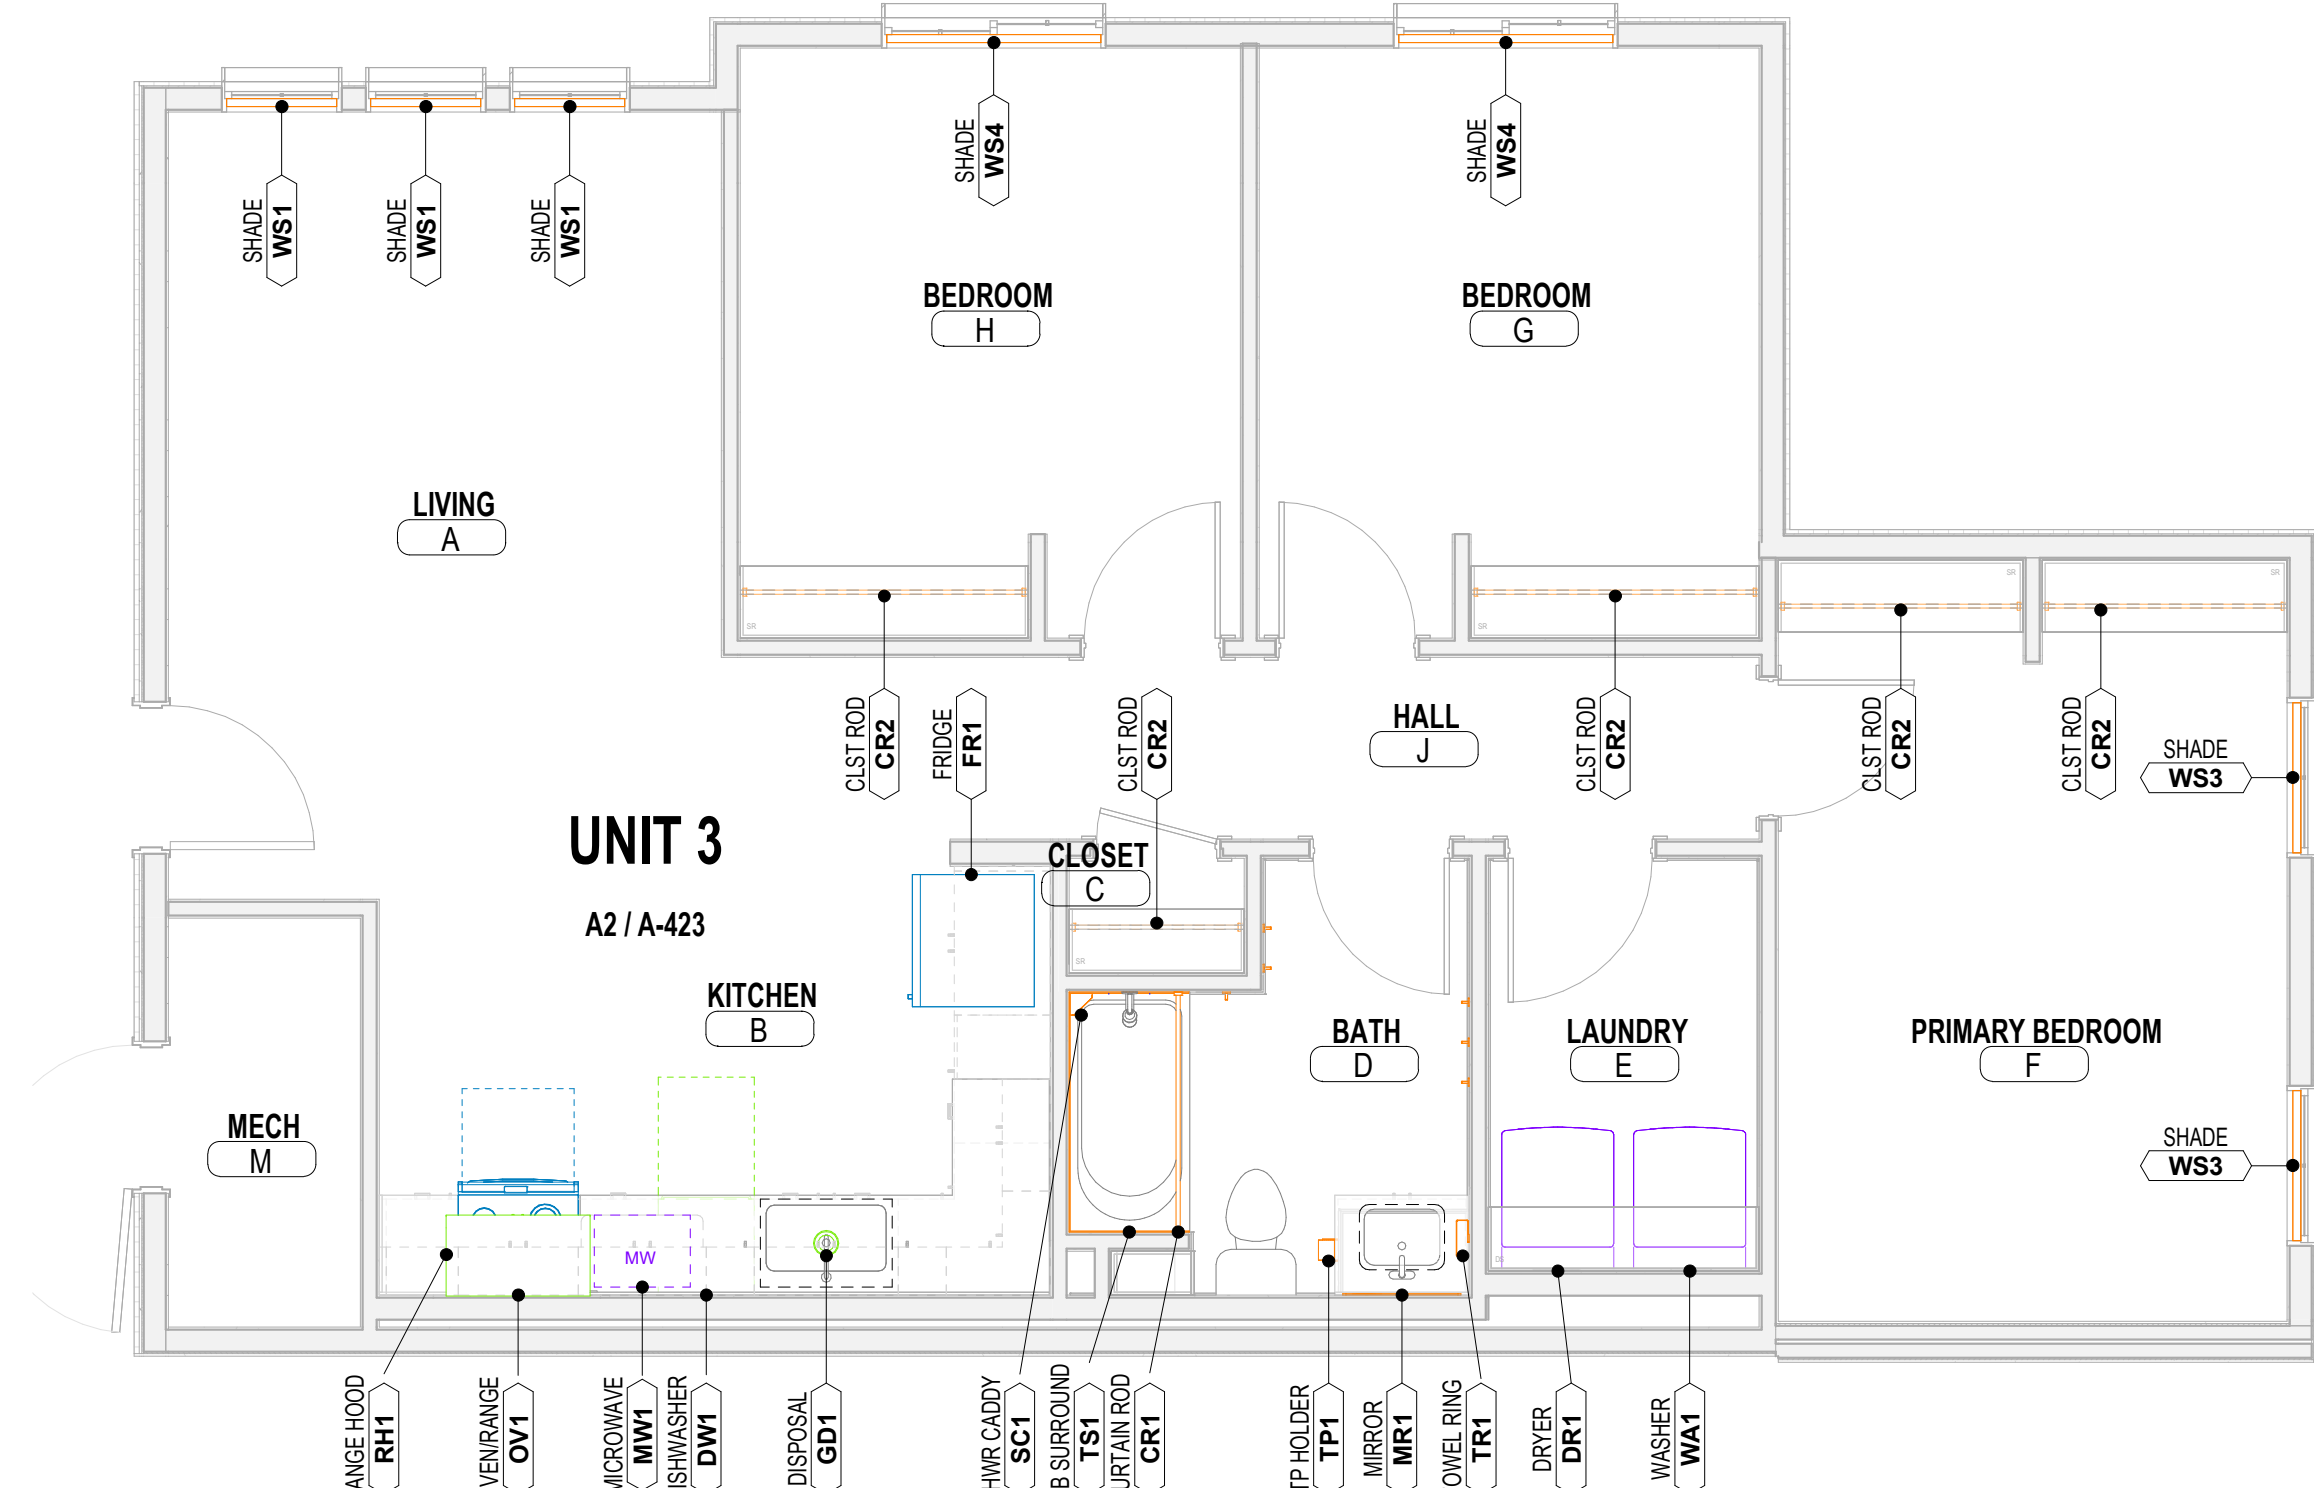


B3 EQUIPMENT PLAN - UNIT 3 ADA
A-425 1/4" = 1'-0"

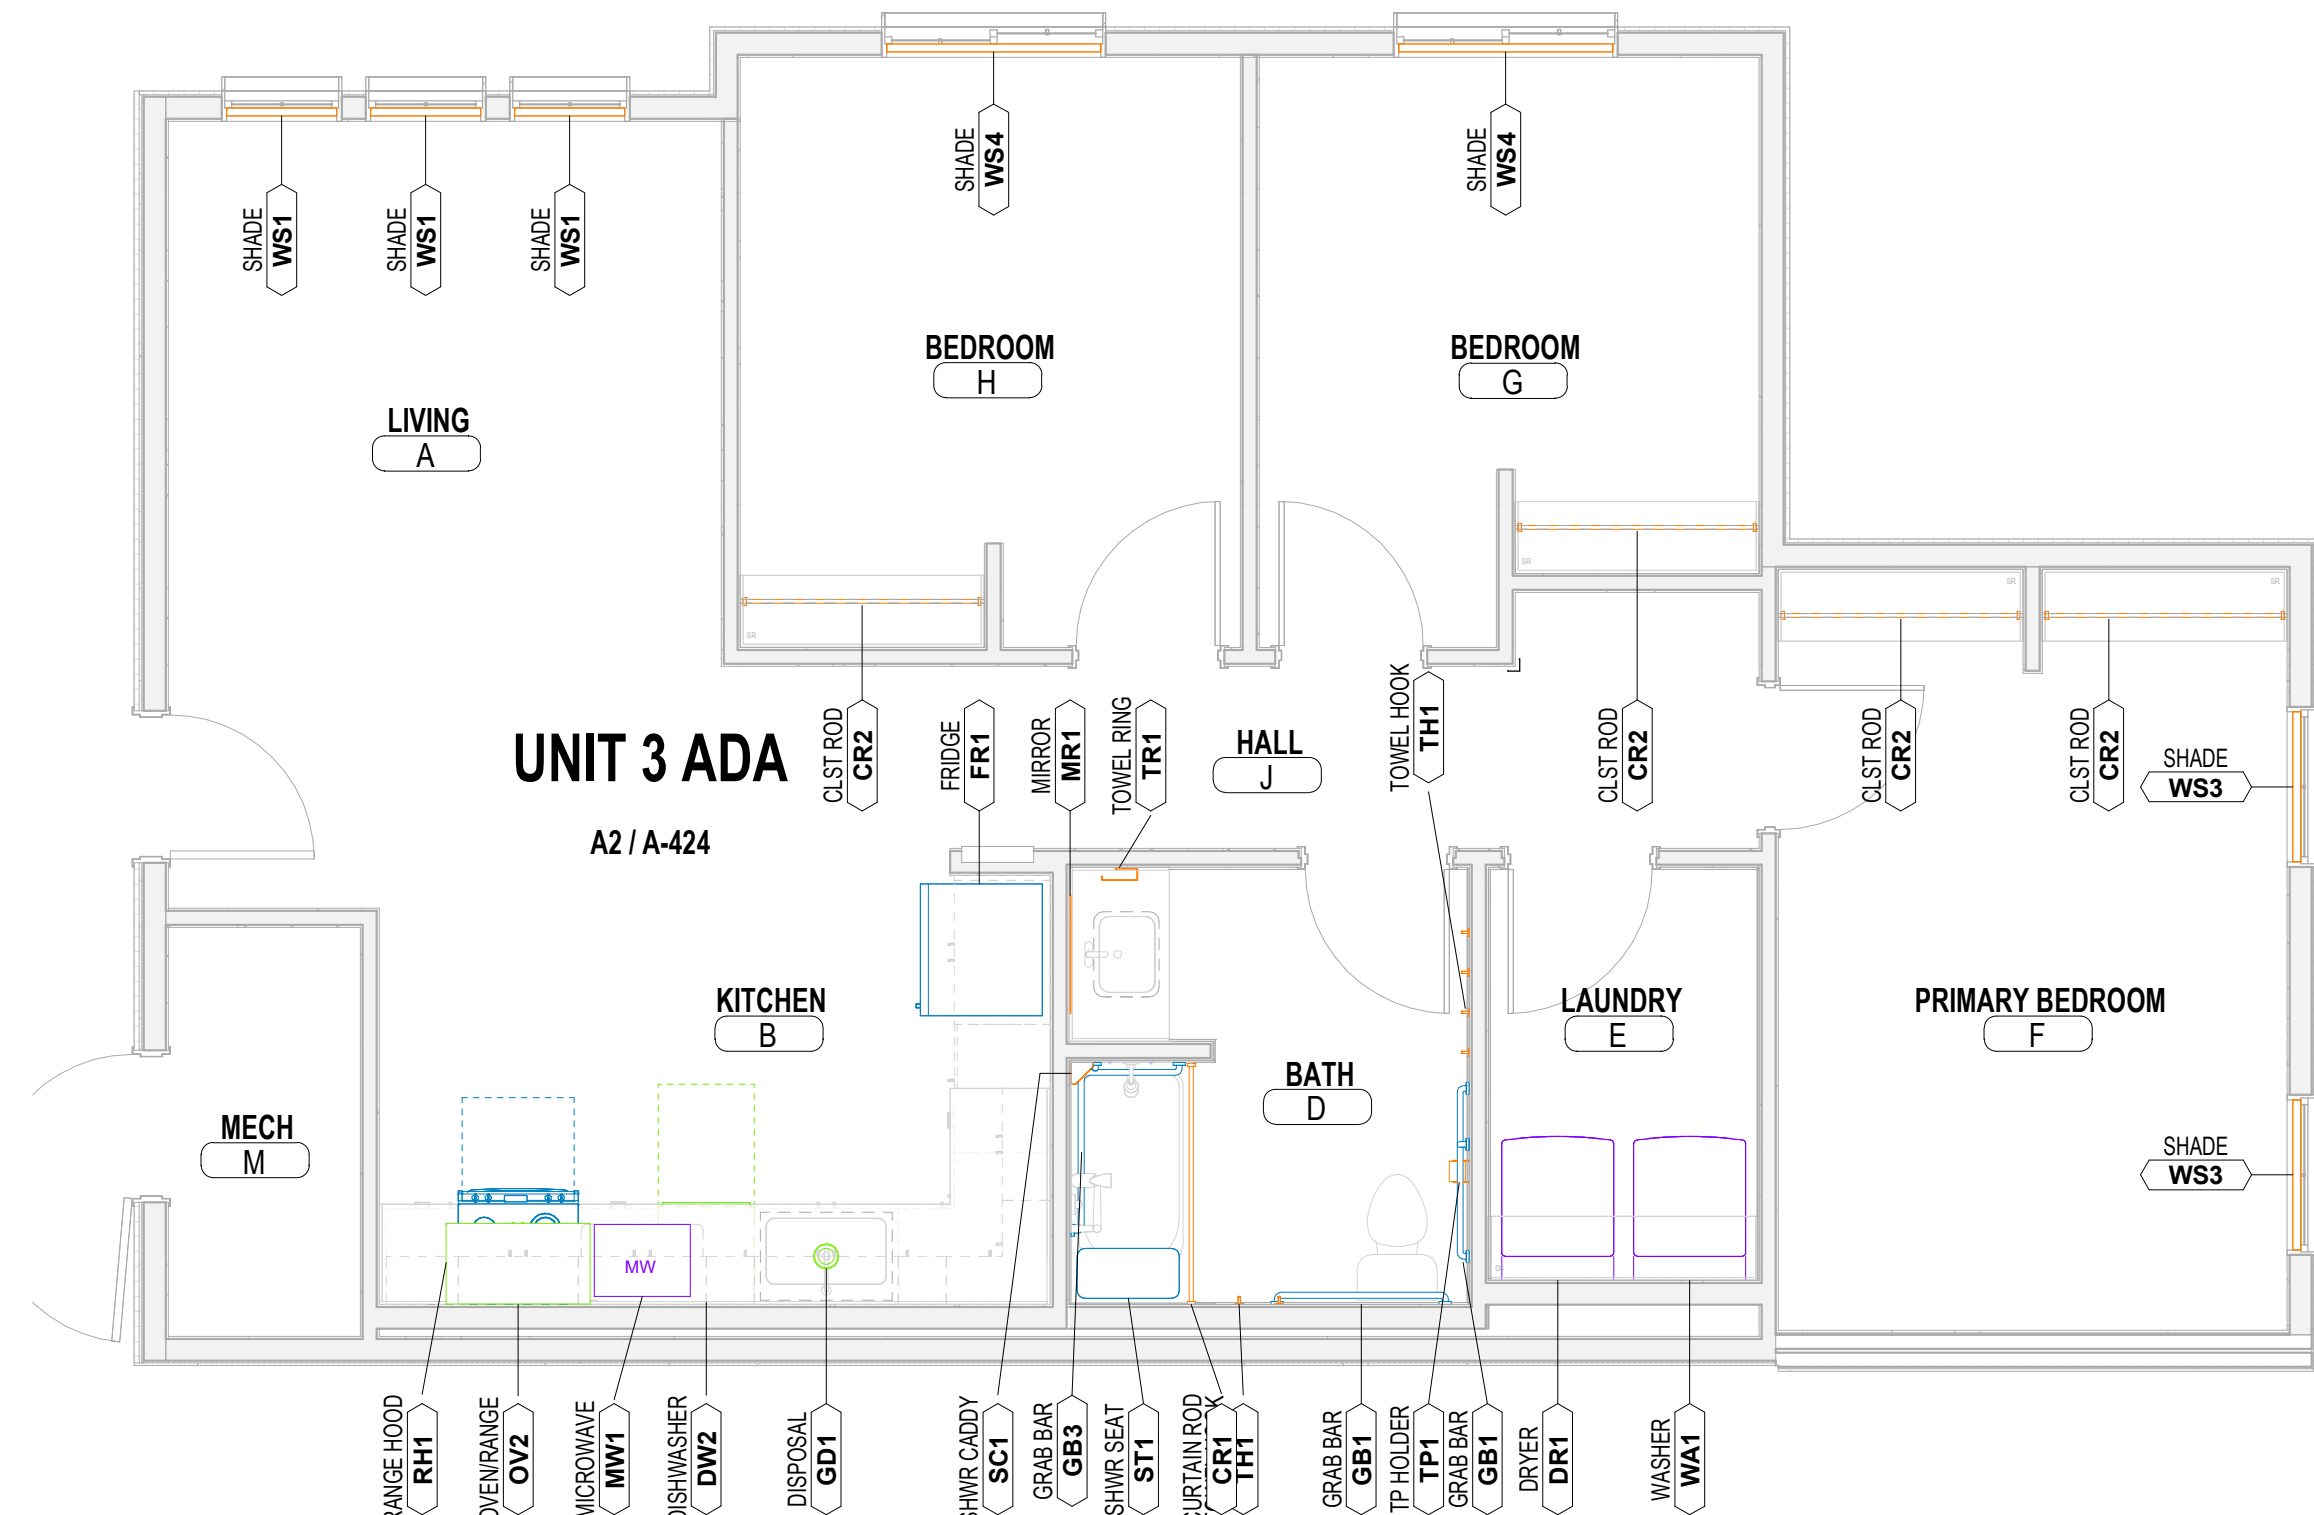

SPECIALTY EQUIPMENT SCHEDULE							
GENERAL INFORMATION				PROVISIONS			
MARK	EQUIPMENT	DESCRIPTION	COMMENTS	CFI	OFI	OFI	TENANT
BR1	BIKE RACK	HANGING BIKE RACK		X			
BR2	BIKE RACK	IN GROUND MOUNTED U-SHAPED BIKE RACK		X			
CR1	CURTAIN ROD	BASIS OF DESIGN: KOHLER EXPANSE K-9350-SN VIBRANT POLISHED NICKEL. FIXED ENDS.	SHOWER AND BATHTUB LOCATIONS. SEE INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS	X			
CR2	CLST ROD	CLOSET ROD, CHROME, FIXED ENDS		X			
DR1	DRYER	N.I.C.; TENANT PROVIDED					X
DW1	DISHWASHER	GE DISHWASHER WITH FRONT CONTROLS, WHITE, GDF450PGRWW			X		
DW2	DISHWASHER	GE DISHWASHER WITH HIDDEN CONTROLS, ADA COMPLIANT, WHITE, GDT225SGLWW			X		
FE	FIRE EXT.	CLASS A-B-C; SURFACE MOUNT		X			
FEC	FIRE EXT CAB	CLASS A-B-C; SEMI-RECESSED CABINET		X			
FR1	FRIDGE	GE 21.9 CU.FT. TOP-FREEZER REFRIGERATOR, WHITE, GTS22KGNWW					X
GB1	GRAB BAR	GRAB BAR, 42". CONTRACTOR TO PROVIDE BACKING					X
GB2	GRAB BAR	GRAB BAR, 24". CONTRACTOR TO PROVIDE BACKING					X
GB3	GRAB BAR	GRAB BAR TRANSFER SHOWER, CONTRACTOR TO PROVIDE BACKING					X
GD1	DISPOSAL	3/4 HP STANDARD SERIES	WALL SWITCH		X		
KX1	KNOX	KNOX BOX		X			
MB1	MAILBOX	MAILBOX, 16 MAIL & 2 PACKAGES PER UNIT			X		
MR1	MIRROR	28"W X 36"H FRAMELESS, CAULKED EDGE		X			
MW1	MICROWAVE	N.I.C.; TENANT PROVIDED					X
OV1	OVEN/RANGE	GE 30"W x 36"H FREE-STANDING ELECTRIC RANGE, WHITE, JB256DMWW					X
OV2	OVEN/RANGE	GE 30"W x 34"H FREE-STANDING ELECTRIC RANGE, ADA COMPLIANT, WHITE					X
RH1	RANGE HOOD	GE STANDARD RANGE HOOD, WHITE, JN327HWW			X		
SC1	SHWR CADDY	BASIS OF DESIGN: BCI SURROUND, FOUR SHELF CADDY		X			
ST1	SHWR SEAT	SHOWER OR TUB SEAT				X	
TH1	TOWEL HOOK	BASIS OF DESIGN: KOHLER PARALLEL K-23529-CP POLISHED CHROME.	MOUNTING HEIGHT: 48" AFF	X			
TP1	TP HOLDER	BASIS OF DESIGN: KOHLER PARALLEL K-23528-CP POLISHED CHROME.	MOUNTING HEIGHT: 30" AFF	X			
TR1	TOWEL RING	BASIS OF DESIGN: KOHLER TONE K-27428-CP POLISHED CHROME.	MOUNTING HEIGHT: 24" ABOVE COUNTERTOP	X			
TS1	TUB SURROUND	CUT TO FIT ABS SURROUND, TUB TO CEILING. (NO FIBERGLASS)		X			
WA1	WASHER	N.I.C.; TENANT PROVIDED	ALWAYS ON LEFT				X
WS1	SHADE	WINDOW SHADE, ~2'-3 1/2"W		X			
WS2	SHADE	WINDOW SHADE, ~2'-5 1/2"W		X			
WS3	SHADE	WINDOW SHADE, ~3'-1 1/2"W		X			
WS4	SHADE	WINDOW SHADE, ~4'-5 1/2"W		X			



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

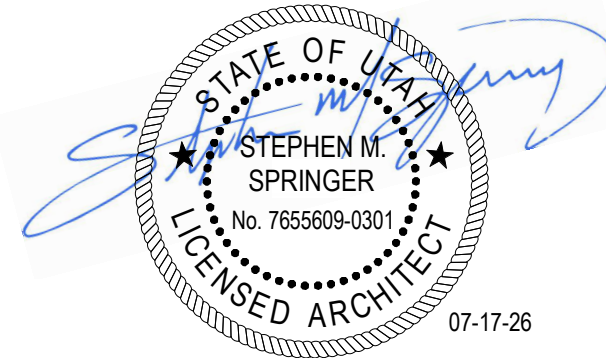

07-17-26

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604


Date Revision

BP3 - 100% CD SET


NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

EQUIPMENT PLANS & SCHEDULE


A-425

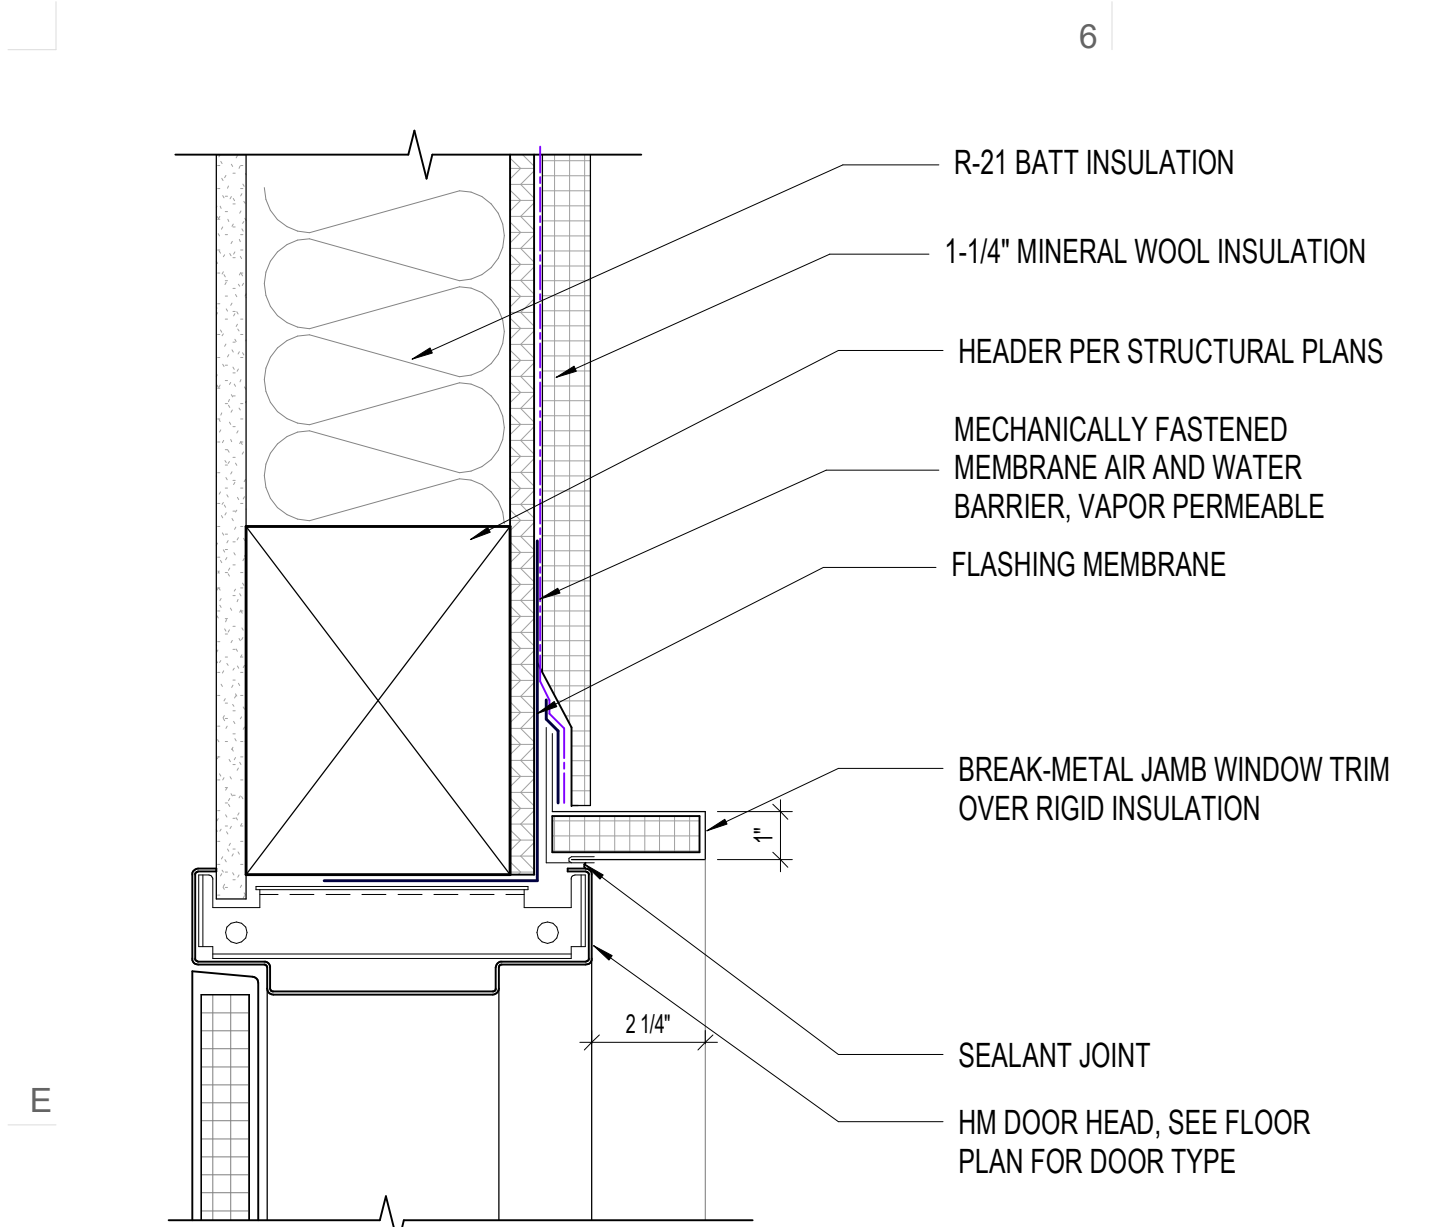


D5 EXTERIOR HM DOOR HEAD @ HORIZONTAL SIDING
A-602 3" = 1'-0"

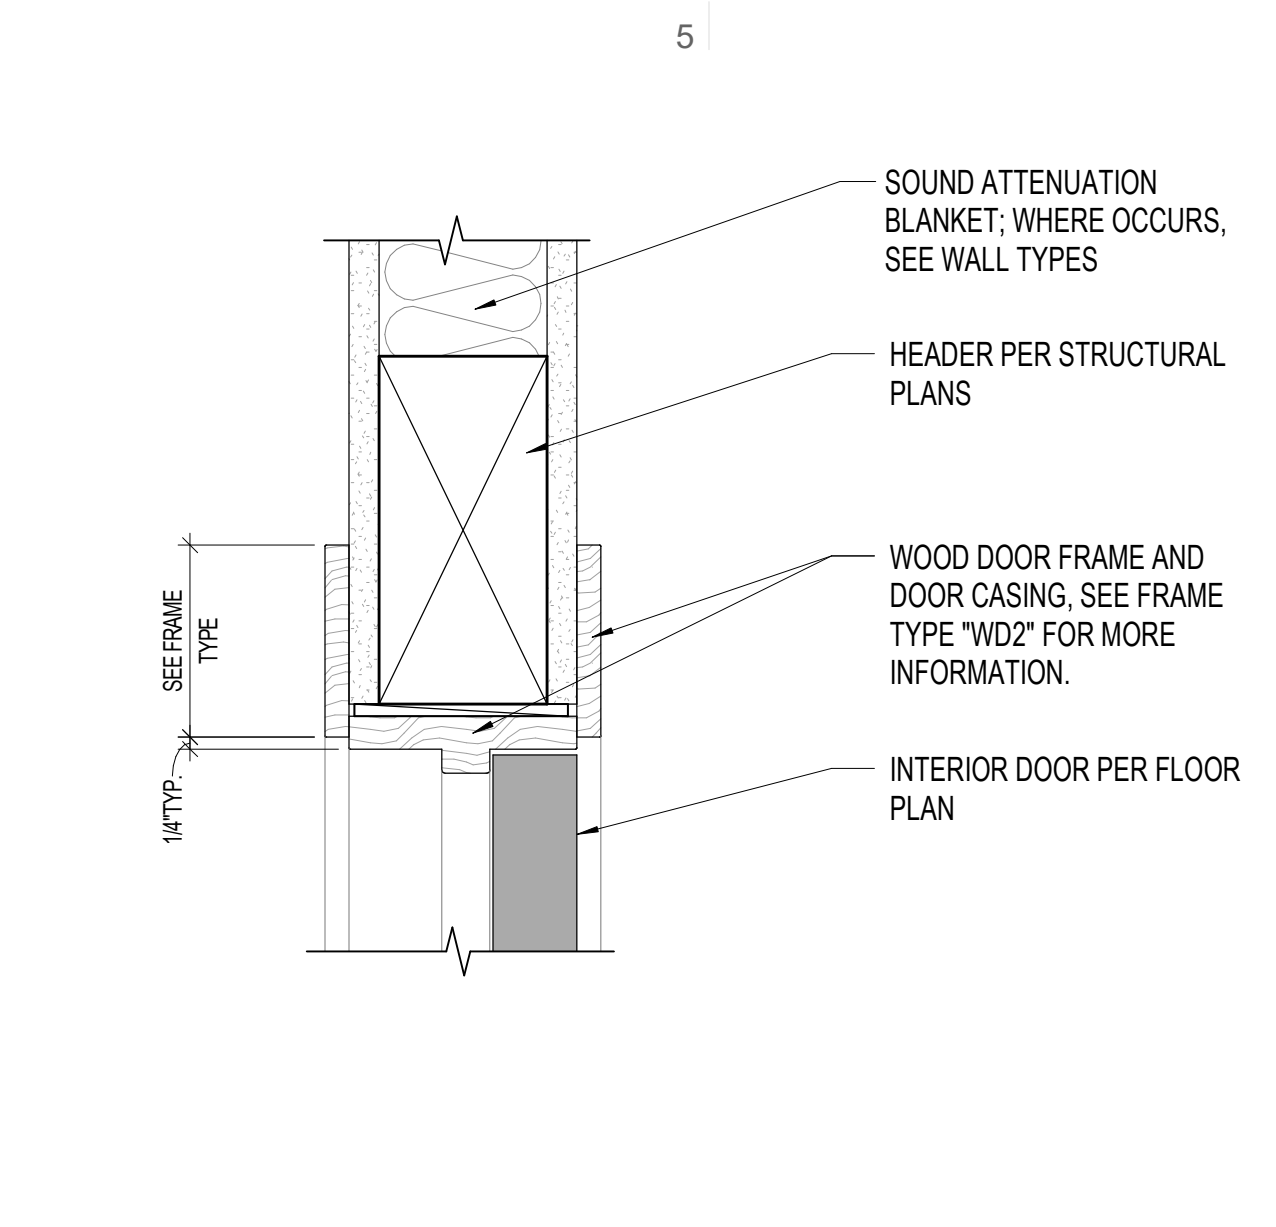


D4 INTERIOR DOOR HEAD
A-602 3" = 1'-0"

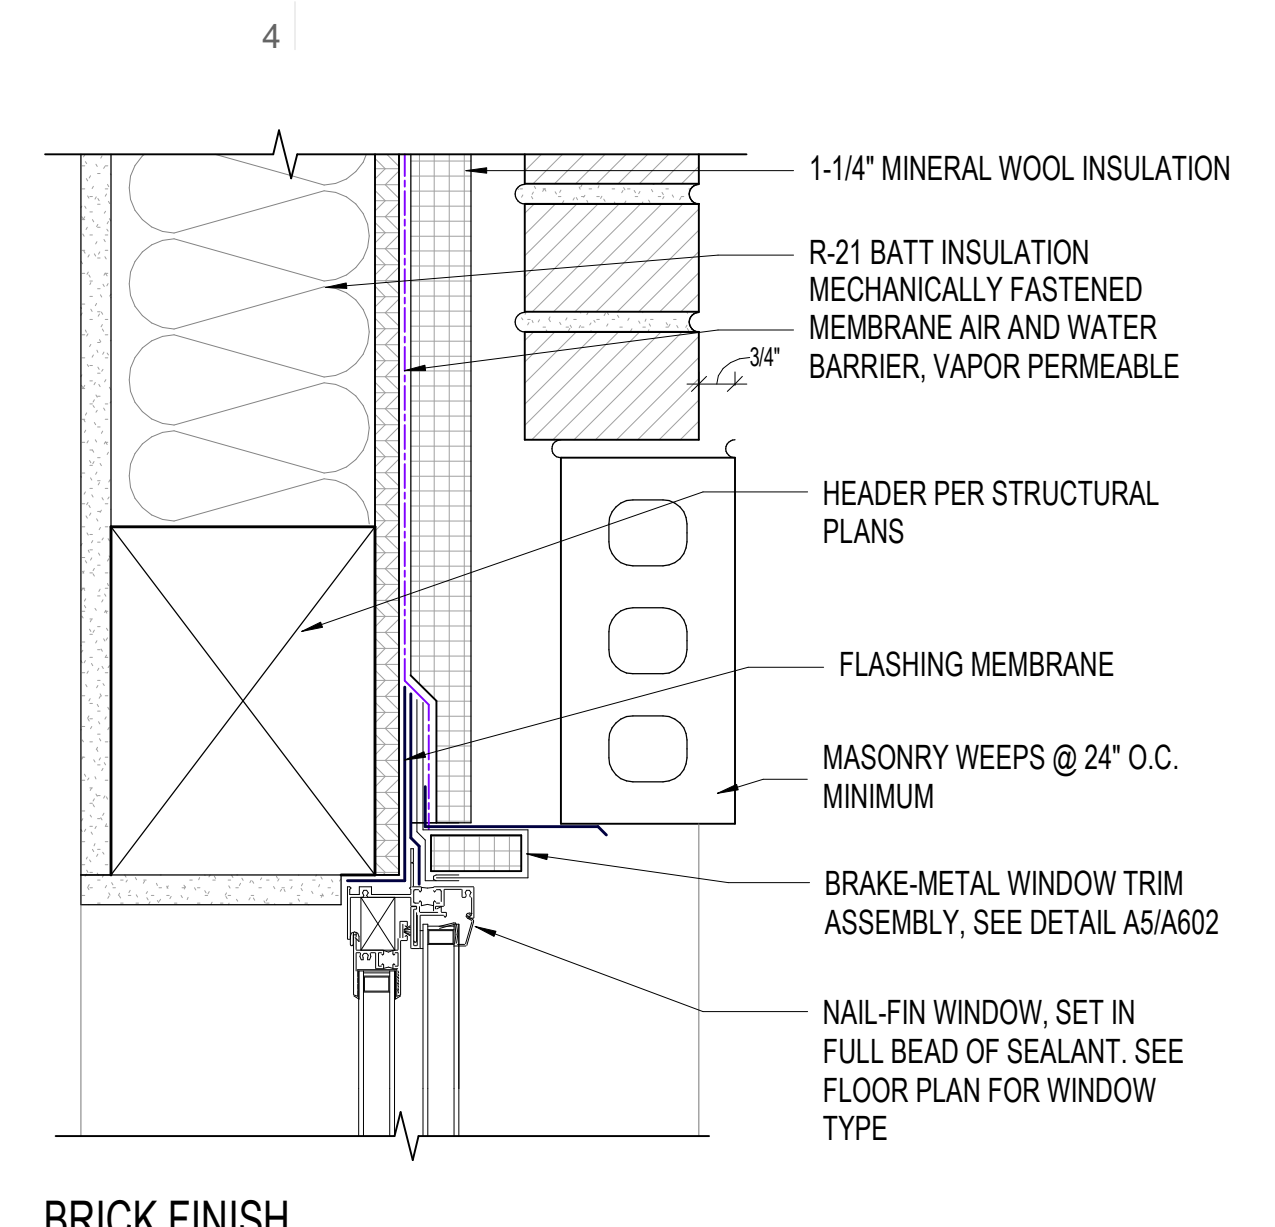


D3 EXTERIOR WINDOW HEAD
A-602 3" = 1'-0"

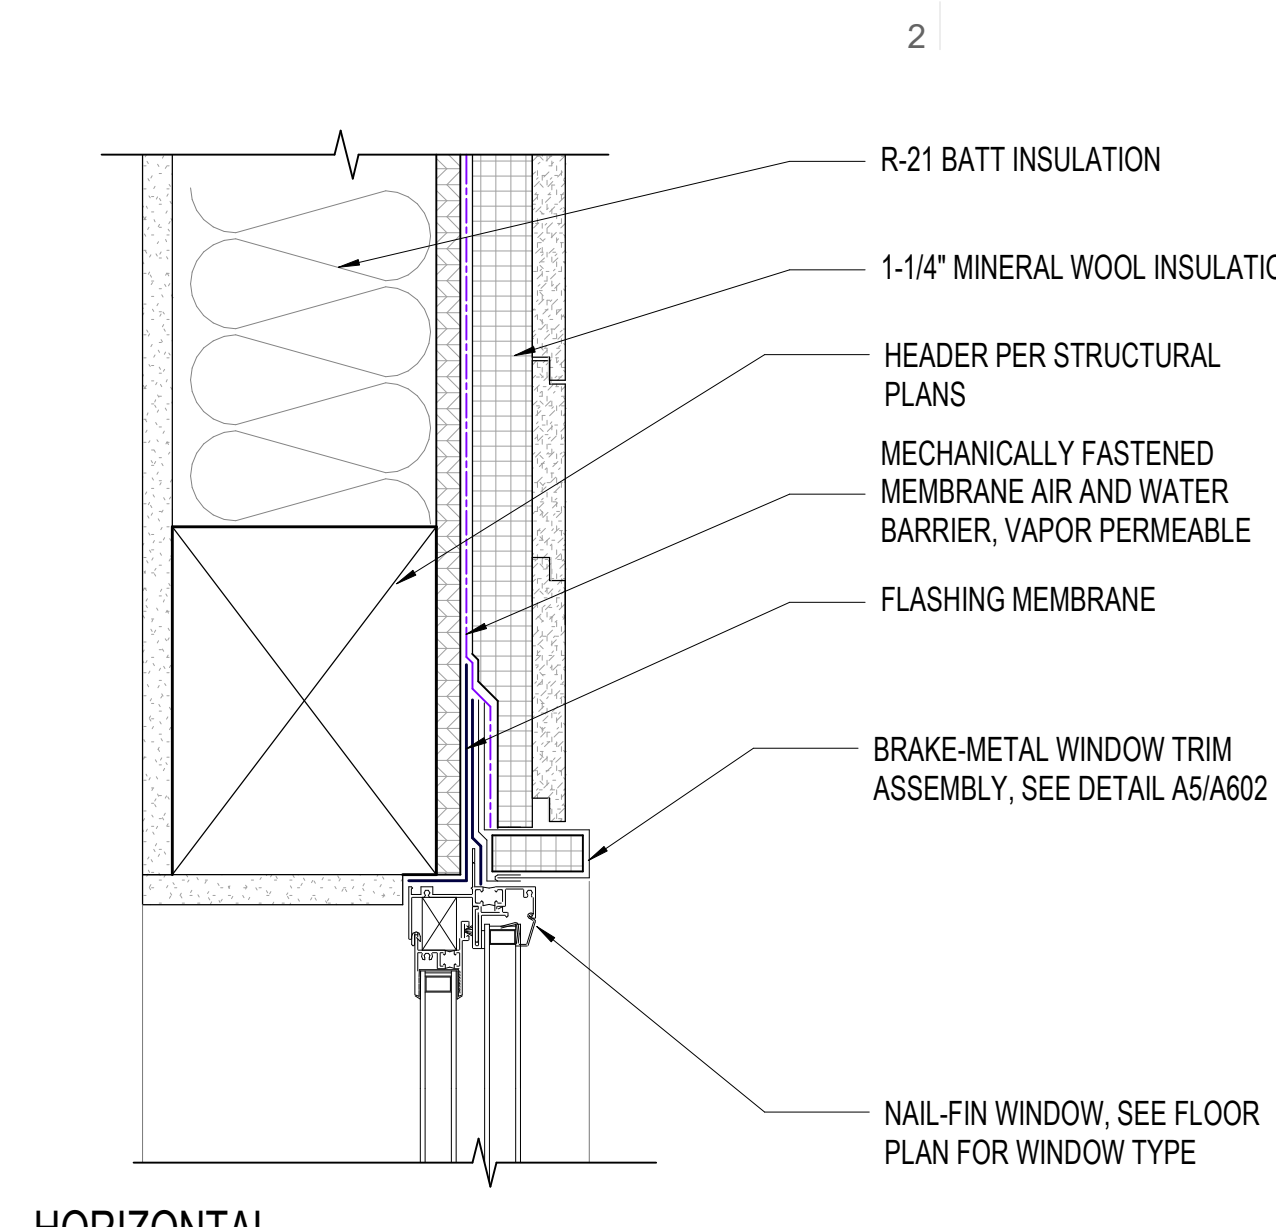


HORIZONTAL SIDING

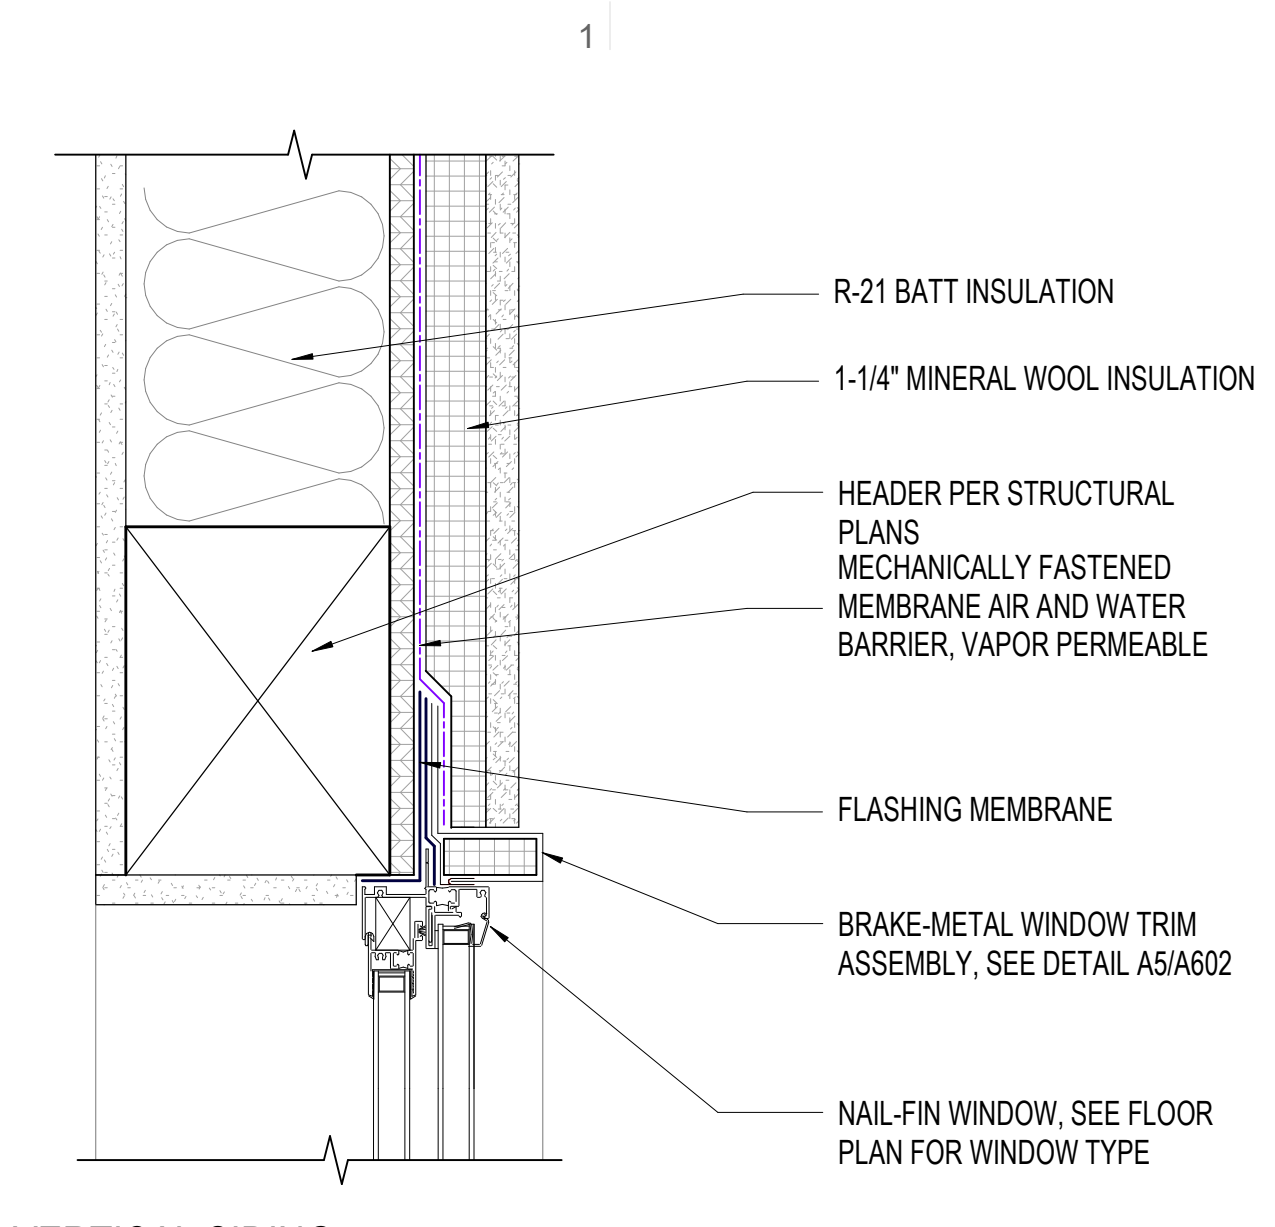


VERTICAL SIDING

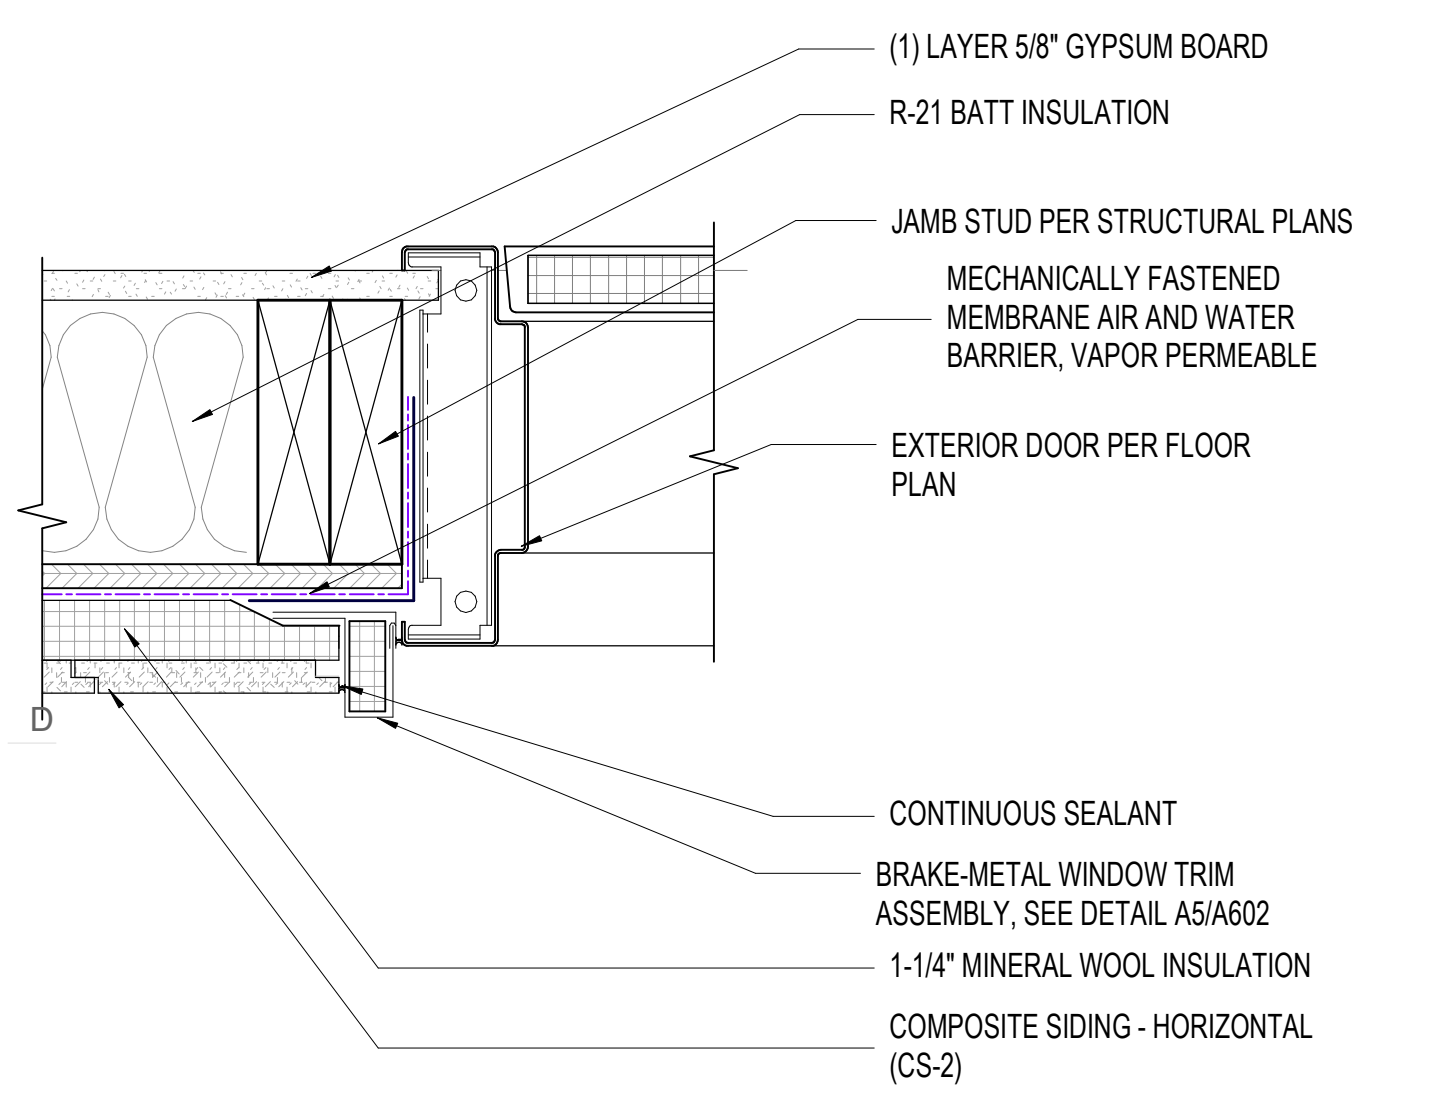


C5 EXTERIOR HM DOOR JAMB @ HORIZONTAL SIDING
A-602 3" = 1'-0"

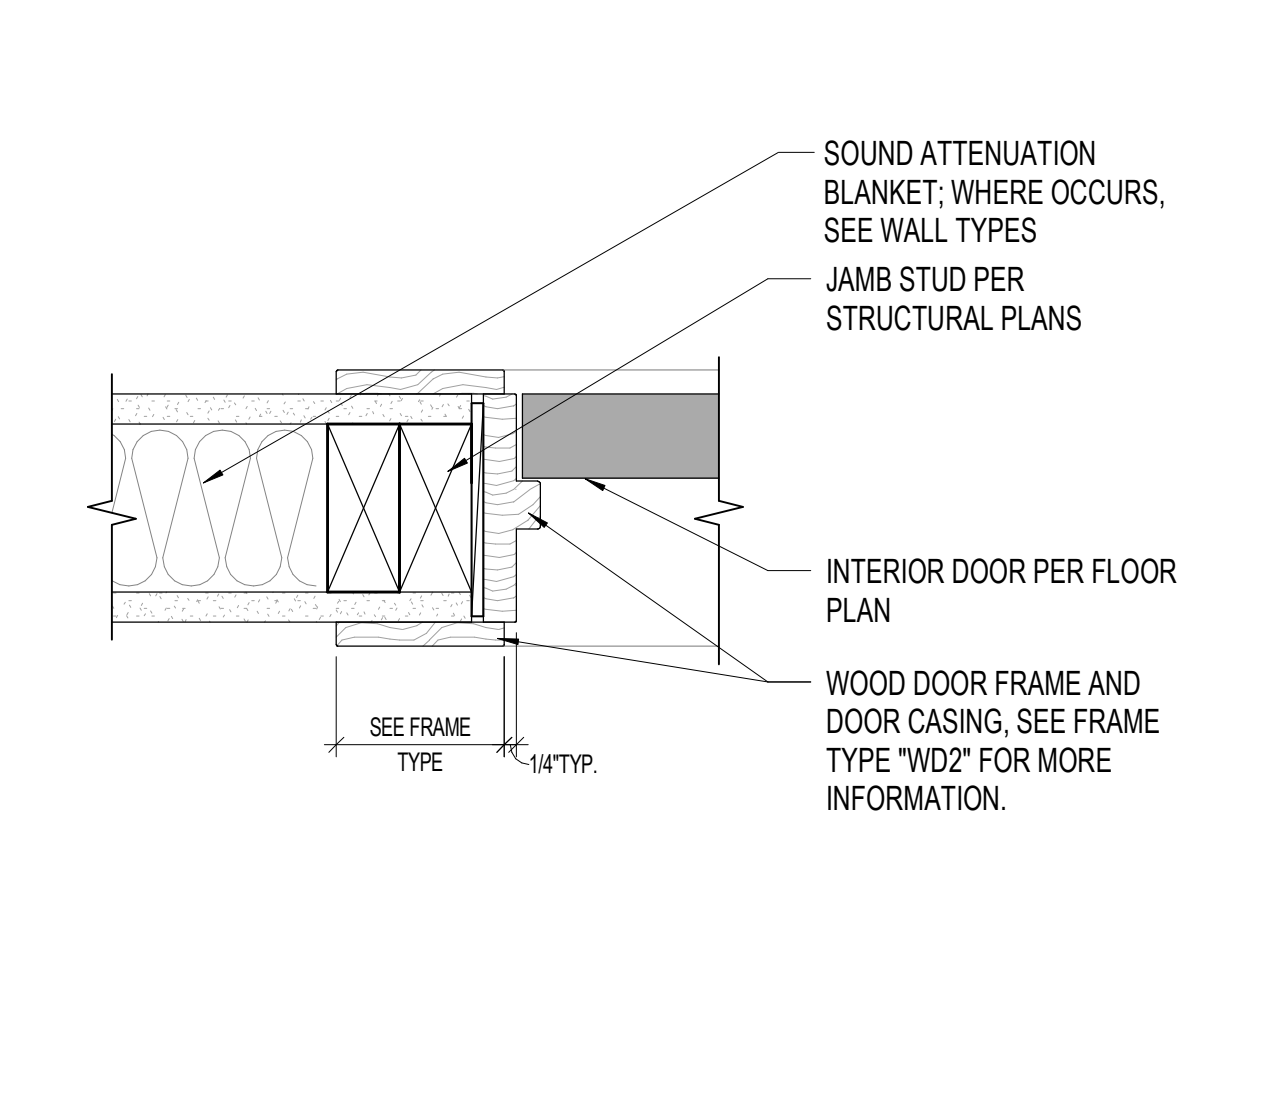


C4 INTERIOR DOOR JAMB
A-602 3" = 1'-0"

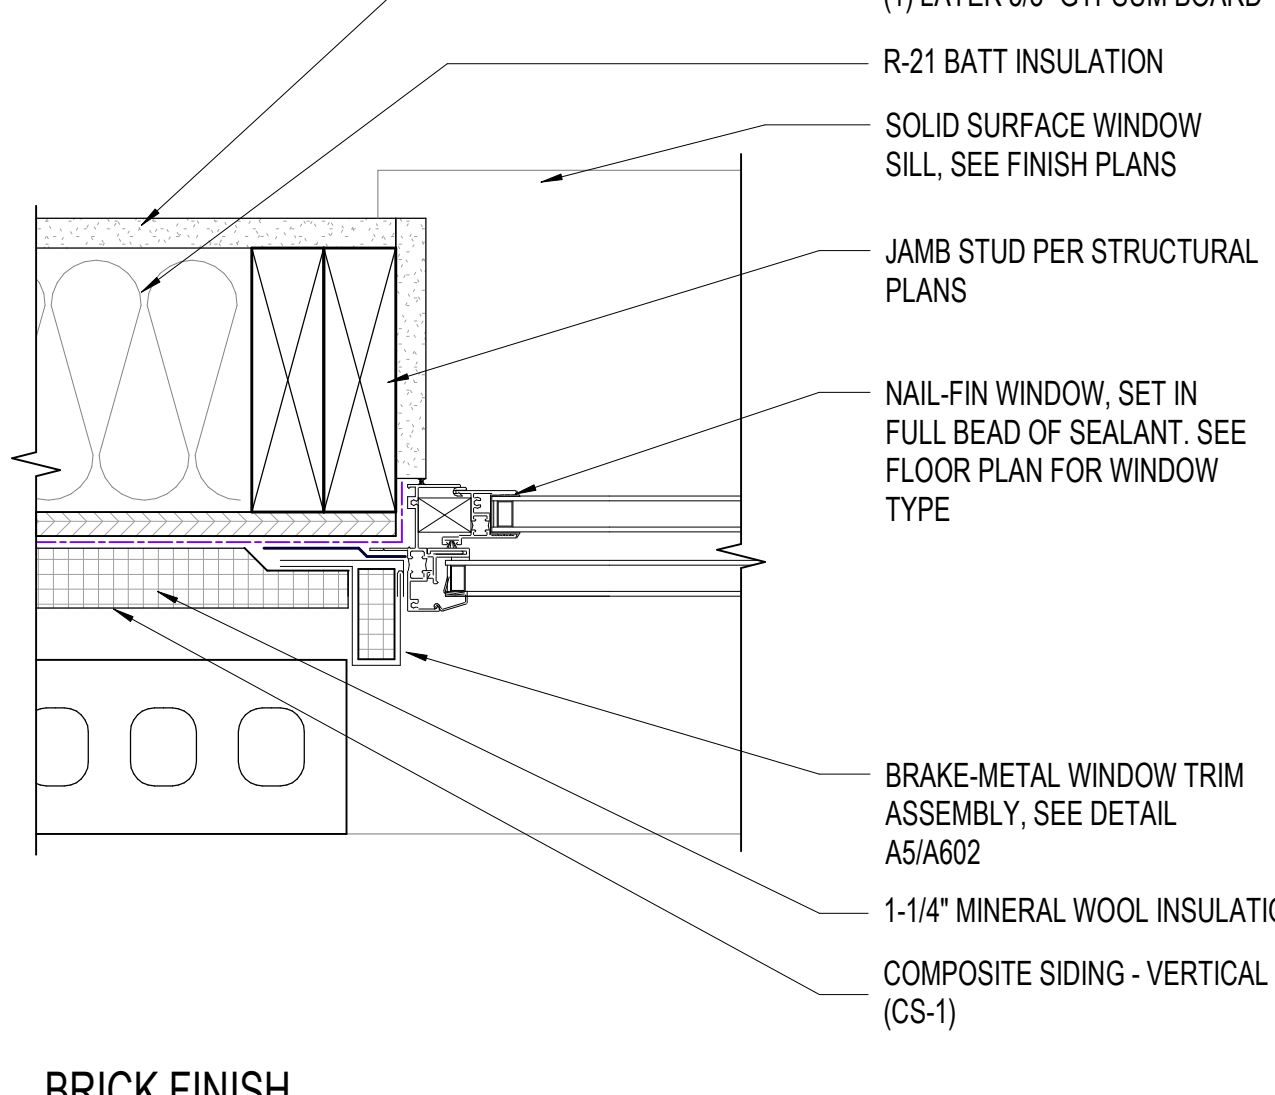


C3 EXTERIOR WINDOW JAMB
A-602 3" = 1'-0"

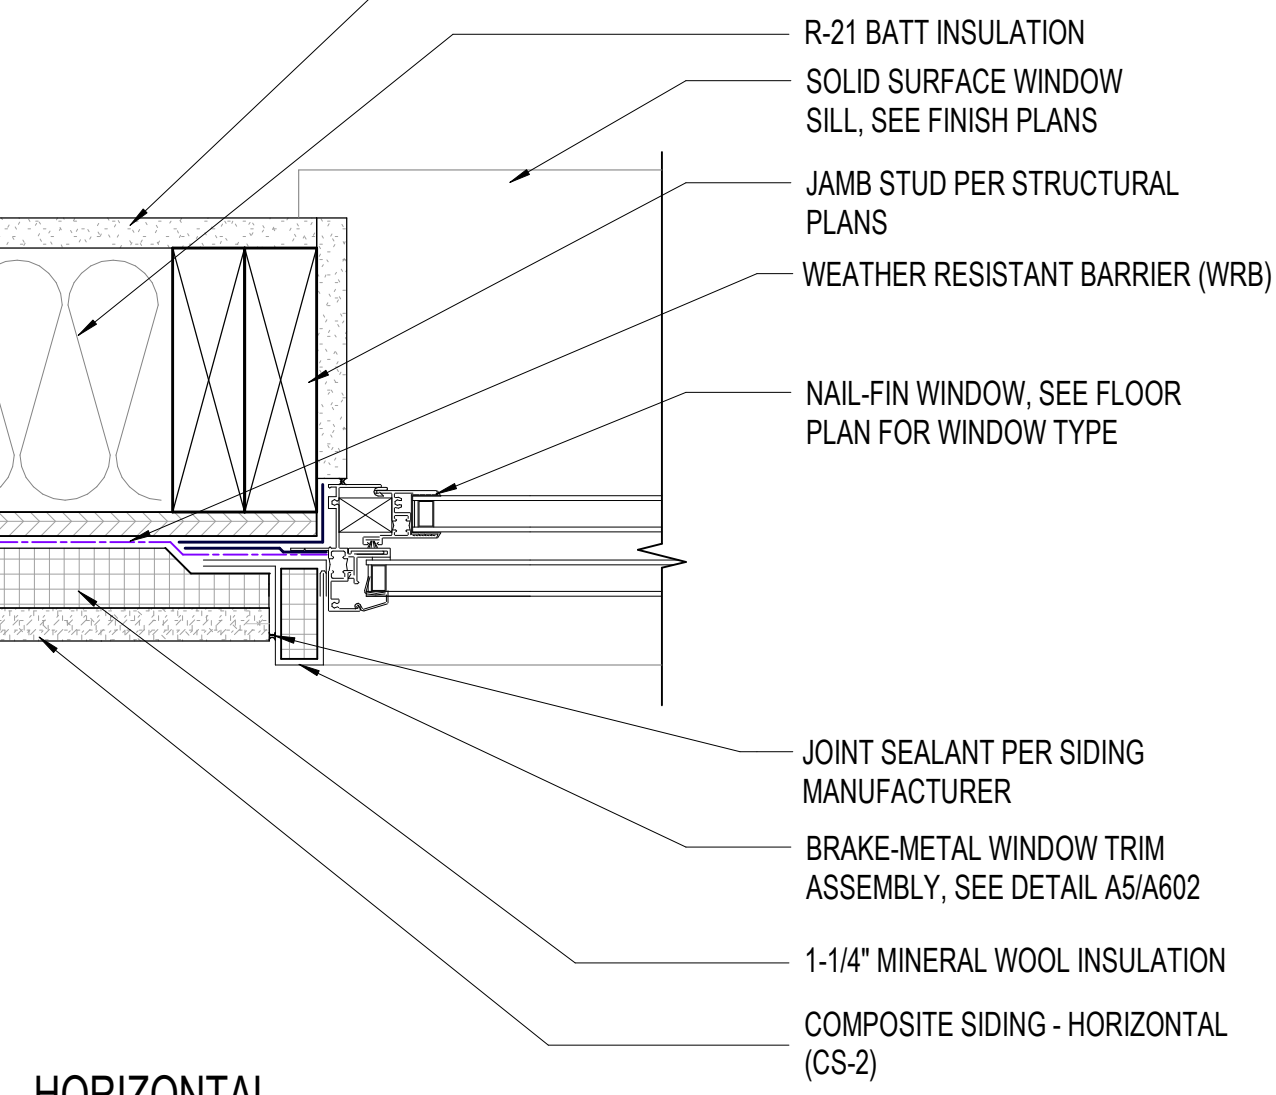


HORIZONTAL SIDING

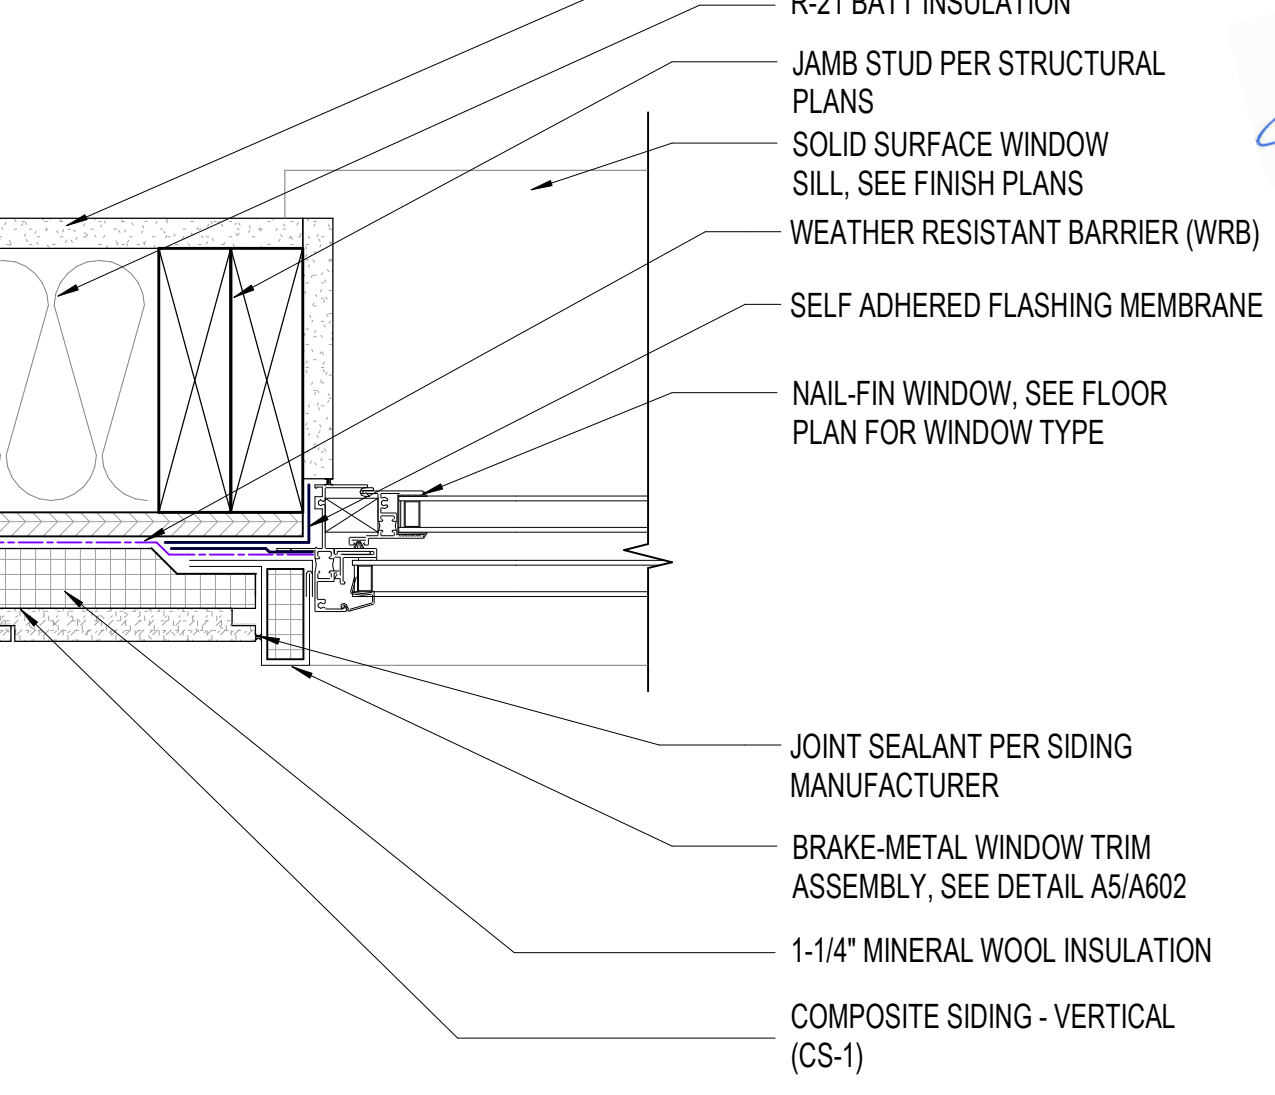


VERTICAL SIDING

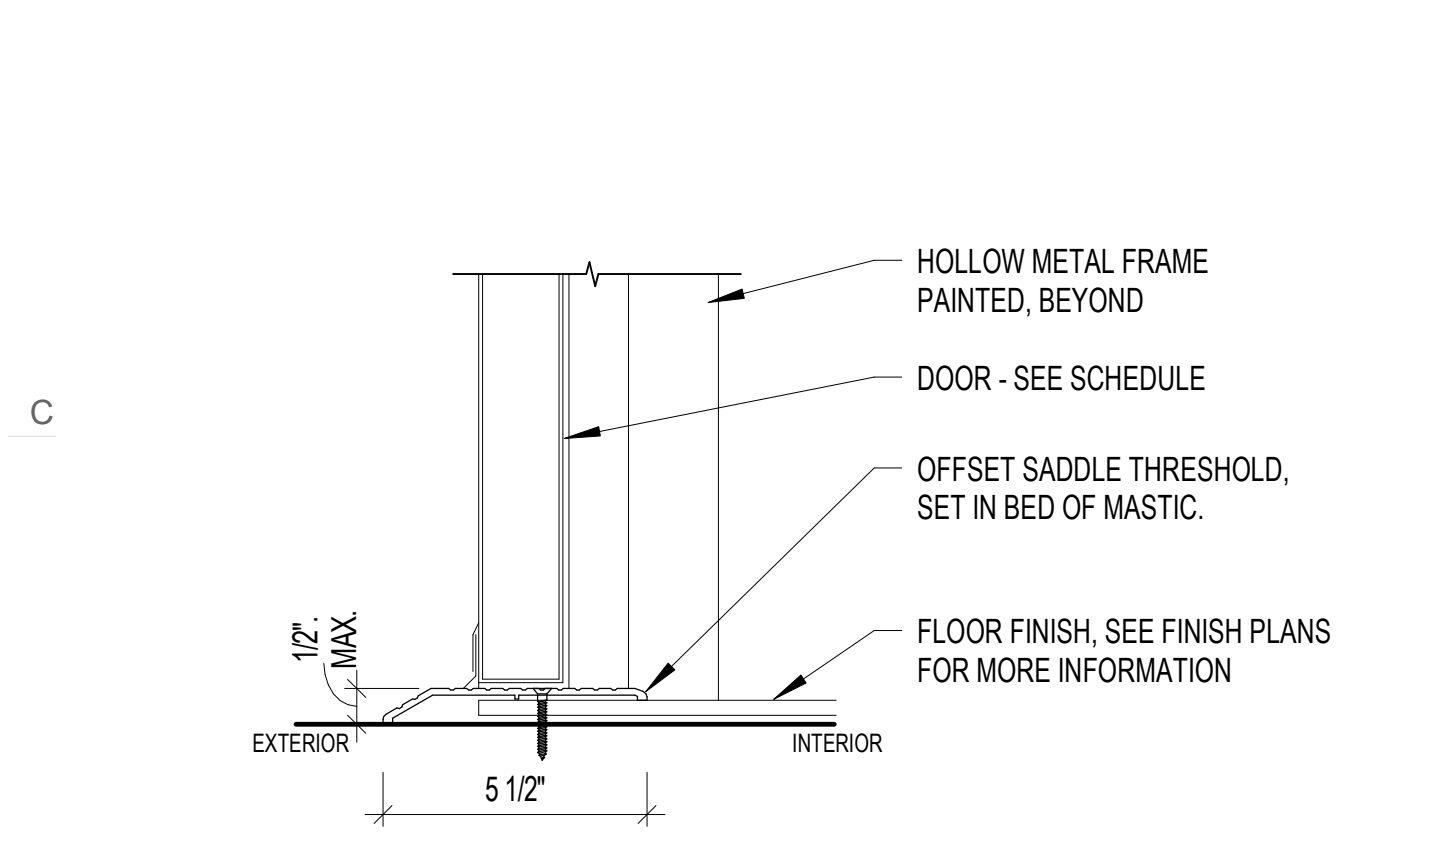


B5 EXTERIOR DOOR THRESHOLD
A-602 3" = 1'-0"

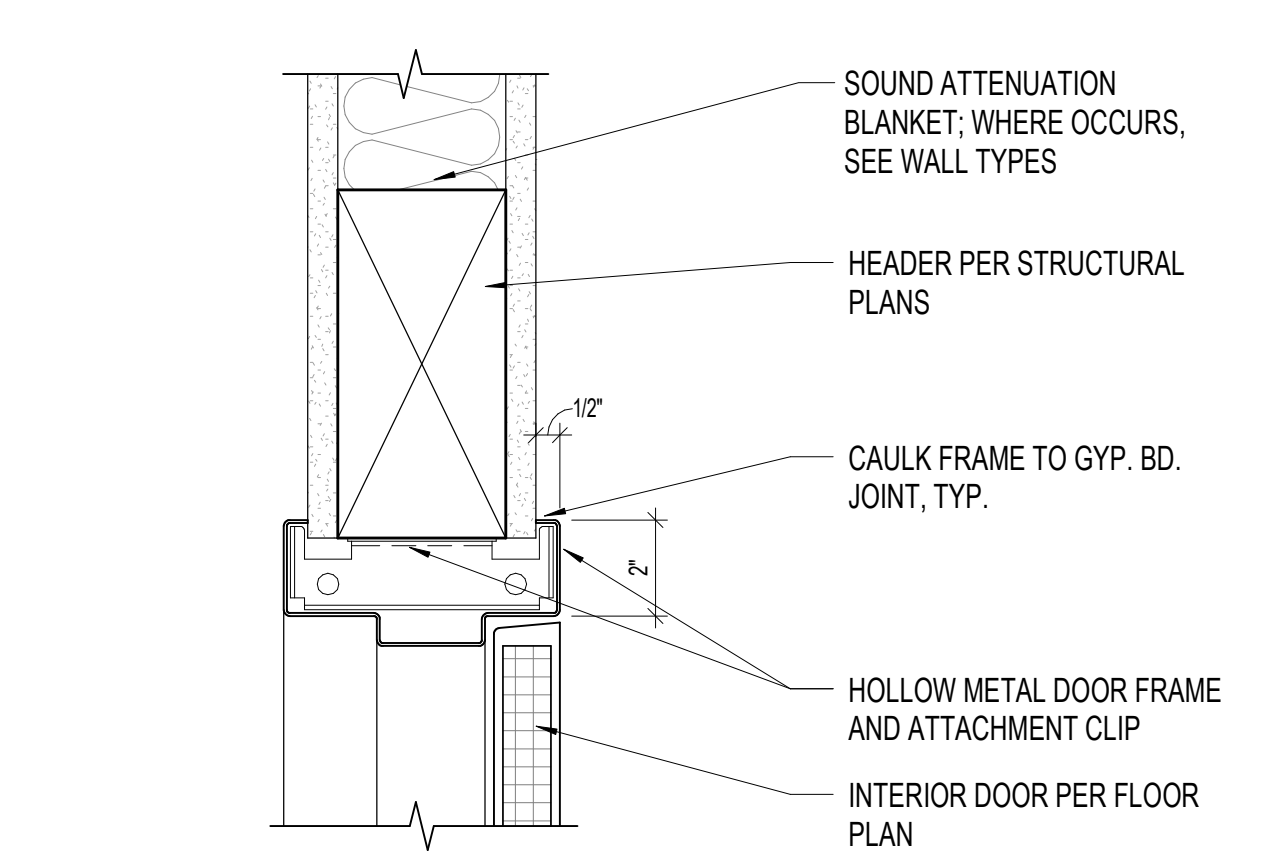


B4 INTERIOR HM DOOR HEAD
A-602 3" = 1'-0"

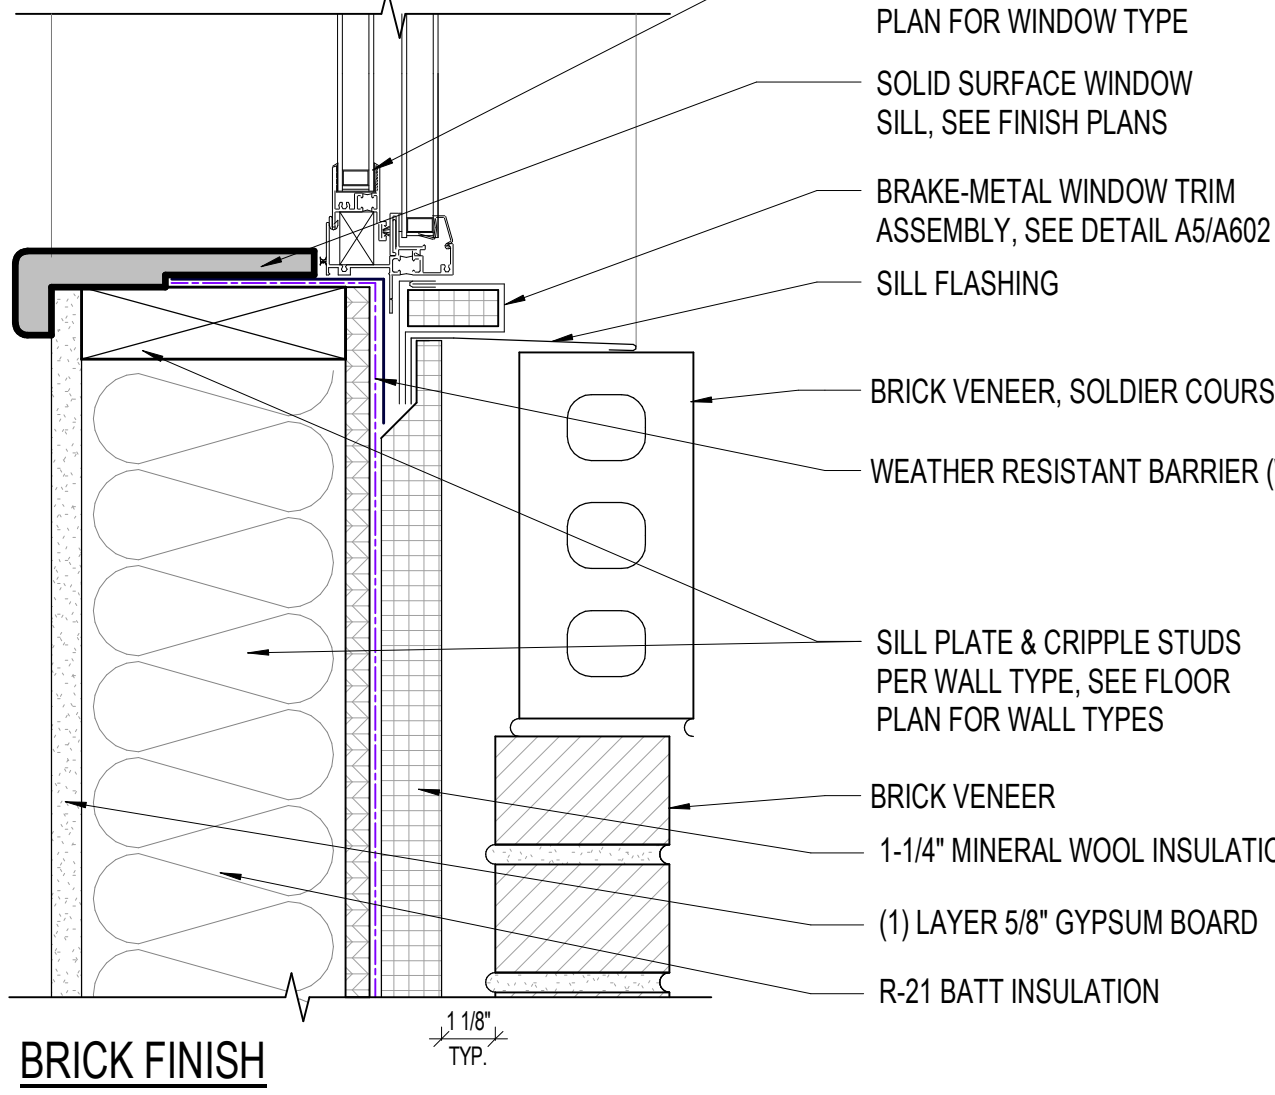


B3 EXTERIOR WINDOW SILL
A-602 3" = 1'-0"

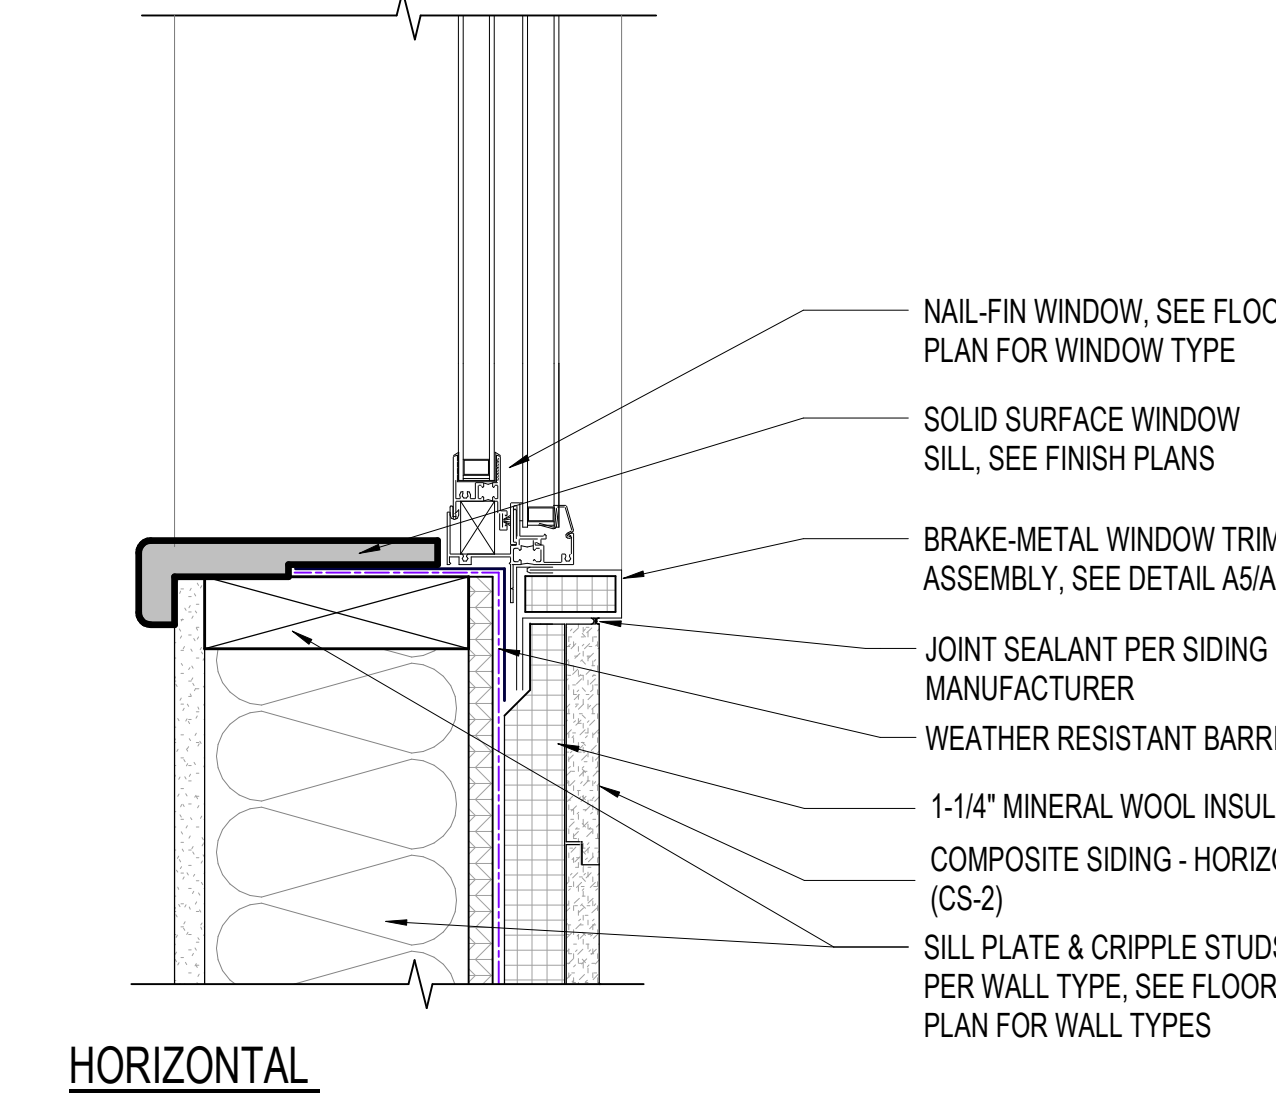


HORIZONTAL SIDING

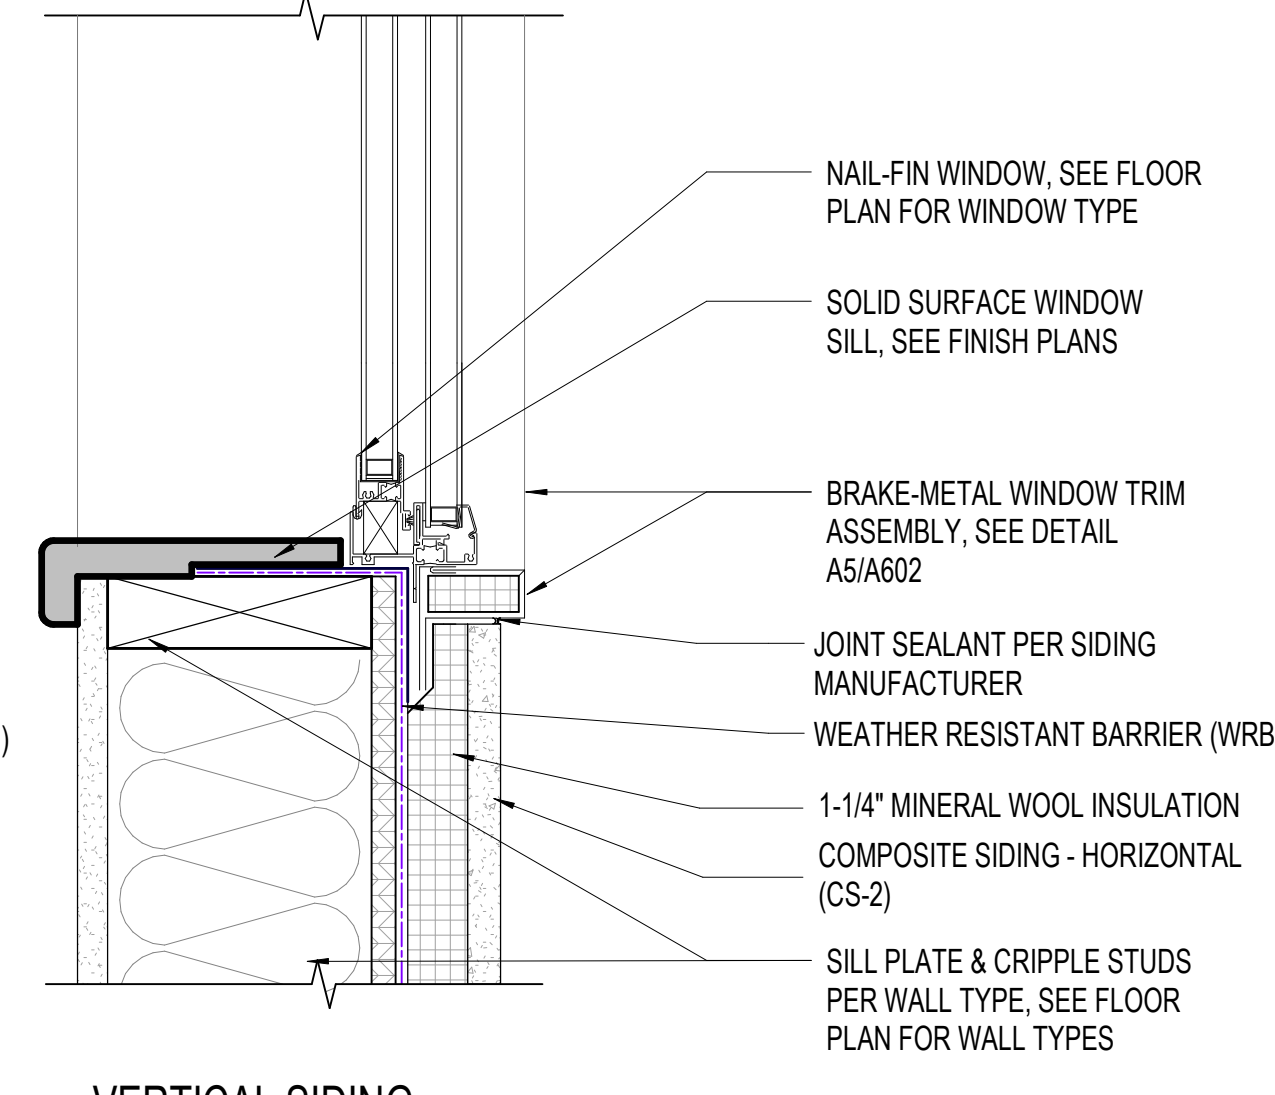


VERTICAL SIDING

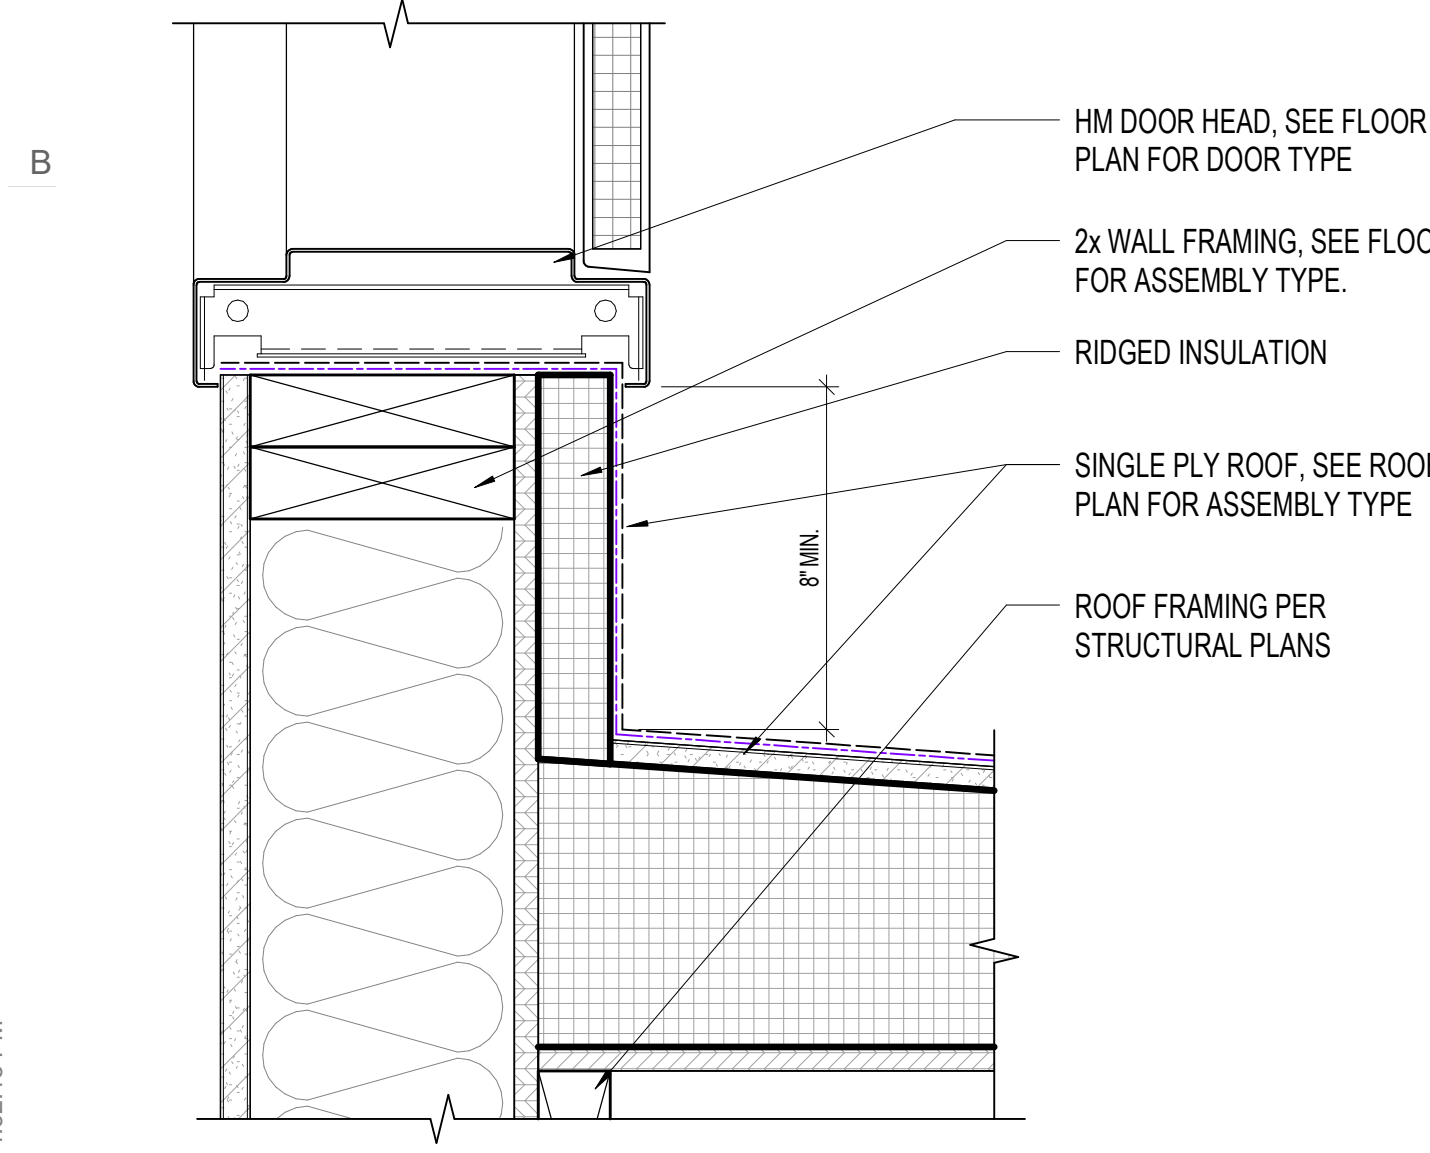

A5 EXTERIOR HM DOOR SILL @ ROOF
A-602 3" = 1'-0"

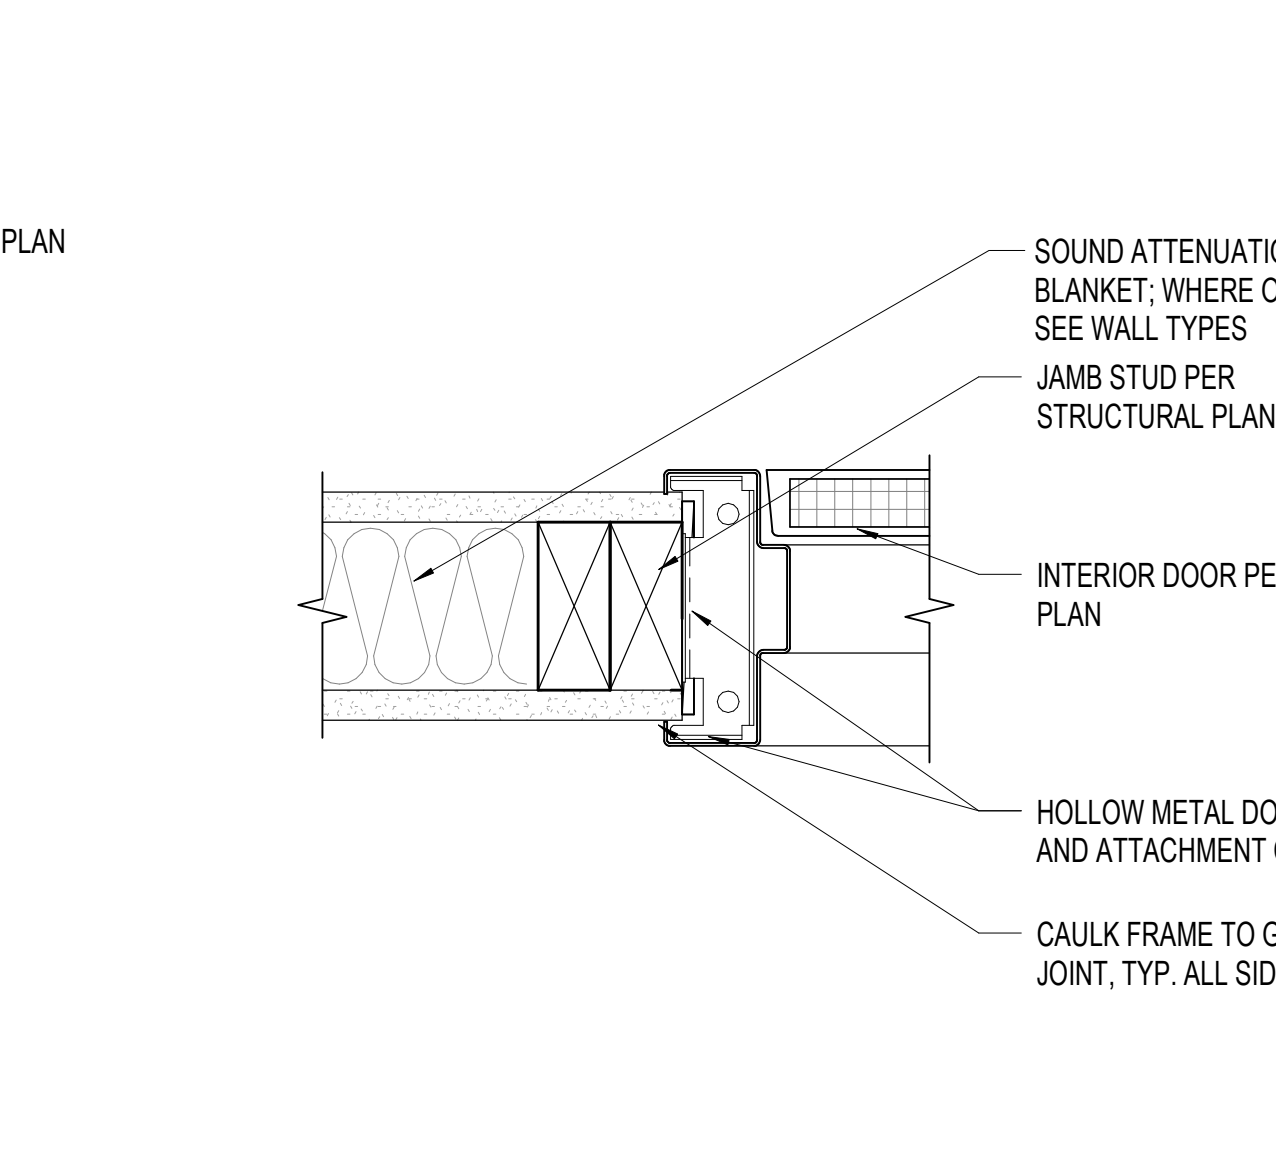


A4 INTERIOR HM DOOR JAMB
A-602 3" = 1'-0"

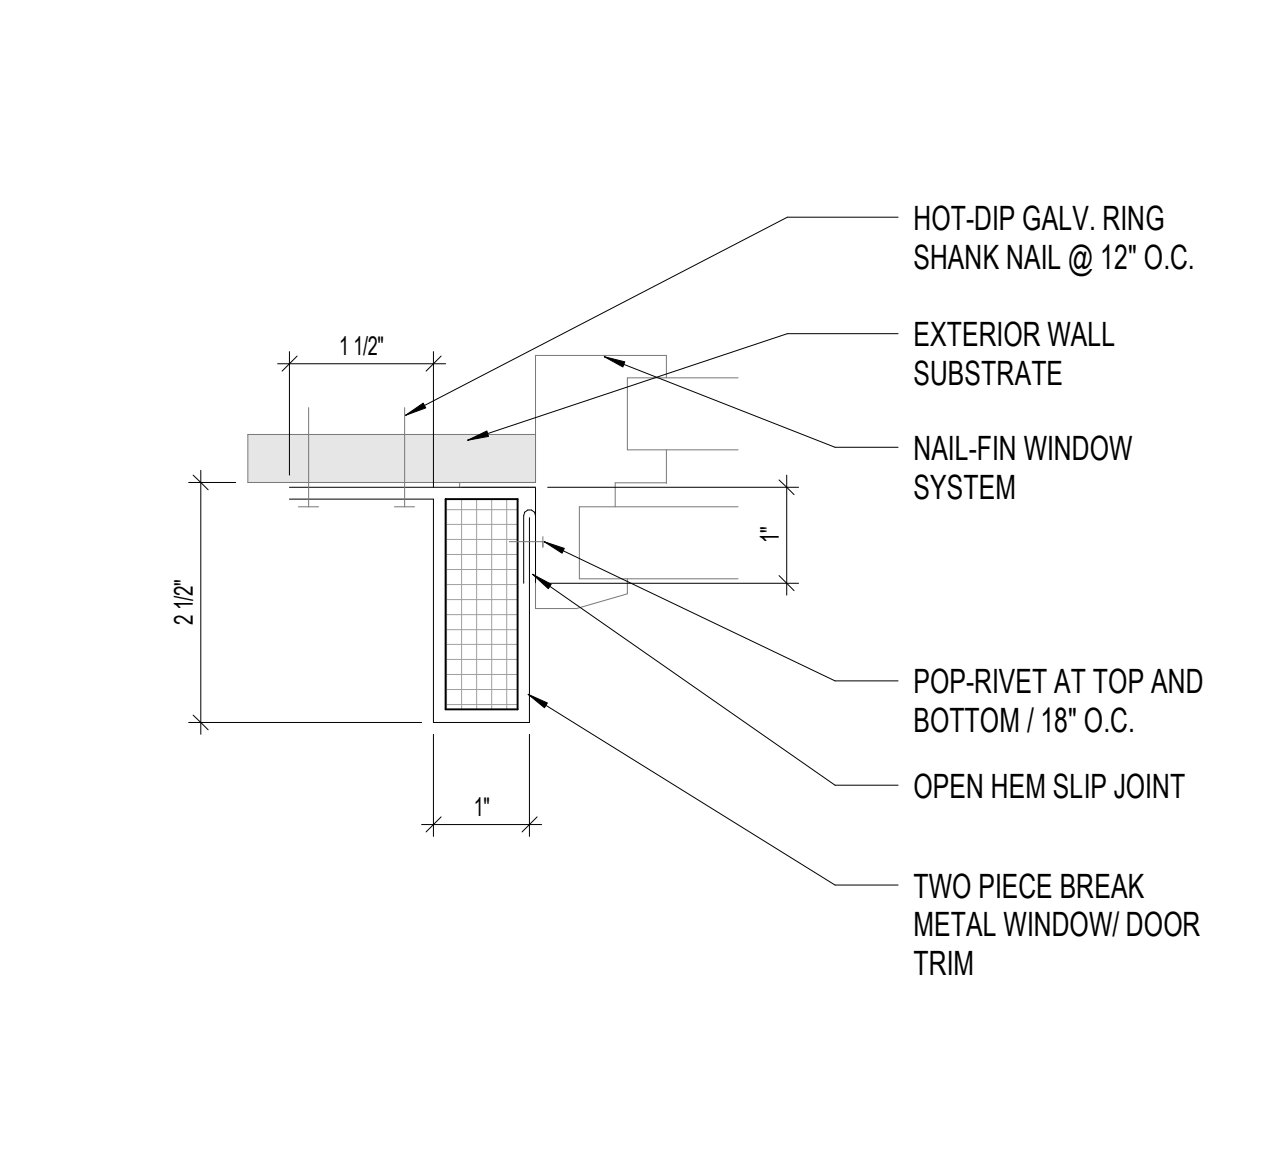

A2 EXTERIOR WINDOW / DOOR TRIM
A-602 6" = 1'-0"



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

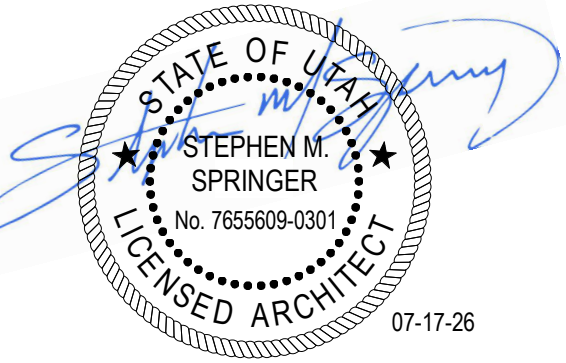

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604


Date Revision

BP3 - 100% CD SET

NEXUS PROJ. #: 25029
CHECKED BY:
DRAWN BY:
DATE: 07.17.2026

DOOR & WINDOW DETAILS

A-602

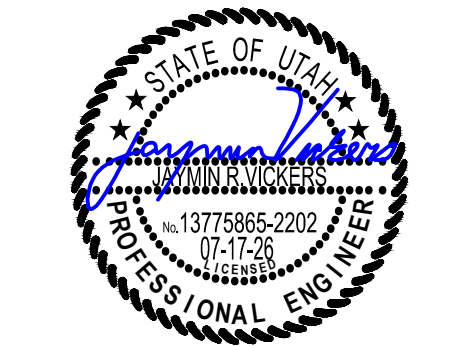


REVIEW SET

BRIGHAM YOUNG UNIVERSITY
WYMOUNT SOUTH HOUSING
WYMOUNT TERRACE
PROVO, UT 84604


Date Revision

**BP3 - 100% CD
REVIEW SET**
NEXUS PROJ. #: 25029
CHECKED BY: JRV
DRAWN BY: ECP
DATE: 07.17.2026
**OVERALL
UTILITY PLAN**

CU300

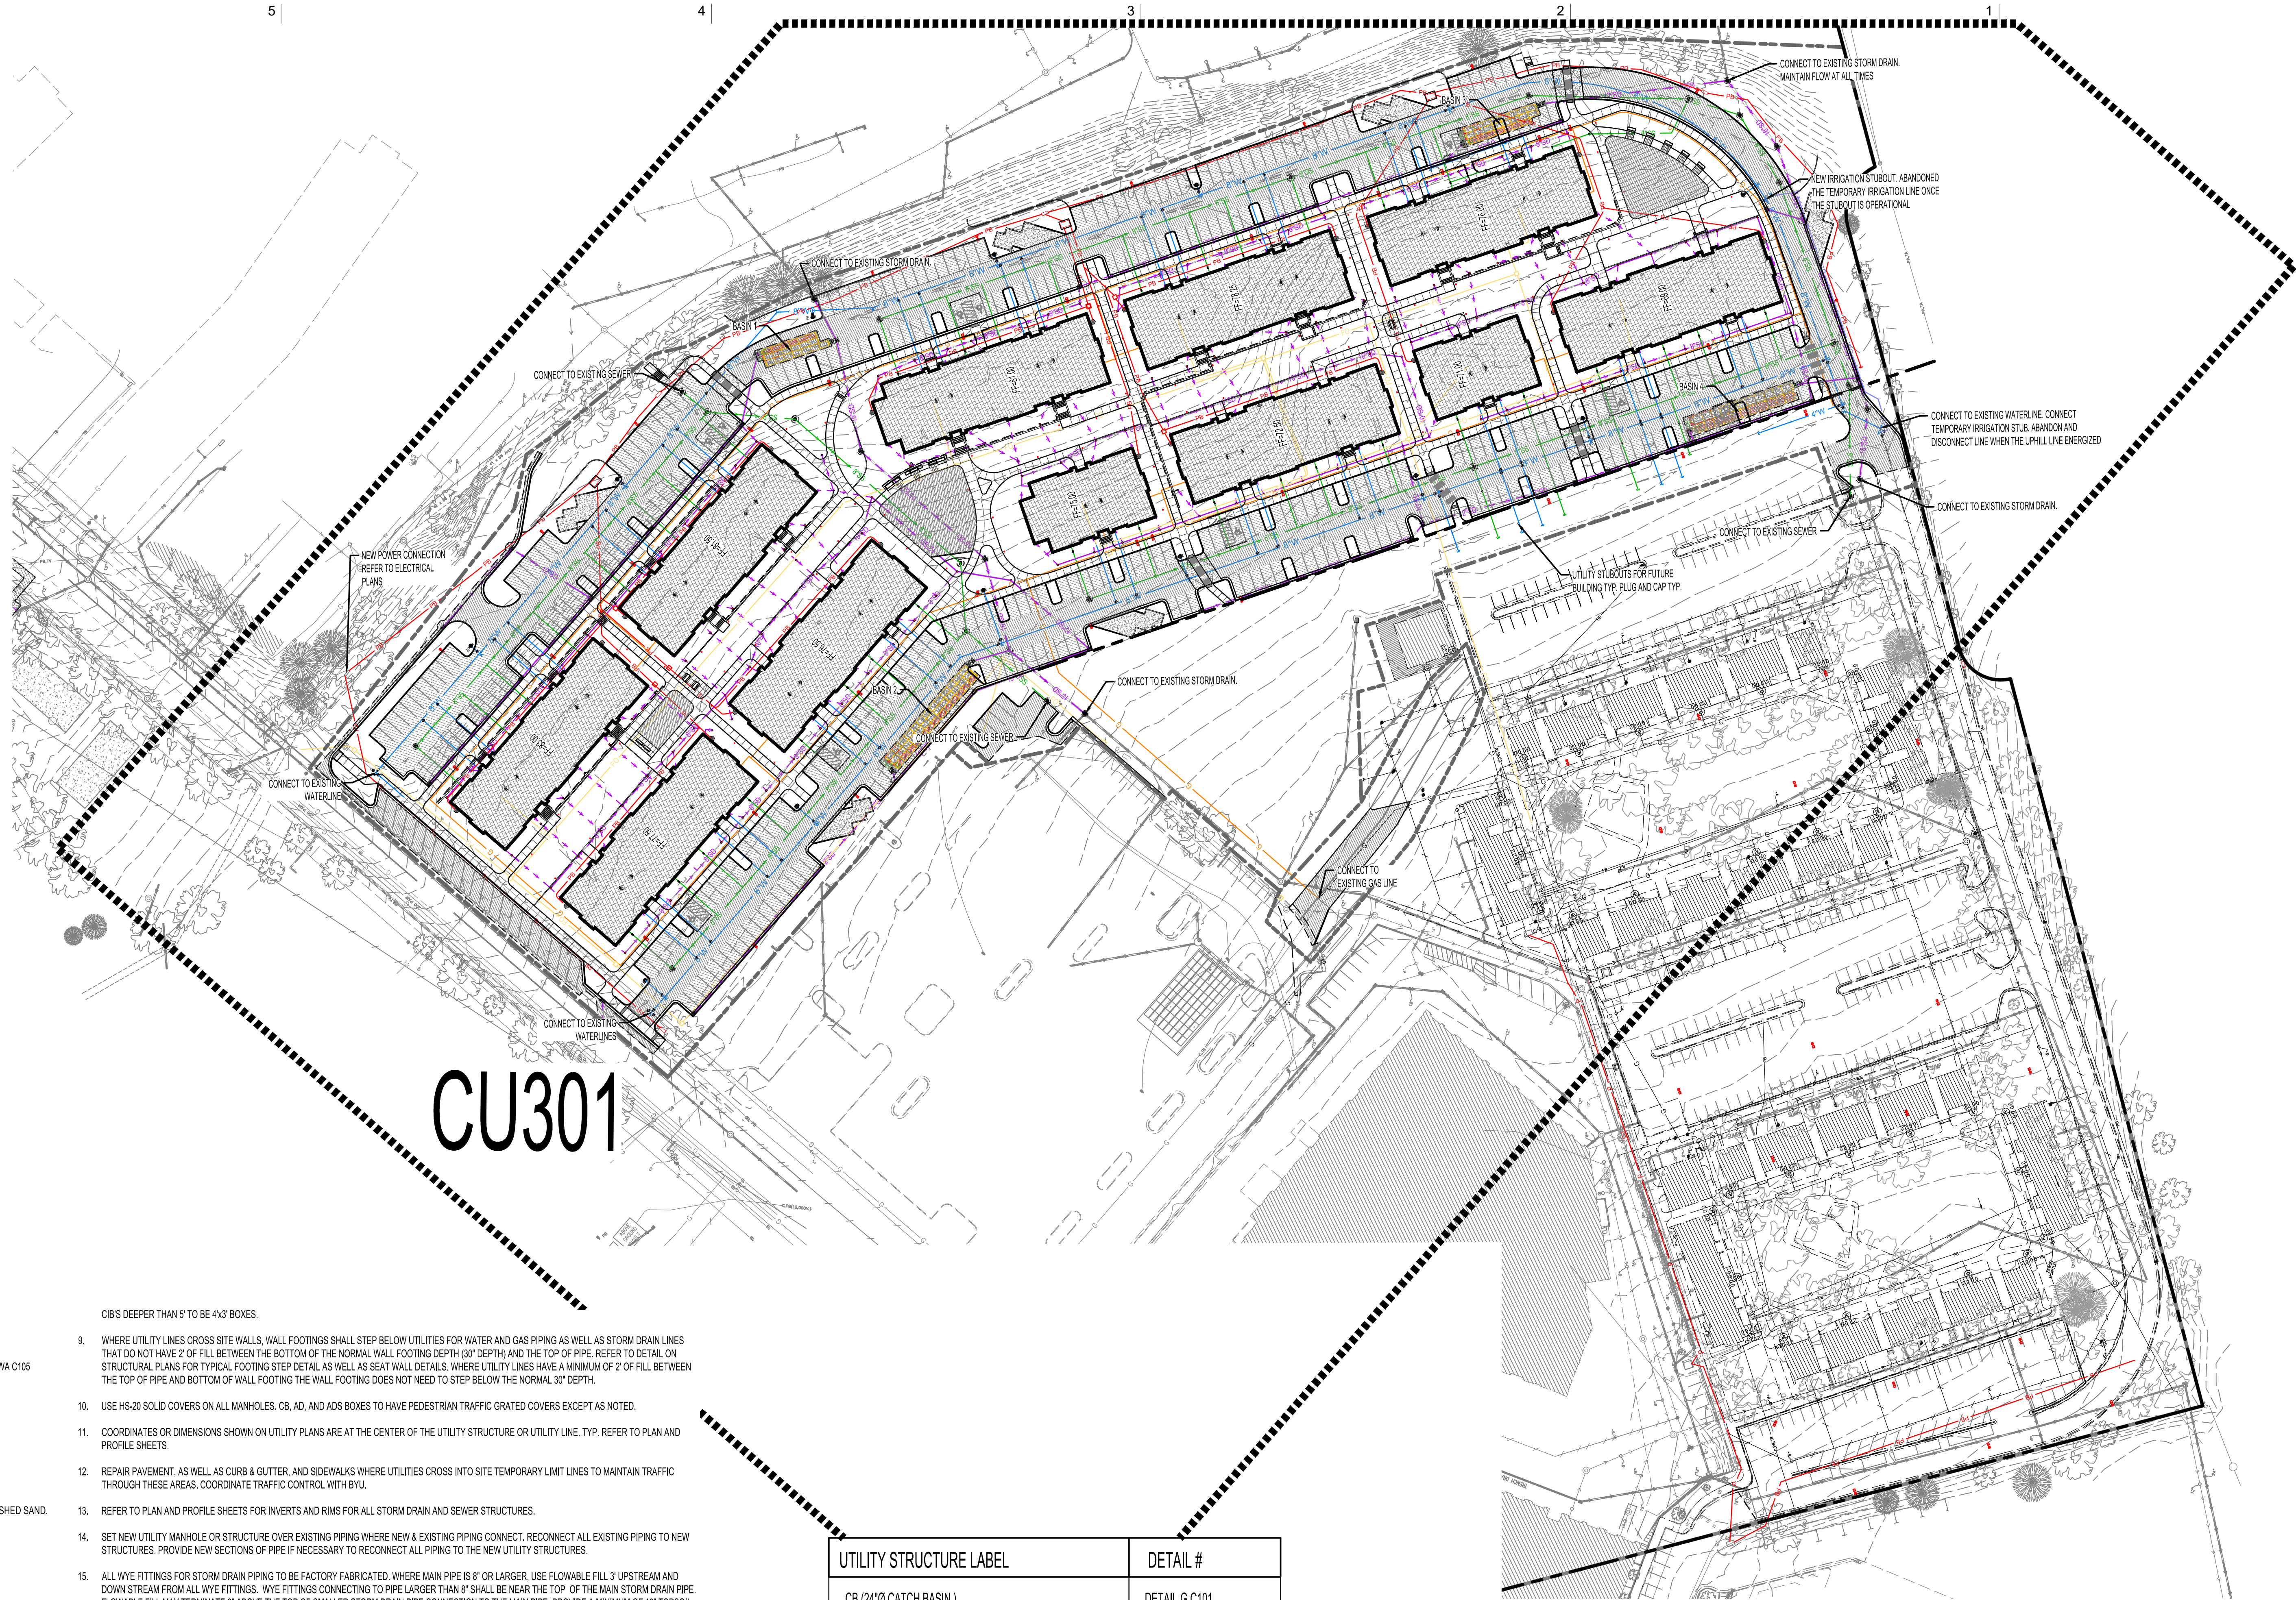

CU301

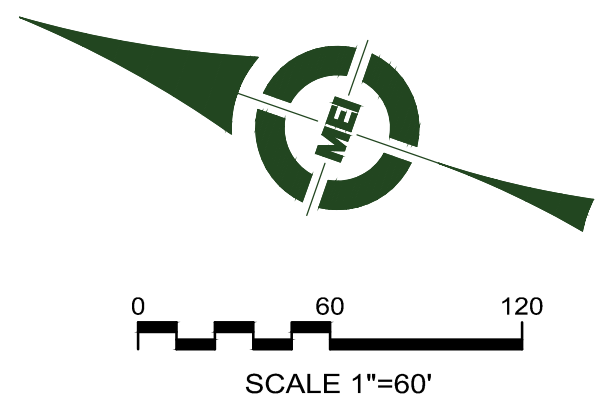

AGENCY APPROVAL

UTILITY STRUCTURE LABEL	DETAIL #
CB (24"Ø CATCH BASIN)	DETAIL G C101
ADS (15"Ø AREA DRAIN)	DETAIL F C101
ADP (120 AREA DRAIN PLANTER)	DETAIL H C101
AD (18"Ø AREA DRAIN)	DETAIL I C101
SDCO AND SSCO (SINGLE C.O.)	DETAIL H C100
FH (FIRE HYDRANT)	DETAIL J C102
SDMH (PRETREATMENT MANHOLE)	DETAIL A C102
CIB (CURB INLET BASIN)	DETAIL K C101
SSMH AND SDMH (7' OR DEEPER MANHOLE)	DETAIL A C101
SDMH (SHALLOW MANHOLE LESS THAN 7' DEEP)	DETAIL D C102
SSMH DROP MANHOLE	DETAIL 433 on C107
COB - STORM DRAIN CLEAN OUT BOX	DETAIL I C102
DS - ROOF DRAIN CONNECTION	DETAIL G C102
OVERFLOW BOX	DETAIL C C102
PRE-TREATMENT INLET BOX	DETAIL E C102

C NOTES

1. PIPING MATERIALS TO BE PER UTILITY SPEC. AS OUTLINED BELOW:

NEW WATER LINES - CEMENT MORTAR UNED DUCTILE IRON PIPE WRAPPED IN 10 MIL POLYETHYLENE SLEEVES PER AWWA C105 (THRUST BLOCK PER BYU STD)

WATER SERVICE LINES - 2" POLYETHYLENE AWWA C901 (SDR-9)

SEWER STORM DRAIN - PVC PIPE 4" TO 10" (SDR 35), USE 8" DIA FITTING ON SERVICE LINES. SEE NOTES ON CU-310
- 12" TO 18" HDPE PIPE WITH WATER TIGHT JOINTS. WYE FITTING TO BE WATER TIGHT JOINTS.

ROOF AND LANDSCAPE - 8" TO 10" PVC (SDR 35)

GAS - UAC 2000 MDPE YELLOW GAS PIPE SDR-11 PER ASTM D2837 PIPE ZONE MATERIAL TO BE WASHED SAND. SEE NOTE 5.
2. SITE WORK TO INTERFACE WITH BUILDING CONSTRUCTION AT THE FOLLOWING LOCATIONS (REFER TO NOTES ON C100):


A. THE SEWER SERVICE TO THE BUILDING CONNECTS TO THE SITE SYSTEM AT THE DOUBLE CLEANOUTS AS SHOWN ON THE PLUMBING PLANS.

B. ALL OTHER UTILITIES CONNECTING TO THE BUILDING (EXCEPT WATER LINES) WILL INTERFACE 5' FROM THE BUILDING. SITE CONTRACTOR TO PROVIDE ALL NECESSARY FITTINGS OR REDUCERS AS REQUIRED FOR CONNECTION TO THE BUILDING SUBROUT.


C. EXTERIOR CLEANOUT ON THE ROOF DRAIN LINES WILL BE PART OF THE SITE WORK.
3. ALL FIRE SPRINKLER LINES SHALL HAVE 60" OF COVER MINIMUM. ALL OTHER WATER LINES INCLUDING EXISTING LINES TO HAVE 48" MINIMUM COVER. CUT IN NEW TEE CONNECTIONS TO EXISTING WATER LINE CONNECTIONS. COORDINATE WITH BYU ENGINEERING. TERMINATE NEW 2" WATER BUILDING SERVICE LINES IN THE BASE FLOOR TERMINATING 24" ABOVE THE FINISH FLOOR. PROVIDE A 4" PVC SLEEVE THROUGH THE FLOOR SLAB FOR THE 2" POLY LINE CONNECTION TO THE BUILDING. REFER TO PLUMBING PLANS FOR EXTENSION IN THE BUILDING.
4. POT HOLE ALL EXISTING UTILITY CROSSINGS PRIOR TO ROUTING ANY NEW UTILITIES. ALL NEW SEWER, DRAINAGE, OR OTHER GRAVITY LINES SHALL BE COMPLETED PRIOR TO ROUTING ANY PRESSURE LINES. WHERE EXISTING UTILITIES CONFLICT WITH NEW GRAVITY LINES, RAISE OR LOWER EXISTING UTILITIES TO ACCOMMODATE NEW GRAVITY LINES. PROVIDE 12" MIN. CLEARANCE. WATER LINES SHALL NOT BE PLACED UNDER SEWER LINES AND SHALL HAVE A MINIMUM OF 18" CLEARANCE OF SEWER.
5. NEW GAS LINE SHALL BE INSTALLED BY AN ENBRIDGE GAS APPROVED CONTRACTOR (WHITAKER OR NIELS FUGAL CONSTRUCTION OR ETC.). ALL GAS LINE CONSTRUCTION TO BE IN ACCORDANCE WITH PIPE MANUFACTURERS RECOMMENDATIONS. A #14 (AWG) TRACER WIRE IS REQUIRED FOR ALL NEW MDPE GAS PIPING. TERMINATE GAS LINE AND TRACER WIRE AT AN ANDELESS RISER AND GAS COCK SET ABOVE GRADE TO CONNECT TO THE BUILDING REGULATOR AS SHOWN ON PLUMBING PLANS. ALL WORK TO BE COMPLETED IN ACCORDANCE WITH THE AMERICAN GAS ASSOCIATION PLASTIC PIPE MANUAL FOR GAS SERVICE. GAS LINE TO THE METER WILL BE COMPLETED BY ENBRIDGE INCLUDING THE METER SET. THE BURIED LINE IS A 2" LINE.
6. THRUST BLOCK ALL FITTINGS OR PROVIDE RESTRAINED JOINTS PER BYU STANDARDS. THE NEW 4" & 6" CONNECTIONS TO THE NEW BUILDING WILL REQUIRE RESTRAINED JOINTS FOR MANY FITTINGS DUE TO LIMITED SPACE BETWEEN PIPES. SEE TYPICAL DETAIL D ON C101.
7. WATER VALVES, SEWER MANHOLES, STORM DRAIN INLETS OR CLEANOUT BOXES, AND OTHER SURFACE UTILITY ACCESSORIES SHALL BE RAISED AND SLOPED TO ACCURATE FINISH SURFACE BY A CONCRETE GRADE COLLAR IN PAVEMENT. COLLAR SHALL BE 12" WIDE AROUND THE UTILITY APPARATUS AND 8" MINIMUM THICKNESS. PLACE 2 #4 REBAR HOOPS IN COLLAR. REFER TO DETAIL ON SHEET C100. CONCRETE COLLARS TO BE USED ONLY IN ASPHALT PAVEMENT AREAS.
8. ALL "CB" LABELS ARE 24"Ø NYLOPLAST DRAINAGE BASINS WITH HS-20 RING AND COVER. ALL "ADS" LABELS ARE 15" NYLOPLAST DRAINAGE BASINS. ALL "AD" LABELS ARE 18" NYLOPLAST DRAINAGE BASINS. REFER TO DETAIL CALLOUTS IN TABLE ON THIS SHEET. ALL GRATED COVERS TO BE HEE SAFE COVERS.

- CIBS DEEPER THAN 5' TO BE 4X3' BOXES.
9. WHERE UTILITY LINES CROSS SITE WALLS, WALL FOOTINGS SHALL STEP BELOW UTILITIES FOR WATER AND GAS PIPING AS WELL AS STORM DRAIN LINES THAT DO NOT HAVE 2' OF FILL BETWEEN THE BOTTOM OF THE NORMAL WALL FOOTING DEPTH (30" DEPTH) AND THE TOP OF PIPE. REFER TO DETAIL ON STRUCTURAL PLANS FOR TYPICAL FOOTING STEP DETAIL AS WELL AS SEAT WALL DETAILS. WHERE UTILITY LINES HAVE A MINIMUM OF 2' OF FILL BETWEEN THE TOP OF PIPE AND BOTTOM OF WALL FOOTING THE WALL FOOTING DOES NOT NEED TO STEP BELOW THE NORMAL 30" DEPTH.
 10. USE HS-20 SOLID COVERS ON ALL MANHOLES, CB, AD, AND ADS BOXES TO HAVE PEDESTRIAN TRAFFIC GRATED COVERS EXCEPT AS NOTED.
 11. COORDINATES OR DIMENSIONS SHOWN ON UTILITY PLANS ARE AT THE CENTER OF THE UTILITY STRUCTURE OR UTILITY LINE. TYP. REFER TO PLAN AND PROFILE SHEETS.
 12. REPAIR PAVEMENT, AS WELL AS CURB & GUTTER, AND SIDEWALKS WHERE UTILITIES CROSS INTO SITE TEMPORARY LIMIT LINES TO MAINTAIN TRAFFIC THROUGH THESE AREAS. COORDINATE TRAFFIC CONTROL WITH BYU.
 13. REFER TO PLAN AND PROFILE SHEETS FOR INVERTS AND RIMS FOR ALL STORM DRAIN AND SEWER STRUCTURES.
 14. SET NEW UTILITY MANHOLE OR STRUCTURE OVER EXISTING PIPING WHERE NEW & EXISTING PIPING CONNECT. RECONNECT ALL EXISTING PIPING TO NEW STRUCTURES. PROVIDE NEW SECTIONS OF PIPE IF NECESSARY TO RECONNECT ALL PIPING TO THE NEW UTILITY STRUCTURES.
 15. ALL WYE FITTINGS FOR STORM DRAIN PIPING TO BE FACTORY FABRICATED. WHERE MAIN PIPE IS 8" OR LARGER, USE FLOWABLE FILL 3' UPSTREAM AND DOWN STREAM FROM ALL WYE FITTINGS. WYE FITTINGS CONNECTING TO PIPE LARGER THAN 8" SHALL BE NEAR THE TOP OF THE MAIN STORM DRAIN PIPE. FLOWABLE FILL MAY TERMINATE 6" ABOVE THE TOP OF SMALLER STORM DRAIN PIPE CONNECTION TO THE MAIN PIPE. PROVIDE A MINIMUM OF 18" TOPSOIL COVER OVER TOP OF FLOWABLE FILL IN LANDSCAPE AREAS.
 16. SITE WALLS (EXCEPT STAIR CHEEK WALLS OR SEAT WALLS) TO HAVE A 3" PERFORATED DRAIN (PVC OR HDPE WRAPPED IN DRAINAGE FABRIC) AS SHOWN ON PLANS AND ON THE RETAINING WALL DETAILS ON STRUCTURAL PLANS. CONNECT TO SITE DRAINAGE STRUCTURES AS SHOWN WITH 4" PVC SOLID PIPE (SDR 35) FROM THE CONNECTION AT THE PERFORATED FOOTING DRAIN PIPE TO THE STORM DRAIN STRUCTURE. SLEEVE DRAIN PIPE THROUGH SITE WALLS AS REQUIRED TO CONNECT TO DRAINAGE SYSTEM. WHERE FOOTINGS STEP DOWN BELOW NORMAL DEPTH FOR UTILITY CROSSING, THE PERFORATED DRAIN PIPE DOES NOT STEP DOWN TO AVOID CREATING ANY LOW POINTS IN THE WALL DRAIN PIPING. CONNECTION OF PERFORATED DRAIN OCCUR AT EACH ADS BOX SET ALONG THE HIGHSIDE OF THE WALL. REFER TO PLAN AND PROFILE SHEETS.
 17. ADJUST EXISTING UTILITY STRUCTURES TO NEW GRADES SHOWN ON THE GRADING PLANS. SEE NOTE 7 ABOVE FOR STRUCTURES IN NEW PAVEMENT AND DETAILS ON C100.
 18. RETAIN AND PROTECT EXISTING UTILITIES IN THE CONSTRUCTION BOUNDARY.
 19. GPS SURVEY ABANDONED AND NEW UTILITIES. COORDINATE WITH BYU CONSTRUCTION PROJECT MANAGER TO REQUEST BYU CIVIL ENGINEER TO GPS SURVEY ABANDONED AND NEW UTILITIES THAT HAVE BEEN INSTALLED, CAPPED, PLUGGED, AND/OR ABANDONED IN PLACE BEFORE BURYING UTILITY.
 - a. PROVIDE AT LEAST 24-HOUR NOTICE.
 - b. UTILITIES INCLUDE BUT ARE NOT LIMITED TO THE FOLLOWING: WATER, STORM AND SEWER PIPELINES, VALVES, HYDRANTS, MANHOLES, CATCH BASINS, CLEAN OUTS, CONDUITS, DUCT BANKS, ETC.
 - c. CONTRACTOR WILL BE RESPONSIBLE AT THEIR EXPENSE TO UNCOVER UTILITIES THAT HAVE NOT BEEN PROPERLY GPS OR SURVEYED BY BYU.
 21. LIGHT POLE BASE DETAILS ARE SHOWN ON THE ELECTRICAL DETAILS AS NOTED IN THE UTILITY STRUCTURE TABLE. REFER TO THE ELECTRICAL PLANS FOR CONDUIT, WIRING, LIGHT POLE SIZES, AND REQUIREMENTS FOR THE ELECTRICAL SYSTEM.
 22. TRENCH DRAINS TD-1 THRU TD-5 TO BE "ACO DRAIN KLASSIKORANK K107" OR APPROVED EQUIVALENT. BUILT IN SLOPE TO BE APPROXIMATELY 1% FROM SHALLOW END TO OUTLET. PROVIDE A 4" BOTTOM OUTLET FOR A SCHEDULE 40 PVC PIPE AT THE LOW END OF THE TRENCH DRAIN. MINIMUM DEPTH AT LOW END TO BE 12" GRATE TO BE LOAD CLASS C-HEEL SAFE PERFORATED STAINLESS STEEL OR APPROVED EQUIVALENT. CONNECT THE PVC PIPE TO THE NEAREST ADS BOX OR WYE INTO ROOF DRAIN PIPE WHERE SHOWN ON PLAN AND PROFILE SHEETS.
 23. REFER TO PLAN AND PROFILE SHEETS FOR SPECIFIC DATA ON WATER, SEWER, AND STORM DRAIN UTILITIES. STRUCTURE LABELS ARE SHOWN ON SHEET CU301.



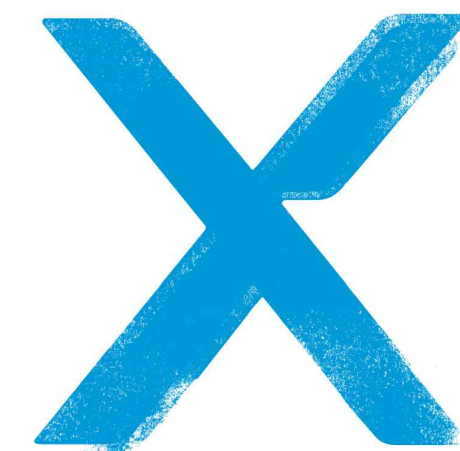

ARCH | NEXUS
Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

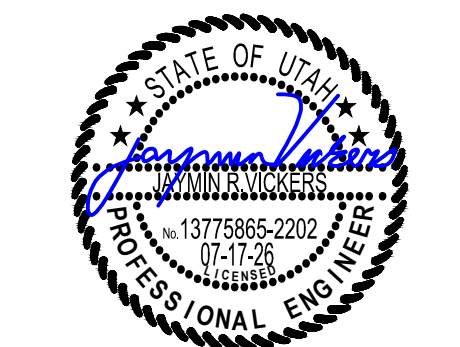

REVIEW SET

WYMOUNT SOUTH HOUSING

BRIGHAM YOUNG UNIVERSITY

WYMOUNT TERRACE
PROVO, UT 84604

Date Revision

BP3 - 100% CD
REVIEW SET


NEXUS PROJ. #: 25029
CHECKED BY: JRV
DRAWN BY: ECP
DATE: 07.17.2026

STORM DRAIN
PLAN AND
PROFILE


CU320

NOTES


- REFER TO SHEET CU030 FOR DETAIL REFERENCES FOR EACH DRAINAGE STRUCTURE. ONLY MAIN LINES ARE PROFILED. SLOPE AND STRUCTURE INVERTS ARE PROVIDED FOR ALL PIPE SECTIONS THAT ARE NOT PROFILED ON THE STORM DRAIN PLAN AND PROFILE SHEETS. STEP WALL FOOTING PER NOTES ON CU030 FOR STORM DRAIN LINES.
- ROOF DRAIN DATA IS SHOWN ON STORM DRAIN PLAN AND PROFILE SHEETS. CONNECT DOWN SPOUTS TO STORM DRAIN PIPING PER DETAIL ON SHEET C102.
- PROVIDE 12" MIN. CLEARANCE BETWEEN STORM DRAIN LINES AND OTHER UTILITIES CROSSING THE STORM DRAIN. USE FLOUNDER FALL PER AFWA SPECIFICATIONS BETWEEN UTILITIES WITH 12" OR SLIGHTLY LESS CLEARANCE.
- REFER TO NOTES ON CU030 FOR GENERAL UTILITY NOTES, TYP.
- POT HOLE ALL EXISTING UTILITY CROSSINGS FOR NEW STORM DRAIN SEWER LINES. LOWER OR RAISE COMMUNICATIONS, ELECTRICAL, OR GAS LINES TO PROVIDE PROPER VERTICAL ALIGNMENT FOR THE DRAIN LINES. LOWER EXISTING OR NEW WATER LINES WHERE CONFLICTS OCCUR WITH DRAIN LINES OR OTHER EXISTING UTILITIES. WHERE CROSSING OF THE EXISTING UTILITY TUNNEL OCCURS, POT HOLE TUNNEL TO INSURE PIPING CLEARS TUNNEL STRUCTURE 12" MINIMUM.
- APPROXIMATE ELEVATIONS FOR THE STORM DRAIN LINES CROSSING THE SITE WALLS ARE SHOWN ON THE PROFILES. STEP WALL FOOTING BELOW INVERT OF STORM DRAIN LINE. REFER TO WALL DETAILS ON ARCHITECTURAL AND LANDSCAPE PLANS. REFER TO NOTES ON CU030 FOR WALL CROSSINGS. THE CONNECTION ELEVATION OF WALL DRAIN TO THE ADS BOXES IS SHOWN BY THE 4" INVERTS ON THE PROFILES. WITH OWNER APPROVAL, SOME OF THE ADS BOXES IN THE MIDDLE OF VALLED PLANTERS MAY BE BURIED BELOW GRADE 12" TO ALLOW PLANTING OVER THE TOP OF THE BOXES TO MAINTAIN LANDSCAPE CONSISTENCY. REFER TO DETAIL ON SHEET C101 WHERE BOXES MAY BE BURIED BELOW GRADE.
- REFER TO NOTES FOR WYE FITTINGS ON PIPE 8" OR LARGER THAN 8" ON CU030.
- CORE DRILL AND EPOXY GROUT NEW PIPING INTO EXISTING STORM DRAIN STRUCTURE.
- CONTRACTOR REQUIRED TO OBTAIN NECESSARY PERMITS FROM PROVO CITY PRIOR TO ANY NEW CONNECTIONS. REFER TO NOTES ON CU030.
- SDMH-2, SDMH-6, SDMH-12 AND SDMH-14 ARE SET OVER EXISTING STORM DRAIN LINES. POT HOLE AND FIELD VERIFY THE ELEVATION AND LOCATIONS OF EACH PIPE. RECONNECT EXISTING PIPE TO NEW MANHOLES. REFER TO NOTES ON CU030.
- PROJECT LIMITS LINE REMOVED ON SOME SHEETS FOR CLARITY.
- THE 15" LINE ROUTES THROUGH OVERFLOW BOX 1 DOWN STREAM ON THE OFFICE PLATE WALL. REFER TO NOTES ON THE DETAIL ON SHEET C102.
- REFER TO NOTES ON CU030 FOR TRENCH DRAIN REQUIREMENTS. CONNECT TRENCH DRAINS TO STORM DRAIN SYSTEM AS SHOWN ON PLAN AND PROFILE SHEETS.
- CONNECT TO EXISTING CONCRETE PIPE WITH "MARMAC" OR APPROVED EQUIVALENT PIPE CONNECTOR OF DISMILAR PIPE.
- SD-2 AND SD-4 STORM DRAIN LINES MUST BE COMPLETED PRIOR TO ANY DEMO BEING COMPLETED ON THE STORM DRAIN LINES SERVING AREAS NORTH OF THE SITE. ALL OTHER STORM LINES MAY BE COMPLETED WITH OTHER PHASE 1 UTILITY CONSTRUCTION.

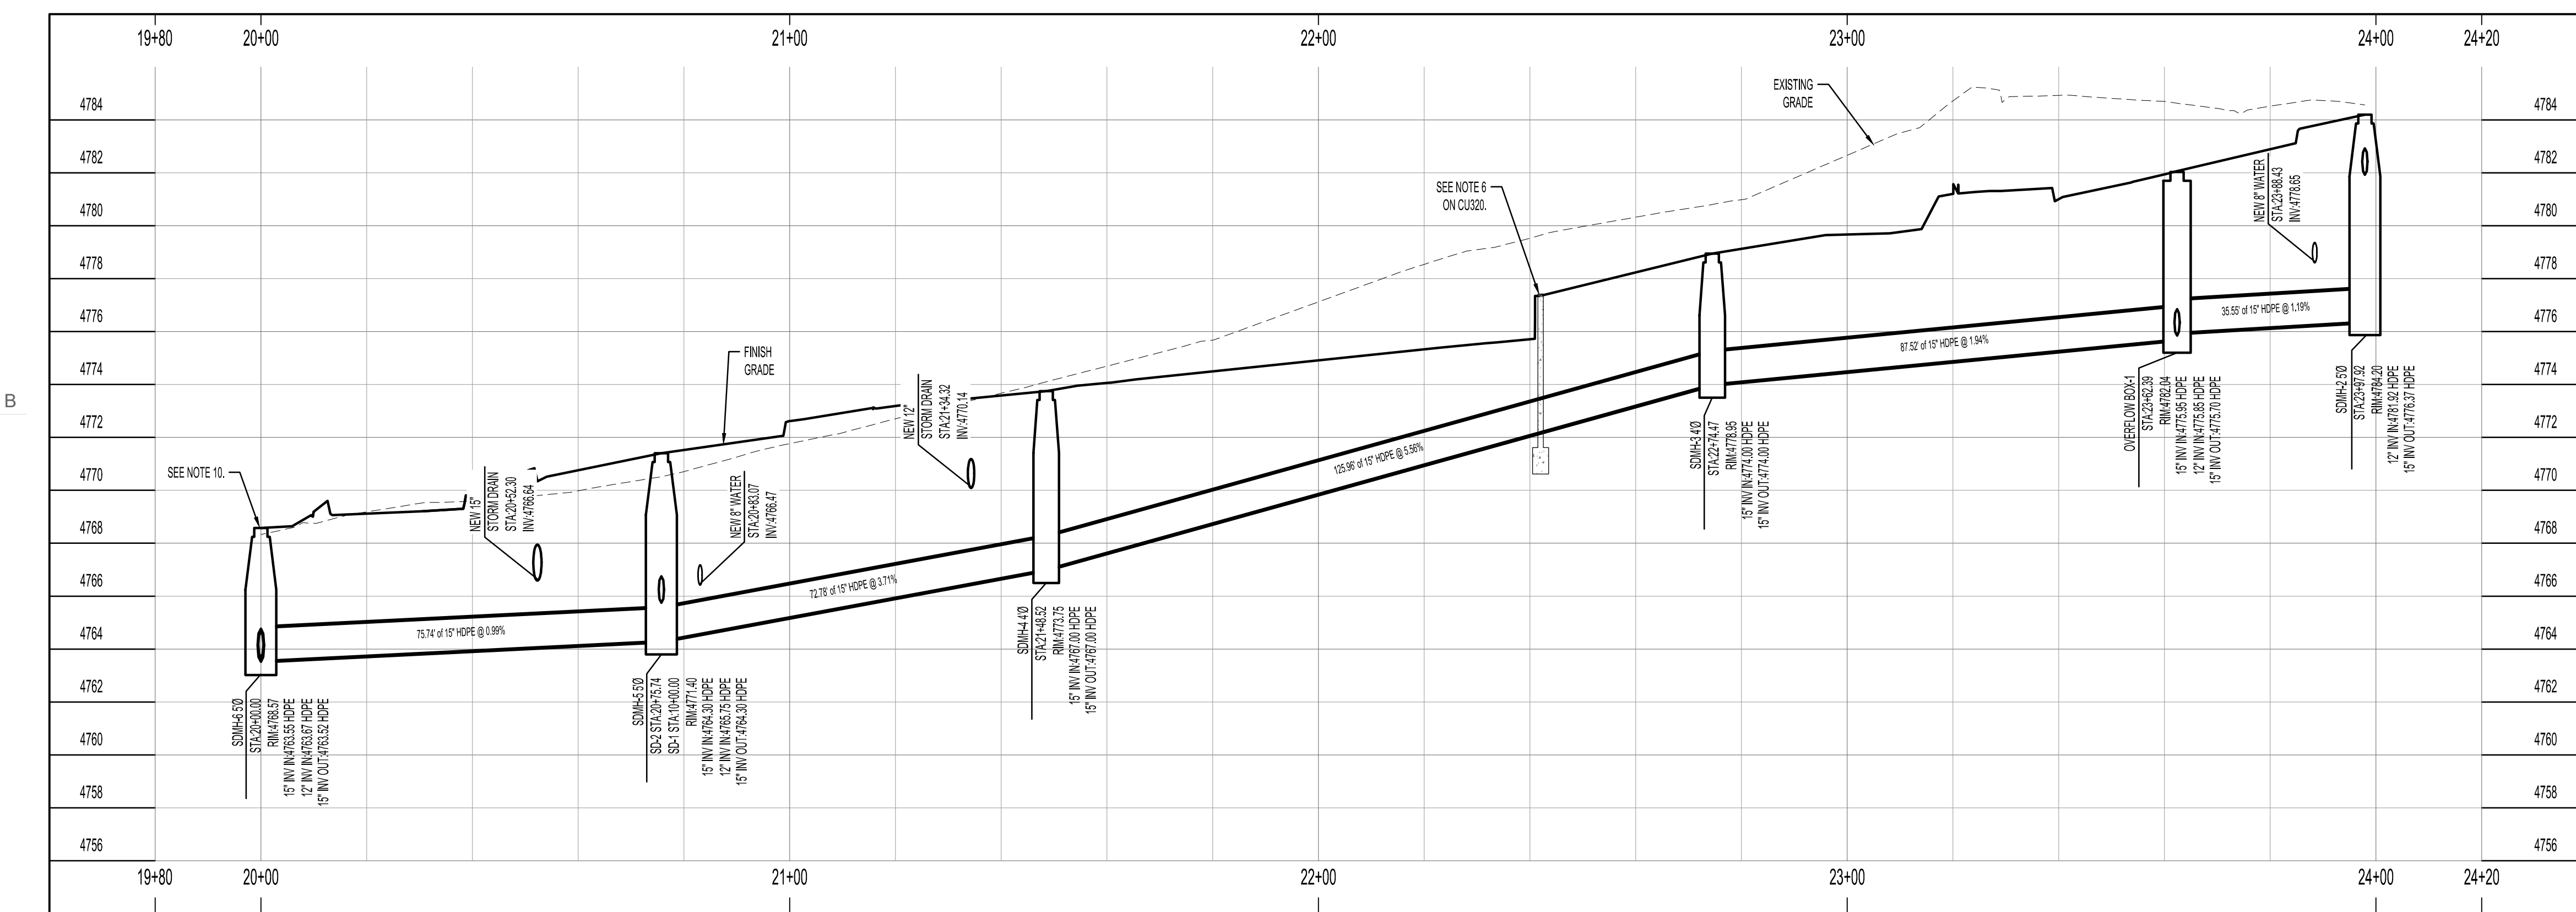

SD-2 STORM DRAINLINE PROFILE

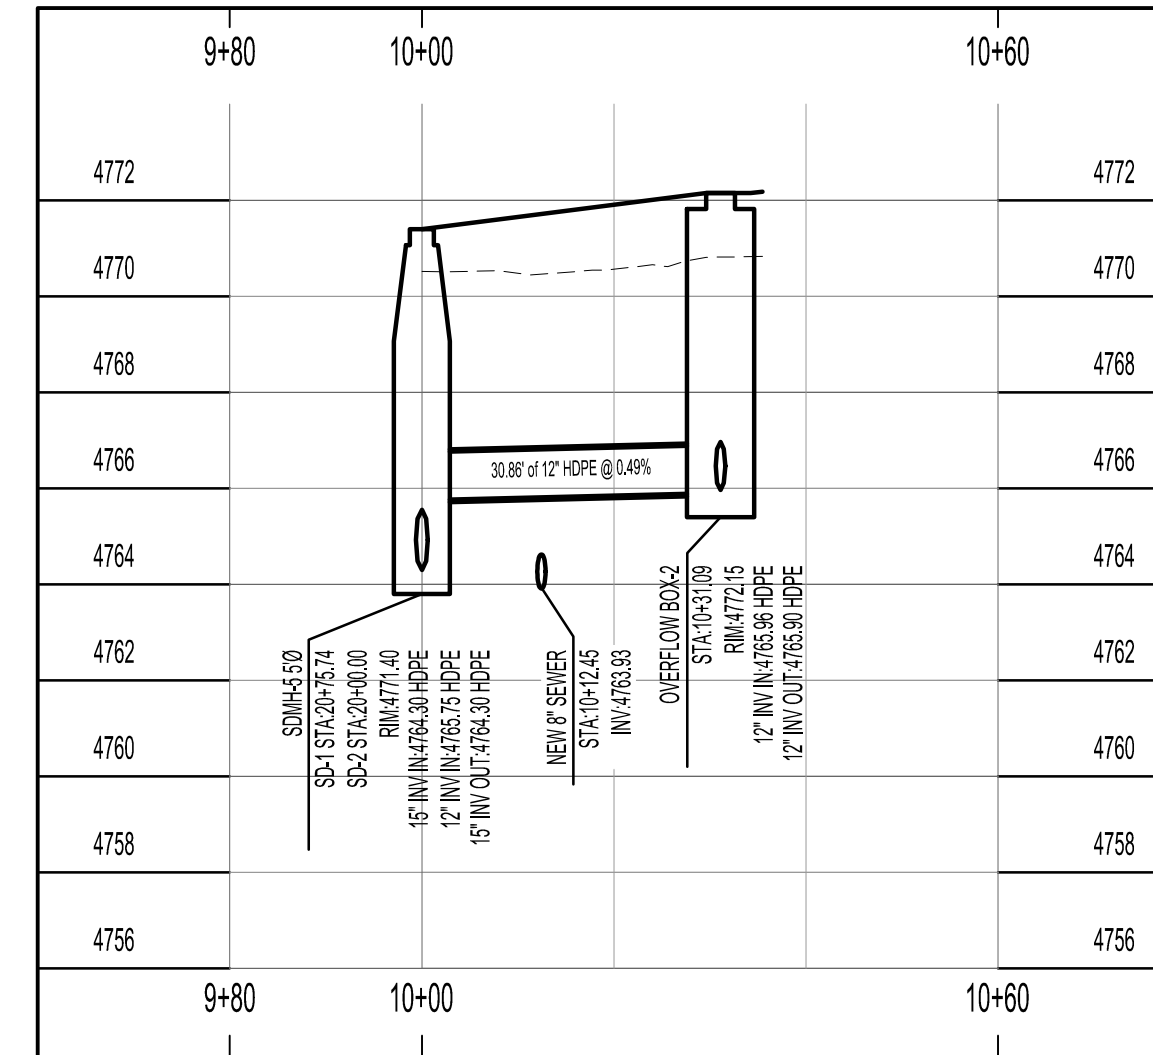


SD-1 STORM DRAINLINE PROFILE

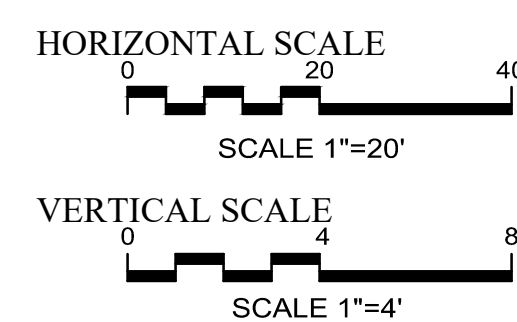


SHEET FOR REFERENCE ONLY
PREVIOUSLY SUBMITTED WITH
BP-1 DEMO PACKAGE.

AGENCY APPROVAL

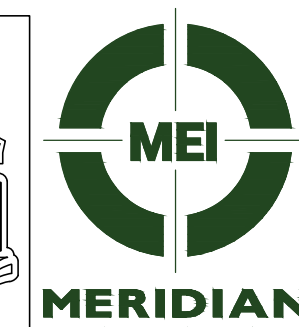



Architectural NEXUS, Inc.
2505 East Parleys Way
Salt Lake City, Utah 84109
T 801.924.5000
http://www.archnexus.com

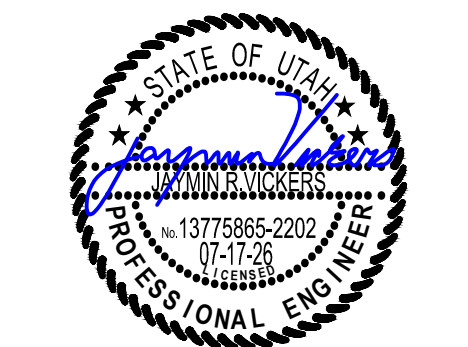

REVIEW SET

WYMOUNT SOUTH HOUSING

BRIGHAM YOUNG UNIVERSITY

WYMOUNT TERRACE
PROVO, UT 84604

Date Revision

BP3 - 100% CD REVIEW SET

NEXUS PROJ. #: 25029
CHECKED BY: JRV
DRAWN BY: ECP
DATE: 07.17.2026

ENLARGED HYDROLOGY PLAN

CG452

Date:	16-Jun-26	
Drainage calculations for:	Wymount Basin 3	
Location:	Provo, UT	
Allowable Release Rate		
Total Area	2.55 Ac.	111092 sq.ft.
Release Rate (0.50 cfs/acre)	1.275 cfs	
Infiltration Rate	0.0 in/hr	0 SF Infiltration Area
Infiltration Volume	0.000 cfs	
Paved Area:	45000 SF	Runoff Coefficients
Landscape Area:	52992 SF	C= 0.9
Roof Area:	13500 SF	C= 0.2
Other	0 SF	C= 0.9
		C= 0.15
TOTAL AREA	111092 SF	Weighted C 0.57
Lapsed Time	Accum. Rainfall	"CA" Total Runoff Vol. Discharge Req'd Storage
Minutes	Inches (10 yr)	CF CF CF CF
15	0.54	1.45 2840 1148 1692
30	0.73	1.45 3827 2295 1531
60	0.91	1.45 4735 4591 144
120	1.05	1.45 5482 9181 0
180	1.17	1.45 6108 13772 0
360	1.44	1.45 7518 27543 0
720	1.83	1.45 9554 55087 0
1440	2.25	1.45 11746 110174 0
REQUIRED DETENTION STORAGE:		1692 CF 10yr Event

Basin 3 Orifice Calculation		WQV (Water Quality Volume)		Existing % impervious 60.00%
Basin 3 Area	2.55 Acre	Existing Rv=	0.53	New % impervious 52.66%
Discharge Rate	0.50 cfs/acre	80th Percentile BYU Station d=	0.04 ft	New Rv= 0.459
Qp =	1.28 cfs	Existing WQV =	2238.28 CF	New WQV 1,933.80
Highwater:	4771.50	Net Retention Required	0.00 CF	
Inv:	4768.15			
H =	3.35 ft			
A =	0.1447 Sq Ft			
D =	20.8 Sq In			
	5 1/8 In			

Date:	16-Jun-26	
Drainage calculations for:	Wymount Basin 4	
Location:	Provo, UT	
Allowable Release Rate		
Total Area	3.39 Ac.	147553 sq.ft.
Release Rate (0.50 cfs/acre)	1.694 cfs	
Infiltration Rate	0.0 in/hr	0 SF Infiltration Area
Infiltration Volume	0.000 cfs	
Paved Area:	50000 SF	Runoff Coefficients
Landscape Area:	48595 SF	C= 0.9
New and Future Roof Area:	48595 SF	C= 0.2
Other	0 SF	C= 0.9
		C= 0.15
TOTAL AREA	147553 SF	Weighted C 0.67
Lapsed Time	Accum. Rainfall	"CA" Total Runoff Vol. Discharge Req'd Storage
Minutes	Inches (10 yr)	CF CF CF CF
15	0.54	2.27 4441 1524 2917
30	0.73	2.27 5984 3049 2935
60	0.91	2.27 7405 6097 1307
120	1.05	2.27 8572 12194 0
180	1.17	2.27 9552 18292 0
360	1.44	2.27 11756 36583 0
720	1.83	2.27 14940 73167 0
1440	2.25	2.27 18368 146334 0
REQUIRED DETENTION STORAGE:		2935 CF 10yr Event

Date:	16-Jun-26	
Drainage calculations for:	Wymount Road Phase 1 and 2	
Location:	Provo, UT	
Allowable Release Rate		
Total Area	0.69 Ac.	30000 sq.ft.
Release Rate (0.50 cfs/acre)	0.344 cfs	
Infiltration Rate	0.0 in/hr	0 SF Infiltration Area
Infiltration Volume	0.000 cfs	
Paved Area:	30000 SF	Runoff Coefficients
Landscape Area:	0 SF	C= 0.9
New and Future Roof Area:	0 SF	C= 0.2
Other	0 SF	C= 0.9
		C= 0.15
TOTAL AREA	30000 SF	Weighted C 0.90
Lapsed Time	Accum. Rainfall	"CA" Total Runoff Vol. Discharge Req'd Storage
Minutes	Inches (10 yr)	CF CF CF CF
15	0.54	0.62 1214 310 904
30	0.73	0.62 1636 620 1016
60	0.91	0.62 2024 1240 784
120	1.05	0.62 2343 2479 0
180	1.17	0.62 2611 3719 0
360	1.44	0.62 3213 7438 0
720	1.83	0.62 4083 14876 0
1440	2.25	0.62 5021 29752 0
REQUIRED DETENTION STORAGE:		1016 CF 10yr Event

Basin 4 Orifice Calculation		WQV (Water Quality Volume)		Existing % impervious 60.00%
Basin 4 Area	3.39 Acre	Existing Rv=	0.53	New % impervious 67.07%
Discharge Rate	0.33 cfs/acre (See Note 3)	80th Percentile BYU Station d=	0.04 ft	New Rv= 0.590
Qp =	1.12 cfs	Existing WQV =	2972.90 CF	New WQV 3,336.60
Highwater:	4763.50	Net Retention Required	363.70 CF	
Inv:	4738.80			
H =	4.70 ft			
A =	0.1071 Sq Ft			
D =	15.4 Sq In			
	4 3/8 In			


NOTES:


- SEDIMENT WILL NOT BE ALLOWED INTO RETENTION BASIN DURING CONSTRUCTION AND DURING LANDSCAPE STABILIZATION OF SLOES. CONTRACTOR WILL BE REQUIRED TO CLEAN OR REPLACE RETENTION BASINS THAT ARE NOT MAINTAINED FREE OF SEDIMENT DURING CONSTRUCTION AND DURING ESTABLISHMENT OF ALL LANDSCAPED AREAS.
- APPROXIMATED A 10 YEAR STORM EVENT IS TO BE DETAINED UNDERGROUND.
- THE ROADWAY IN THE SOUTH (APPROXIMATELY 30,000 SF OF IMPERVIOUS SURFACE) IS NOT ABLE TO BE DETAINED. BASIN 4'S UNDERGROUND DETENTION SYSTEM WAS OVERSIZED TO INCORPORATE THIS VOLUME. BOTH BASIN 4 AND THE ROAD WERE SIZED WITH THE PARTIAL DETENTION RELEASE RATE OF 0.50 CFS/ACRE. BASIN 4'S ORIFICE PLATE WAS UNDERSIZED TO 0.33 CFS/ACRE AS WITH THIS RELEASE RATE A VOLUME OF APPROXIMATELY 4,000 CF IS NEEDED TO BE STORED WHICH IS EQUIVALENT TO THE COMBINED STORAGE VALUES OF BASIN 4 AND THE ROAD.

HYDROLOGY LEGEND	
---	HIGH WATER LINE
---	10-YEAR STORM OVERFLOW PATH - PIPES
---	10-YEAR STORM OVERFLOW PATH - OVERLAND



AGENCY APPROVAL

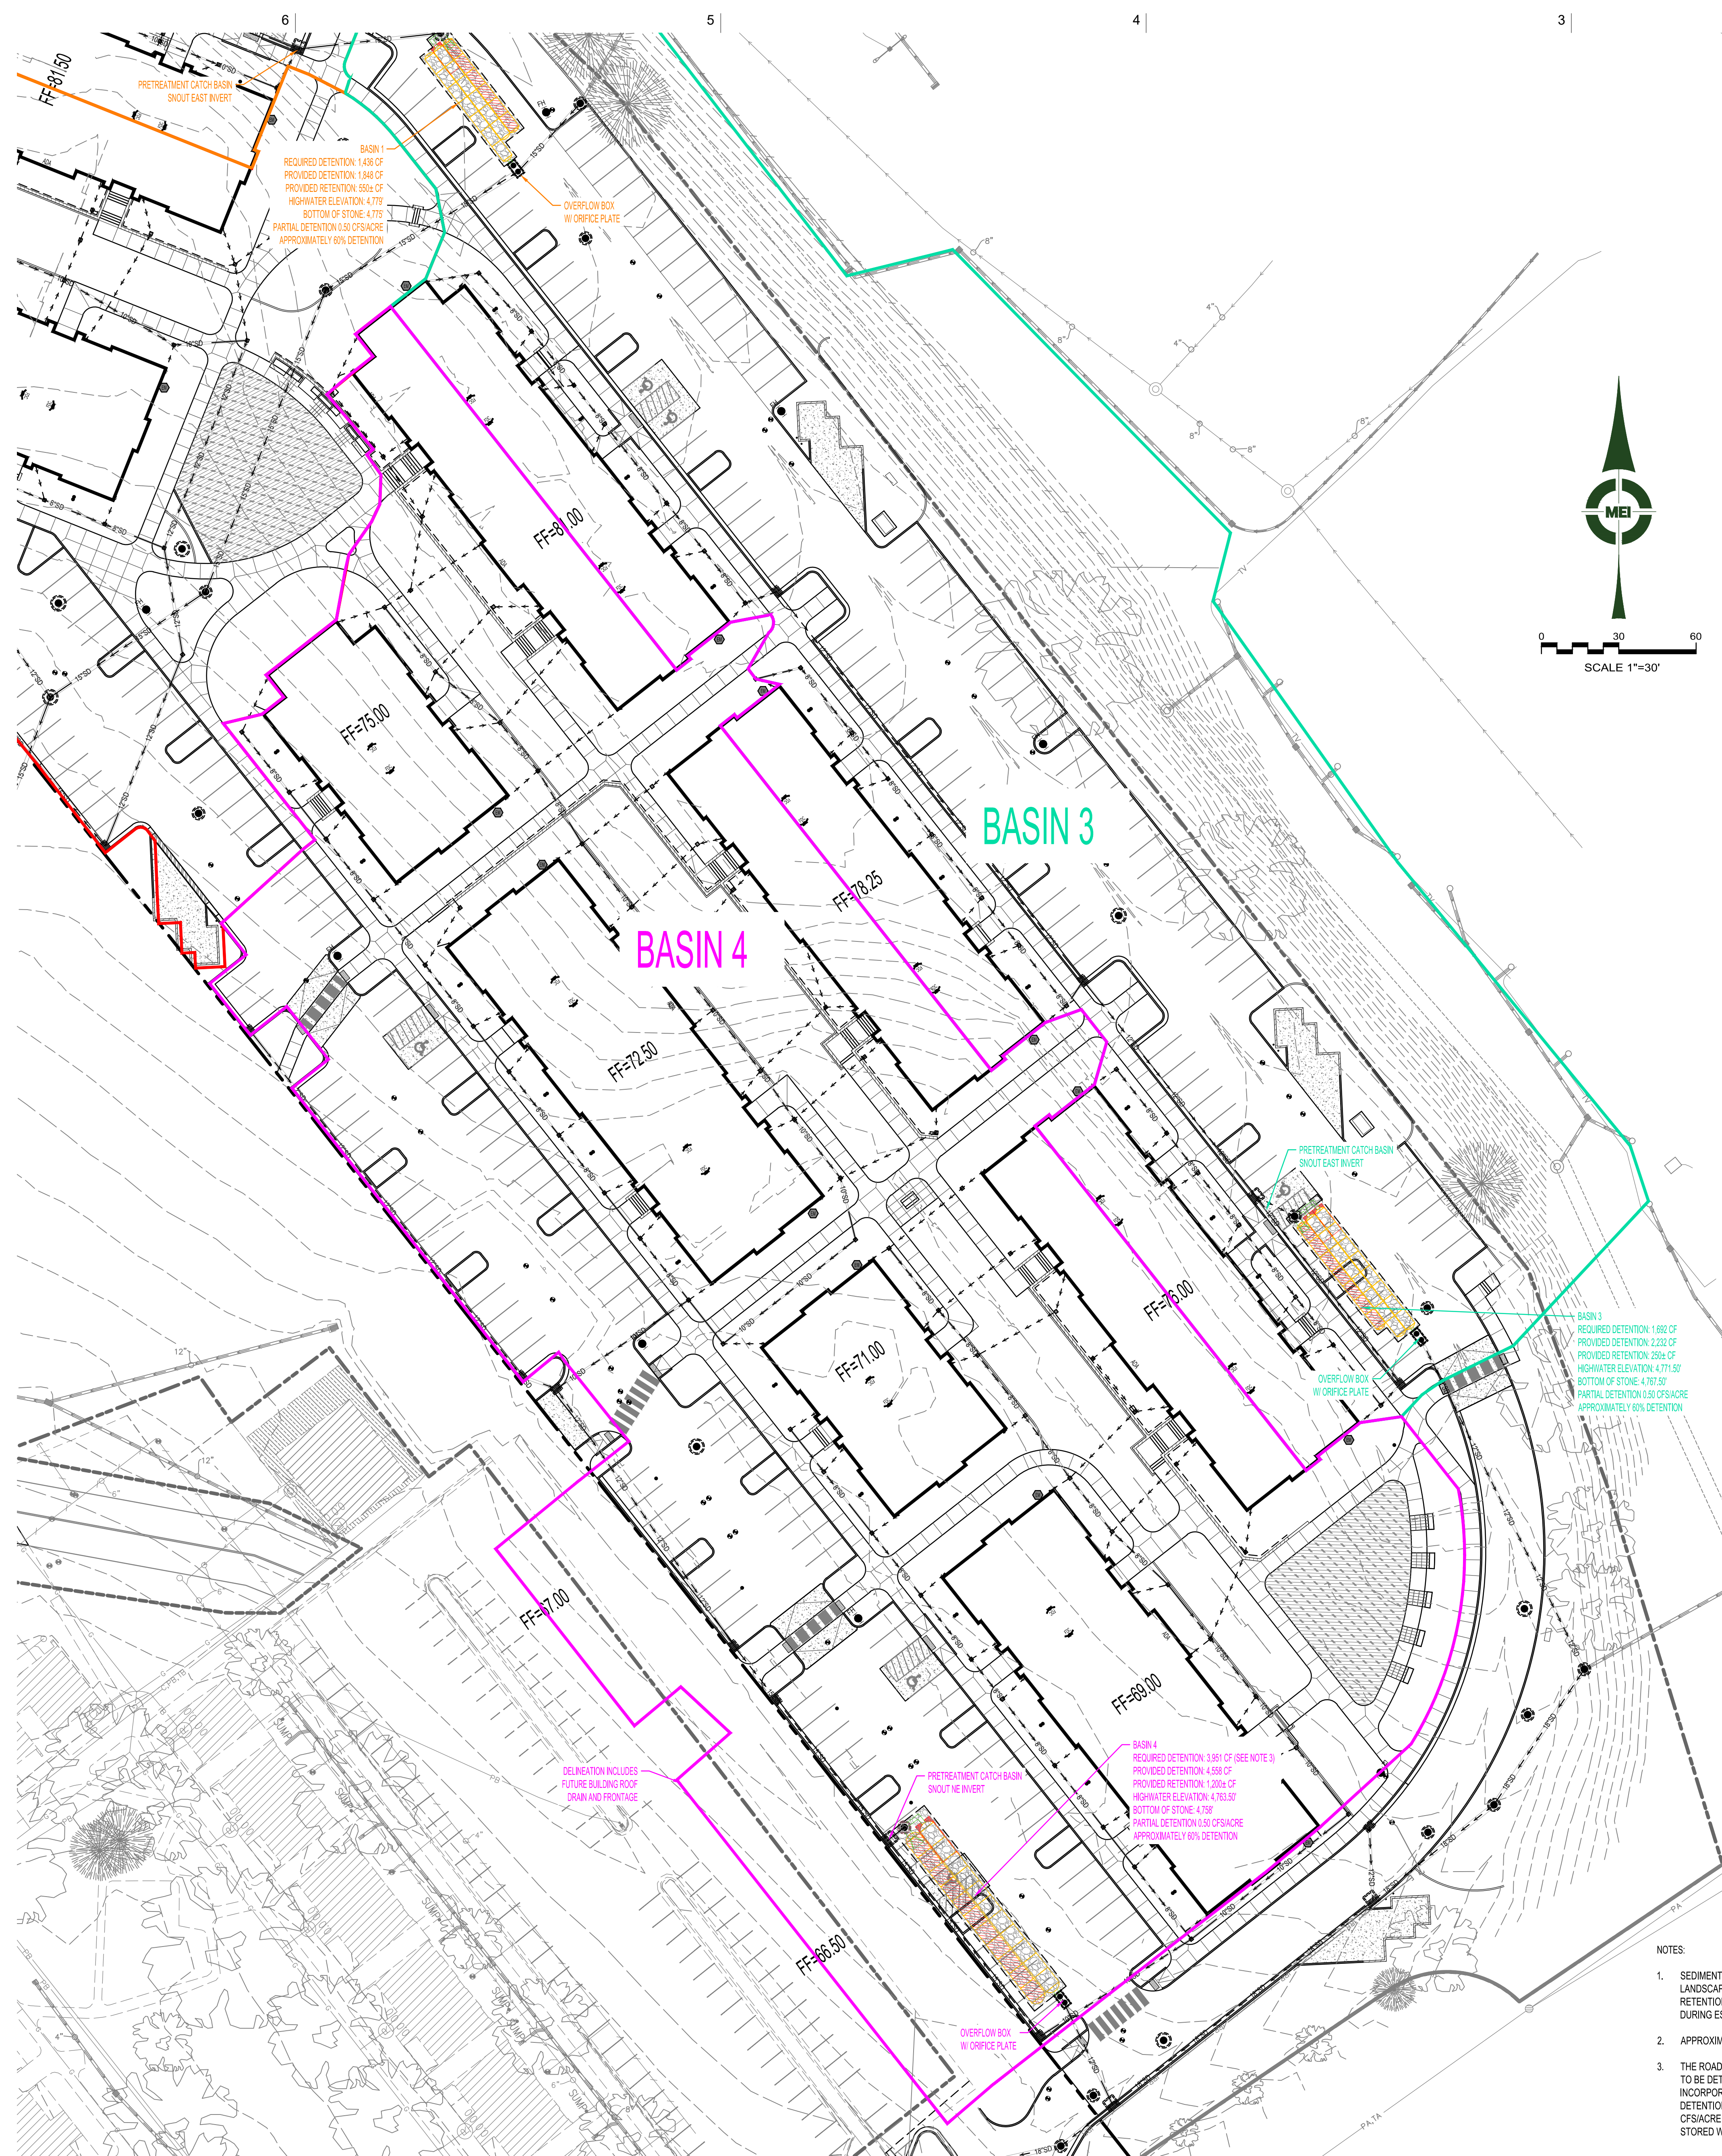

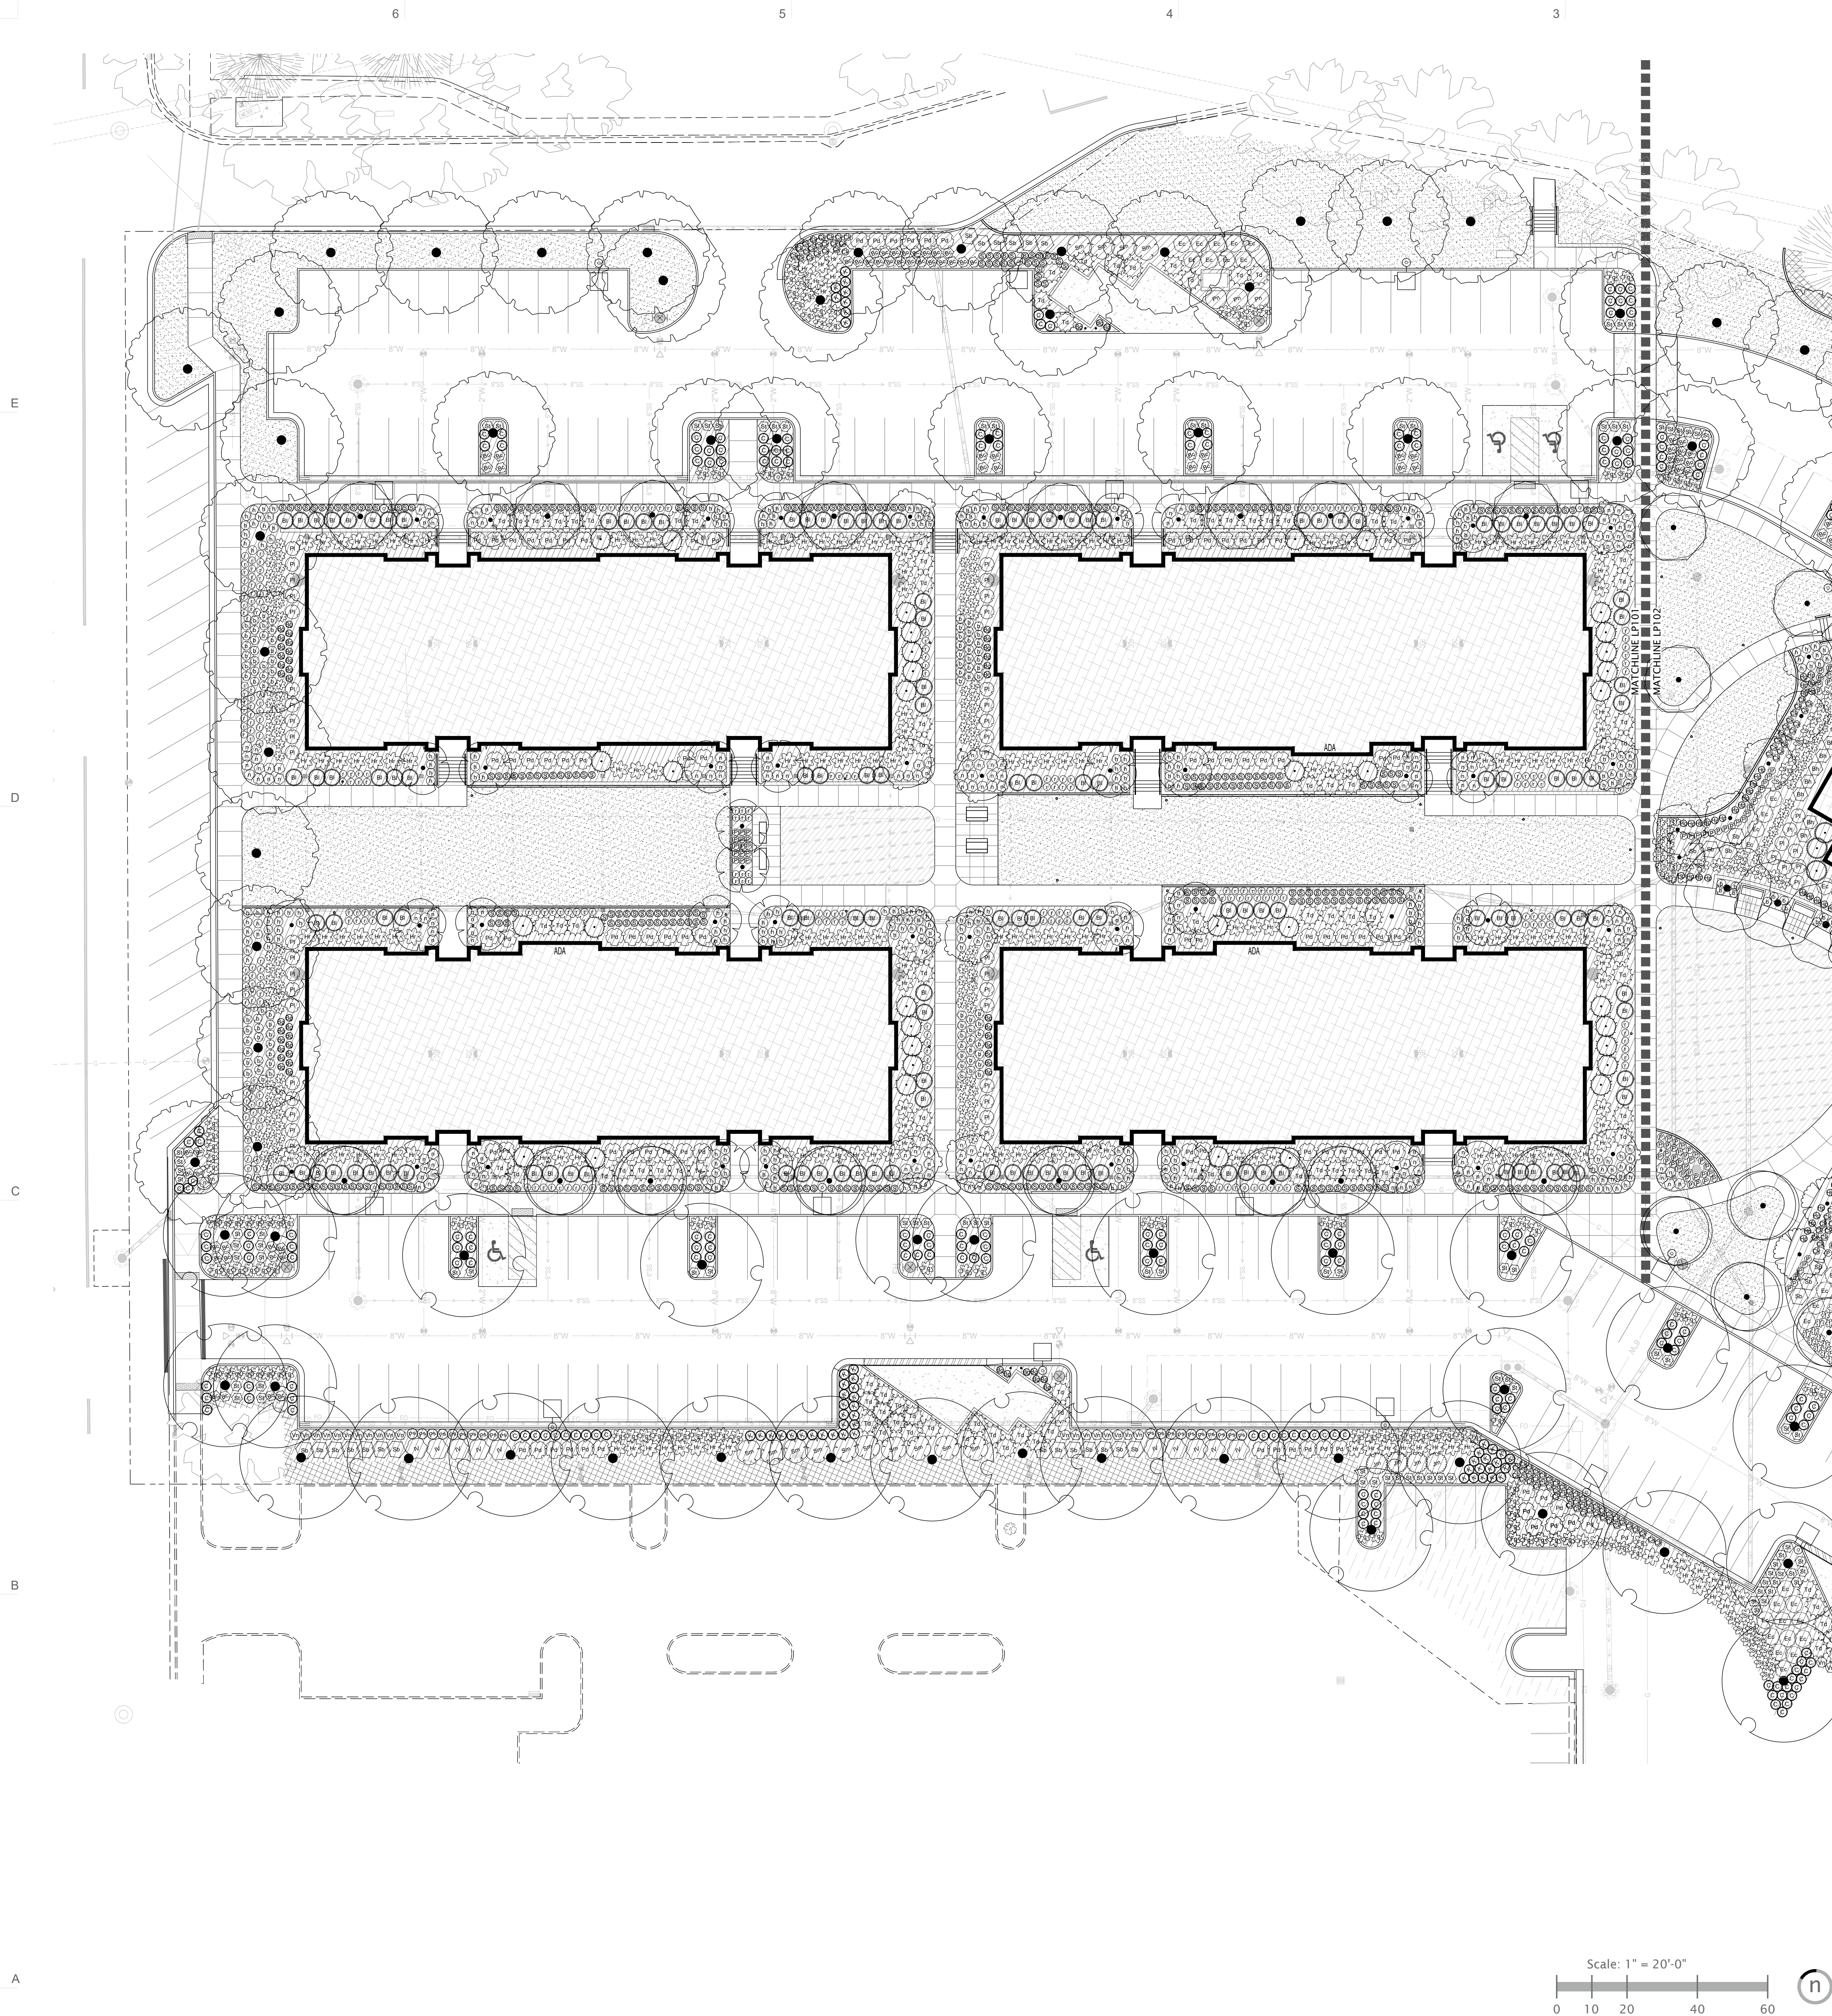

PLANT SCHEDULE	
SYMBOL	BOTANICAL / COMMON NAME
DECIDUOUS TREES	
	ACER PLATANOIDES 'CRIMSON SENTRY' / CRIMSON SENTRY NORWAY MAPLE
	CARPINUS BETULUS 'FRANS FONTAINE' / FRANS FONTAINE HORNBEAM
	QUERCUS ROBUR X ALBA 'JFS-KW2QX' / SKINNY GENES® OAK
EVERGREEN TREES	
	JUNIPERUS SCOPULORUM 'COLOGREEN' / COLOGREEN JUNIPER
	PICEA ABIES 'CUPRESSINA' / CUPRESSINA NORWAY SPRUCE
	PINUS NIGRA 'ARNOLD SENTINEL' / ARNOLD SENTINEL AUSTRIAN PINE
ORNAMENTAL TREES	
	CERCIS CANADENSIS 'APPALACHIAN RED' / APPALACHIAN RED EASTERN REDBUD
	CERCIS CANADENSIS 'MERLOT' / MERLOT EASTERN REDBUD
	MALUS X 'JFS-KW5' / ROYAL RAINDROPS® CRABAPPLE
	SYRINGA RETICULATA / JAPANESE TREE LILAC
STREET TREES	
	ACER GRANDIDENTATUM X SACCHARUM 'HIPZAM' / HIGHLAND PARK® MAPLE
	ACER PLATANOIDES 'EMERALD QUEEN' / EMERALD QUEEN NORWAY MAPLE
	GLEDITSIA TRIACANTHOS INERMIS 'SHADEMASTER' / SHADEMASTER HONEY LOCUST
	PRUNUS SERRULATA 'KWANZAN' / KWANZAN JAPANESE FLOWERING CHERRY
	ZELKOVA SERRATA 'SCHMIDTLOW' / WIRELESS® JAPANESE ZELKOVA
SYMBOL	BOTANICAL / COMMON NAME
SHRUBS	
	BERBERIS THUNBERGII 'BAILELLA' / LAMBRUSCO™ JAPANESE BARBERRY
	BERBERIS THUNBERGII 'CRIMSON PYGMY' / CRIMSON PYGMY JAPANESE BARBERRY
	BUXUS MICROPHYLLA 'BULTHOUSE' / SPRINTER® LITTLELEAF BOXWOOD
	BUXUS SEMPERVIRENS 'GRAHAM BLANDY' / GRAHAM BLANDY COMMON BOXWOOD
	BUXUS SEMPERVIRENS 'HIGHLANDER' / HIGHLANDER COMMON BOXWOOD
	CORNUS ALBA 'BAILHALO'™ / IVORY HALO DOGWOOD
	CORNUS SERICEA 'KELSEY' / KELSEY'S DWARF RED TWIG DOGWOOD
	EUONYMUS ALATUS 'COMPACTUS' / COMPACT BURNING BUSH
	FORSYTHIA X 'GOLD TIDES' / GOLDEN TIDE FORSYTHIA
	HYDRANGEA PANICULATA 'HYLV02' / WHITELIGHT® PANICLE HYDRANGEA
	HYDRANGEA PANICULATA 'RENHY' / VANILLA STRAWBERRY™ PANICLE HYDRANGEA
	JUNIPERUS CHINENSIS PROCUMBENS 'GREEN MOUND' / GREEN MOUND JUNIPER
	PHYSOCARPUS OPULIFOLIUS 'NANUS' / DWARF NINEBARK
	PHYSOCARPUS OPULIFOLIUS 'SMNPOTWC' / TINY WINE® GOLD NINEBARK
	PINUS MUGO 'SLOWMOUND' / SLOWMOUND MUGO PINE
	PRUNUS LAUROCERASUS 'JONG2' / GREENFINITY ENGLISH LAUREL
	SPIRAEA BETULIFOLIA 'TOR' / WHITE FROST™ BIRCHLEAF SPIREA
	SPIRAEA X BUMALDA 'DART'S RED' / DART'S RED SPIREA
	SYRINGA MEYERI 'PALIBIN' / DWARF KOREAN LILAC
	SYRINGA X 'SMNSPH' / BLOOMERANG BALLETT® LILAC
	TAXUS CUSPIDATA 'DENSIFORMIS' / DENSE JAPANESE YEW
	VIBURNUM OPULUS 'NANUM' / DWARF EUROPEAN CRANBERRYBUSH
ORNAMENTAL GRASSES	
	CALAMAGROSTIS X ACUTIFLORA 'KARL FOERSTER' / FEATHER REED GRASS
	HELICTOTRICHON SEMPERVIRENS / BLUE OAT GRASS
	MUHLENBERGIA CAPILLARIS / PINK MUHLY GRASS
	PENNISETUM ALOPECUROIDES 'HA MELN' / HA MELN FOUNTAIN GRASS
PERENNIALS	
	HEMEROCALLIS X 'MALJA' / GOLDEN ZEBRA® DAYLILY
	HEMEROCALLIS X 'ROSY RETURNS' / ROSY RETURNS DAYLILY
	HEUCHERA X BRIZOIDES 'FIREFLY' / FIREFLY CORAL BELLS
	HOSTA X 'VULCAN' / VULCAN HOSTA
	NEPETA X 'WALKER'S LOW' / WALKER'S LOW CATMINT
	VINCA MINOR 'BOWLES' / BOWLES PERIWINKLE
SYMBOL	BOTANICAL / COMMON NAME
GROUND COVERS	
	LANDSCAPE BED
	PATCH AND REPAIR EXISTING LANDSCAPE
	POA PRATENSIS / KENTUCKY BLUEGRASS

AGENCY APPROVAL

#	Date	Revision
---	------	----------

NOT FOR
CONSTRUCTION

BP3 - 100% CD
SET

NEXUS PROJ. #: 25029
CHECKED BY: CAS
DRAWN BY: ES/SL
DATE: 07.17.2026

PLANTING
PLAN
(WT7)

LP101

Branch Panel: 1LA1											
Location: HALL H					Volts: 120/208 Single				A.I.C. Rating: 10K		
Supply From: See PSLD					Phases: 1				Mains Type: MLO		
Mounting: Recessed					Wires: 3				Mains Rating: 100 A		
Enclosure: Type 1											
CKT	Circuit Description	Trip	Class	Poles	A	B	Poles	Class	Trip	Circuit Description	CKT
1	OUTS - BEDROOM	20 A	O	1	900 900		1	O	20 A	OUTS - BEDROOM	2
3	OUTS - LIVING ROOM	20 A	O	1		1080 1012	1	HVAC	20 A	OUT - FURNACE (F-1)	4
5	OUT - MECHANICAL ROOM	20 A	O	1	180 540		1	O	20 A	OUTS - HALLWAY	6
7	OUT - RANGE	50 A	A	2	4160 180	4160 180	1	O	20 A	OUT - KITCHEN	8
9					4160 180		1	O	20 A	OUT - KITCHEN	10
11	*OUT - MICROWAVE	20 A	A	1		1500 900	1	A	20 A	*OUT - DISPOSAL	12
13	OUTS - KITCHEN	20 A	O	1	360 1500		1	A	20 A	*OUT - REFRIGERATOR	14
15	OUT - BATHROOM	20 A	O	1		180 2500	2	ED	30 A	OUT - DRYER	16
17	*OUT - WASHER	20 A	A	1	1500 2500						18
19	OUT - LAUNDRY ROOM	20 A	O	1		180 180	1	O	20 A	OUT - KITCHEN	20
21	CU-1	20 A	HVAC	2	1414 600		1	A	20 A	*OUT - DISHWASHER	22
23						1414 246	1	L	20 A	LIGHTING - UNIT COMMON AREAS	24
25	Spare	20 A	--	1	0 21		1	L	20 A	LIGHTING - BEDROOMS	26
27	Spare	20 A	--	1		0 0	1	--	20 A	Spare	28
29	Spare	20 A	--	1	0 0		1	--	20 A	Spare	30
31	Spare	20 A	--	1		0 0	1	--	20 A	Spare	32
33	Spare	20 A	--	1	0 0		1	--	20 A	Spare	34
35	Spare	20 A	--	1		0 0	1	--	20 A	Spare	36
37	Space	--	--	1	--	--	1	--	--	Space	38
39	Space	--	--	1	--	--	1	--	--	Space	40
41	Space	--	--	1	--	--	1	--	--	Space	42
Total Load:					14753 VA	13527 VA					
Total Amps:					140 A	130 A					
Legend:											
Load Classification		Connected Load		Demand Factor	Estimated Demand		Panel Totals				
A		14320 VA		75.00%	10740 VA						
ED		5000 VA		100.00%	5000 VA		Total Conn. Load: 28280 VA				
L		267 VA		125.00%	333 VA		Total Est. Demand: 23550 VA				
O		4860 VA		75.00%	3645 VA		Total Conn.: 136 A				
HVAC		3840 VA		100.00%	3840 VA		Total Est. Demand: 113 A				
Notes:											
* PROVIDE GFCI RATED CIRCUIT BREAKER, SIZED AS INDICATED.											

Branch Panel: 1LA4					Volts: 120/208 Single				A.I.C. Rating: 10K				
Location: HALL H					Phases: 1				Mains Type: MLO				
Supply From: See PSLD					Wires: 3				Mains Rating: 100 A				
Mounting: Recessed													
Enclosure: Type 1													
CKT	Circuit Description	Trip	Class	Poles	A		B		Poles	Class	Trip	Circuit Description	CKT
1	OUTS - BEDROOM	20 A	O	1	900	900			1	O	20 A	OUTS - BEDROOM	2
3	OUTS - LIVING ROOM	20 A	O	1			1080	1012	1	HVAC	20 A	OUT - FURNACE (F-1)	4
5	OUT - MECHANICAL ROOM	20 A	O	1	180	180			1	O	20 A	OUTS - HALLWAY	6
7	OUT - RANGE	50 A	A	2	4160	180	4160	180	1	O	20 A	OUT - KITCHEN	8
9		50 A	A	2					1	O	20 A	OUT - KITCHEN	10
11	*OUT - MICROWAVE	20 A	A	1			1500	900	1	A	20 A	*OUT - DISPOSAL	12
13	OUTS - KITCHEN	20 A	O	1	360	1500			1	A	20 A	*OUT - REFRIGERATOR	14
15	OUT - BATHROOM	20 A	O	1			180	2500	2	ED	30 A	OUT - DRYER	16
17	*OUT - WASHER	20 A	A	1	1500	2500							18
19	OUT - LAUNDRY	20 A	O	1			180	180	1	O	20 A	OUT - KITCHEN	20
21	CU-1	20 A	HVAC	2	1414	600	1414	246	1	L	20 A	*OUT - DISHWASHER	22
23		20 A							1	L	20 A	LIGHTING - UNIT COMMON AREAS	24
25	Spare	20 A	--	1	0	21			1	L	20 A	LIGHTING - BEDROOMS	26
27	Spare	20 A	--	1			0	0	1	--	20 A	Spare	28
29	Spare	20 A	--	1	0	0			1	--	20 A	Spare	30
31	Spare	20 A	--	1			0	0	1	--	20 A	Spare	32
33	Spare	20 A	--	1	0	0			1	--	20 A	Spare	34
35	Spare	20 A	--	1			0	0	1	--	20 A	Spare	36
37	Space	--	--	1	--	--			1	--	--	Space	38
39	Space	--	--	1	--	--	--	--	1	--	--	Space	40
41	Space	--	--	1	--	--			1	--	--	Space	42
Total Load:					14393 VA		13527 VA						
Total Amps:					137 A		130 A						
Legend:													
Load Classification		Connected Load		Demand Factor		Estimated Demand		Panel Totals					
A		14320 VA		75.00%		10740 VA							
ED		5000 VA		100.00%		5000 VA		Total Conn. Load: 27920 VA					
L		267 VA		125.00%		333 VA		Total Est. Demand: 23280 VA					
O		4500 VA		75.00%		3375 VA		Total Conn.: 134 A					
HVAC		3840 VA		100.00%		3840 VA		Total Est. Demand: 112 A					
Notes:													
* PROVIDE GFCI RATED CIRCUIT BREAKER, SIZED AS INDICATED.													

Branch Panel: 1LB3					Volts: 120/208 Single					A.I.C. Rating: 10K				
Location: HALL J					Phases: 1					Mains Type: MLO				
Supply From: See PSLD					Wires: 3					Mains Rating: 100 A				
Mounting: Recessed														
Enclosure: Type 1														
CKT	Circuit Description	Trip	Class	Poles	A		B		Poles	Class	Trip	Circuit Description	CKT	
1	OUTS - BEDROOM	20 A	O	1	900	900			1	O	20 A	OUTS - BEDROOM	2	
3	OUTS - LIVING ROOM	20 A	O	1			1080	1012	1	HVAC	20 A	OUT - FURNACE (F-1)	4	
5	OUT - MECHANICAL ROOM	20 A	O	1	180	720			1	O	20 A	OUTS - HALLWAY	6	
7	OUT - RANGE	50 A	A	2	4160	180	4160	180	1	O	20 A	OUT - KITCHEN	8	
9		50 A	A	2	4160	180			1	O	20 A	OUT - KITCHEN	10	
11	*OUT - MICROWAVE	20 A	A	1			1500	900	1	A	20 A	*OUT - DISPOSAL	12	
13	OUTS - KITCHEN	20 A	O	1	360	1500			1	A	20 A	*OUT - REFRIGERATOR	14	
15	OUT - BATHROOM	20 A	O	1			180	2500					16	
17	*OUT - WASHER	20 A	O	1	180	2500			2	ED	30 A	OUT - DRYER	18	
19	OUT - LAUNDRY ROOM	20 A	O	1			180	180	1	O	20 A	OUT - KITCHEN	20	
21	CU-1	20 A	HVAC	2	1414	600			1	A	20 A	*OUT - DISHWASHER	22	
23		20 A					1414	1080	1	O	20 A	OUTS - BEDROOM	24	
25	Spare	20 A	--	1	0	720			1	O	20 A	OUTS - ADA OPERATOR	26	
27	Spare	20 A	--	1			0	309	1	L	20 A	LIGHTING - UNIT COMMON AREAS	28	
29	Spare	20 A	--	1	0	32			1	L	20 A	LIGHTING - BEDROOMS	30	
31	Spare	20 A	--	1			0	0	1	--	20 A	Spare	32	
33	Spare	20 A	--	1	0	0			1	--	20 A	Spare	34	
35	Spare	20 A	--	1			0	0	1	--	20 A	Spare	36	
37	Space	--	--	1	--	--			1	--	--	Space	38	
39	Space	--	--	1	--	--			1	--	--	Space	40	
41	Space	--	--	1	--	--			1	--	--	Space	42	
Total Load:					14342 VA		14671 VA							
Total Amps:					138 A		141 A							
Legend:														
Load Classification		Connected Load		Demand Factor		Estimated Demand		Panel Totals						
A		12820 VA		75.00%		9615 VA								
ED		5000 VA		100.00%		5000 VA		Total Conn. Load: 29014 VA						
L		339 VA		125.00%		424 VA		Total Est. Demand: 24137 VA						
O		7020 VA		75.00%		5265 VA		Total Conn.: 139 A						
HVAC		3840 VA		100.00%		3840 VA		Total Est. Demand: 116 A						
Notes:														
* PROVIDE A GFCI RATED CIRCUIT BREAKER, SIZED AS INDICATED.														

4

Branch Panel: 1LA2

Location: HALL H

Supply From: See PSLD

Mounting: Recessed

Enclosure: Type 1

Volts: 120/208 Single

Phases: 1

Wires: 3

A.I.C. Rating: 10K

Mains Type: MLO

Mains Rating: 100 A

CKT	Circuit Description	Trip	Class	Poles	A	B	Poles	Class	Trip	Circuit Description	CKT
1	OUTS - BEDROOM	20 A	O	1	900 720		1	O	20 A	OUTS - BEDROOM	2
3	OUTS - LIVING ROOM	20 A	O	1		1080 1012	1	HVAC	20 A	OUT - FURNACE (F-1)	4
5	OUTS - MECH ROOM	20 A	O	1	180 180		1	O	20 A	OUTS - HALLWAY	6
7		50 A	A	2	4160 180	4160 180	1	O	20 A	OUT - KITCHEN	8
9	OUTS - RANGE	50 A	A	2	4160 180		1	O	20 A	OUT - KITCHEN	10
11	*OUT - MICROWAVE	20 A	A	1		1500 900	1	A	20 A	*OUT - DISPOSAL	12
13	OUTS - KITCHEN	20 A	O	1	360 1500		1	A	20 A	*OUT - REFRIGERATOR	14
15	OUT - BATHROOM	20 A	O	1		180 2500	2	ED	30 A	OUT - DRYER	16
17	*OUT - WASHER	20 A	A	1	1500 2500		1	O	20 A	OUT - KITCHEN	20
19	OUT - LAUNDRY ROOM	20 A	O	1		180 180	1	O	20 A	OUT - KITCHEN	20
21	CU-1	20 A	HVAC	2	1414 600		1	A	20 A	*OUT - DISHWASHER	22
23		20 A				1414 246	1	L	20 A	LIGHTING - UNIT COMMON AREAS	24
25	Spare	20 A	--	1	0 21		1	L	20 A	LIGHTING - BEDROOMS	26
27	Spare	20 A	--	1		0 0	1	--	20 A	Spare	28
29	Spare	20 A	--	1	0 0		1	--	20 A	Spare	30
31	Spare	20 A	--	1		0 0	1	--	20 A	Spare	32
33	Spare	20 A	--	1	0 0		1	--	20 A	Spare	34
35	Spare	20 A	--	1		0 0	1	--	20 A	Spare	36
37	Space	--	--	1	-- --		1	--	--	Space	38
39	Space	--	--	1	-- --	-- --	1	--	--	Space	40
41	Space	--	--	1	-- --		1	--	--	Space	42
					Total Load:	14213 VA					
					Total Amps:	136 A					

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals	
A	14320 VA	75.00%	10740 VA		
ED	5000 VA	100.00%	5000 VA	Total Conn. Load:	27740 VA
L	267 VA	125.00%	333 VA	Total Est. Demand:	23145 VA
O	4320 VA	75.00%	3240 VA	Total Conn.:	133 A
HVAC	3840 VA	100.00%	3840 VA	Total Est. Demand:	111 A

Notes:

* PROVIDE GFCI RATED CIRCUIT BREAKER, SIZED AS INDICATED.